

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		6119.0 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	39.9V x 42.5H
	At 50% of Imax	19.5V x 18.7H
	At 90% of Imax	6.0V x 6.2H
Beam Flux	Total	996.3 lumens per klm.
	To 10% of Imax	774.6 lumens per klm.
	To 50% of Imax	308.0 lumens per klm.
	To 90% of Imax	26.9 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.6 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.5V I:0.0891A P:10.51W PF:1.000 Freq:50.00Hz Lamp Flux:503.97lx1 lm		
NAME: LW-WZB-W55-L6-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411012
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

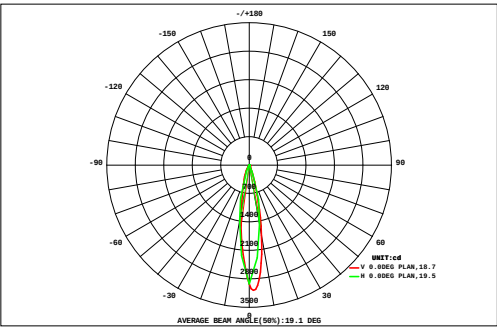

DATA OF LAMP		Eff:47.94lm/W	
MODEL	LW-WZB-W55-L6-RDM-W	Imax(cd)	3084
NOMINAL POWER(W)	10	AVAILABILITY(%)	79.7
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	401.5
NOMINAL FLUX(lm)	503.971	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	504.0
TEST VOLTAGE(V)	220	θ @50%(H,V)	19,19DEG

AREA FLUX DIAGRAM																	UNIT:lm			Φ t	Φ a
27	0.06	0.08	0.10	0.13	0.17	0.21	0.26	0.30	0.33	0.35	0.35	0.34	0.32	0.29	0.25	0.21	0.17	0.13	4.06	0.00	
24	0.07	0.10	0.14	0.19	0.27	0.36	0.45	0.54	0.61	0.65	0.66	0.64	0.60	0.54	0.46	0.39	0.31	0.24	7.21	0.00	
21	0.10	0.15	0.21	0.29	0.40	0.52	0.64	0.75	0.81	0.84	0.83	0.78	0.72	0.63	0.53	0.43	0.34	0.25	9.22	1.37	
18	0.14	0.19	0.28	0.39	0.54	0.69	0.84	0.96	1.02	1.04	1.00	0.93	0.83	0.72	0.60	0.47	0.36	0.26	11.3	5.92	
15	0.13	0.20	0.31	0.49	0.72	1.06	1.59	2.20	2.65	2.76	2.54	2.13	1.68	1.31	1.02	0.81	0.63	0.48	22.7	19.6	
12	0.16	0.26	0.43	0.67	1.00	1.51	2.27	3.07	3.57	3.59	3.19	2.59	2.00	1.52	1.17	0.93	0.72	0.54	29.2	26.5	
9	0.25	0.41	0.69	1.05	1.53	2.37	3.45	4.33	4.64	4.28	3.54	2.71	1.99	1.49	1.14	0.89	0.68	0.49	35.9	33.5	
VERTICAL (DEG)	0.22	0.35	0.60	0.97	1.55	2.55	3.87	5.20	6.04	5.92	4.99	3.90	2.87	2.02	1.44	1.07	0.82	0.61	45.0	42.9	
	0.17	0.27	0.48	0.86	1.54	2.69	4.25	6.04	7.50	7.66	6.56	5.19	3.82	2.60	1.76	1.27	0.97	0.74	54.4	52.8	
	0.32	0.55	1.00	1.69	3.14	5.06	7.13	8.84	9.13	7.72	5.96	4.38	2.94	1.92	1.33	0.99	0.75	0.54	63.4	61.4	
	0.31	0.53	0.95	1.61	2.98	4.82	6.82	8.49	8.86	7.59	5.90	4.36	2.94	1.92	1.33	0.99	0.75	0.54	61.7	59.6	
	0.14	0.21	0.33	0.55	0.80	1.46	2.49	3.74	5.00	5.53	4.91	3.94	2.98	2.09	1.47	1.08	0.82	0.63	38.2	35.6	
	0.18	0.28	0.45	0.70	1.00	1.60	2.41	3.22	3.83	3.92	3.38	2.65	1.98	1.46	1.10	0.84	0.64	0.47	30.1	27.3	
	0.24	0.38	0.61	0.91	1.32	1.92	2.52	2.86	2.69	2.19	1.70	1.22	0.86	0.74	0.69	0.57	0.44	0.29	22.2	17.9	
	0.10	0.14	0.21	0.33	0.48	0.69	1.05	1.46	1.82	2.00	1.89	1.62	1.30	0.99	0.77	0.61	0.48	0.36	16.3	12.4	
	0.08	0.09	0.12	0.17	0.22	0.25	0.37	0.57	0.83	1.06	1.13	1.07	0.93	0.74	0.59	0.47	0.36	0.28	9.34	4.51	
	0.10	0.14	0.18	0.22	0.27	0.27	0.20	0.13	0.09	0.09	0.10	0.15	0.21	0.25	0.23	0.18	0.13	0.09	3.05	0.00	
-27	0.07	0.09	0.12	0.14	0.17	0.18	0.19	0.23	0.25	0.27	0.27	0.26	0.24	0.23	0.21	0.17	0.13	0.10	3.34	0.00	
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)				6	9	12	15	18	21	24	27	
Φ t	2.84	4.42	7.18	11.4	18.1	28.2	40.8	52.9	59.7	57.5	48.9	38.9	29.2	21.5	16.1	12.4	9.50	7.06	466	---	
Φ a	0.00	0.09	1.91	7.00	14.3	25.0	38.2	50.6	57.5	55.6	46.8	36.5	26.3	18.1	11.9	8.07	3.14	0.36	---	401	


one-half-peak spread: U:10.2,D:9.5 , L:9.0,R:9.8 NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.5V I:0.0891A P:10.51W PF:1.000 Freq:50.00Hz Lamp Flux:503.97lx1 lm		
NAME: LWL-WZB-W55-L6-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411012
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

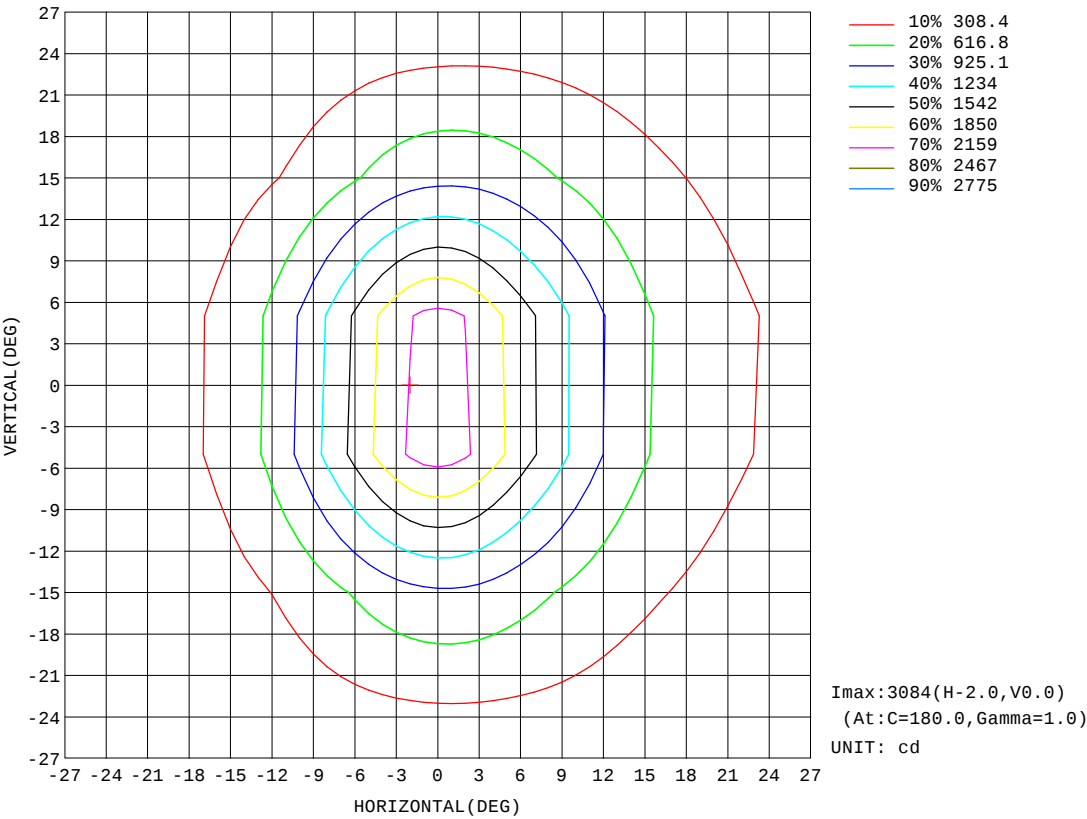


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.5V I:0.0891A P:10.51W PF:1.000 Freq:50.00Hz Lamp Flux:503.97lx1 lm		
NAME: LWL-WZB-W55-L6-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411012
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

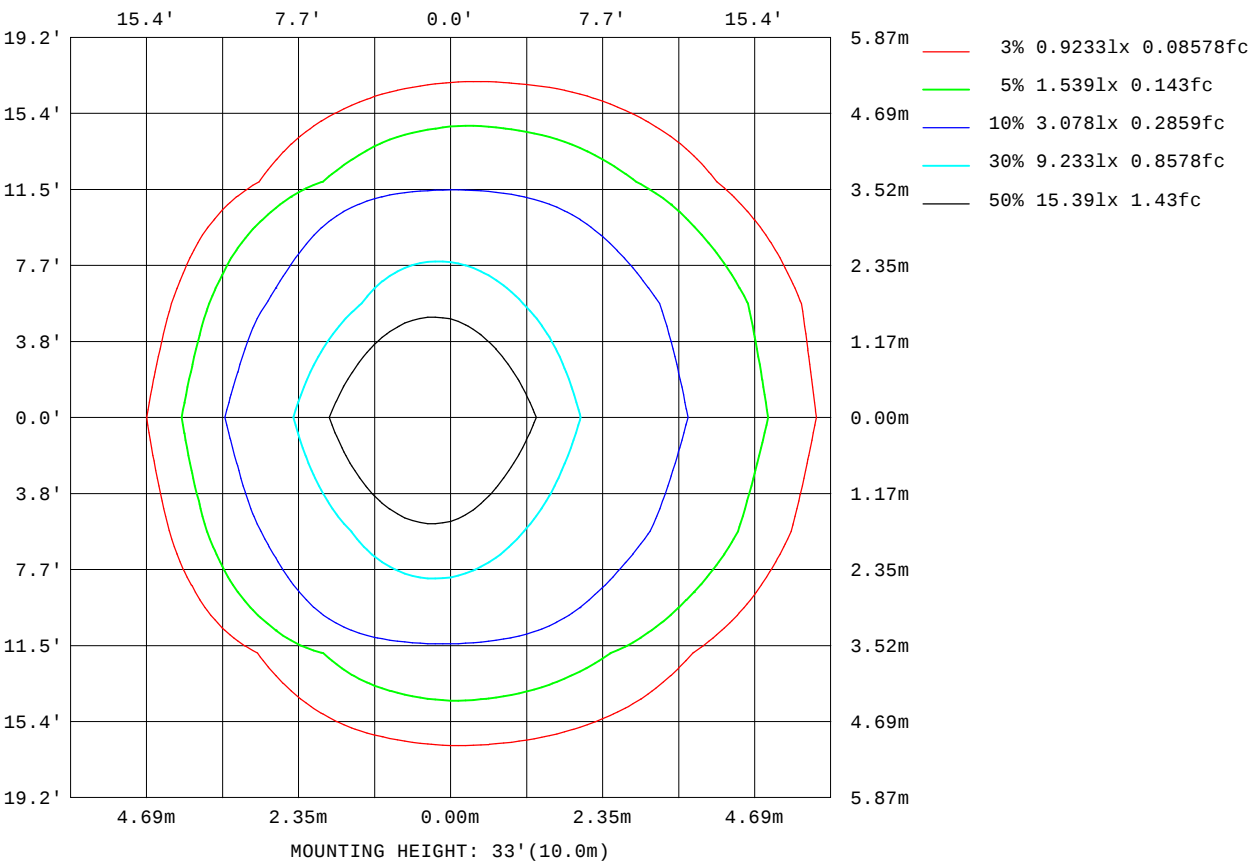

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

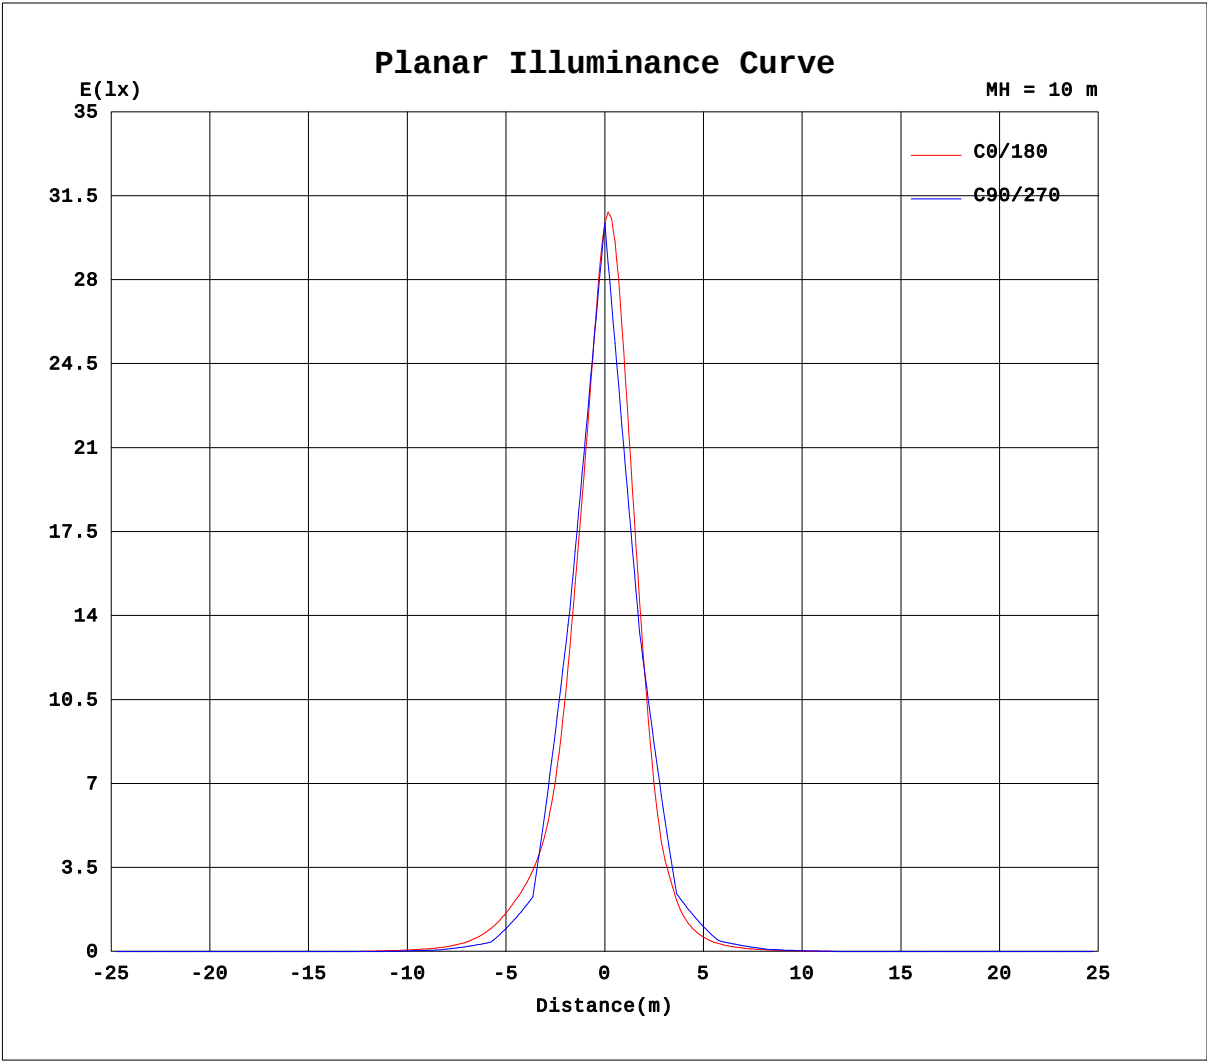


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.5V I:0.0891A P:10.51W PF:1.000 Freq:50.00Hz Lamp Flux:503.97lx1 lm		
NAME: LWL-WZB-W55-L6-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411012
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

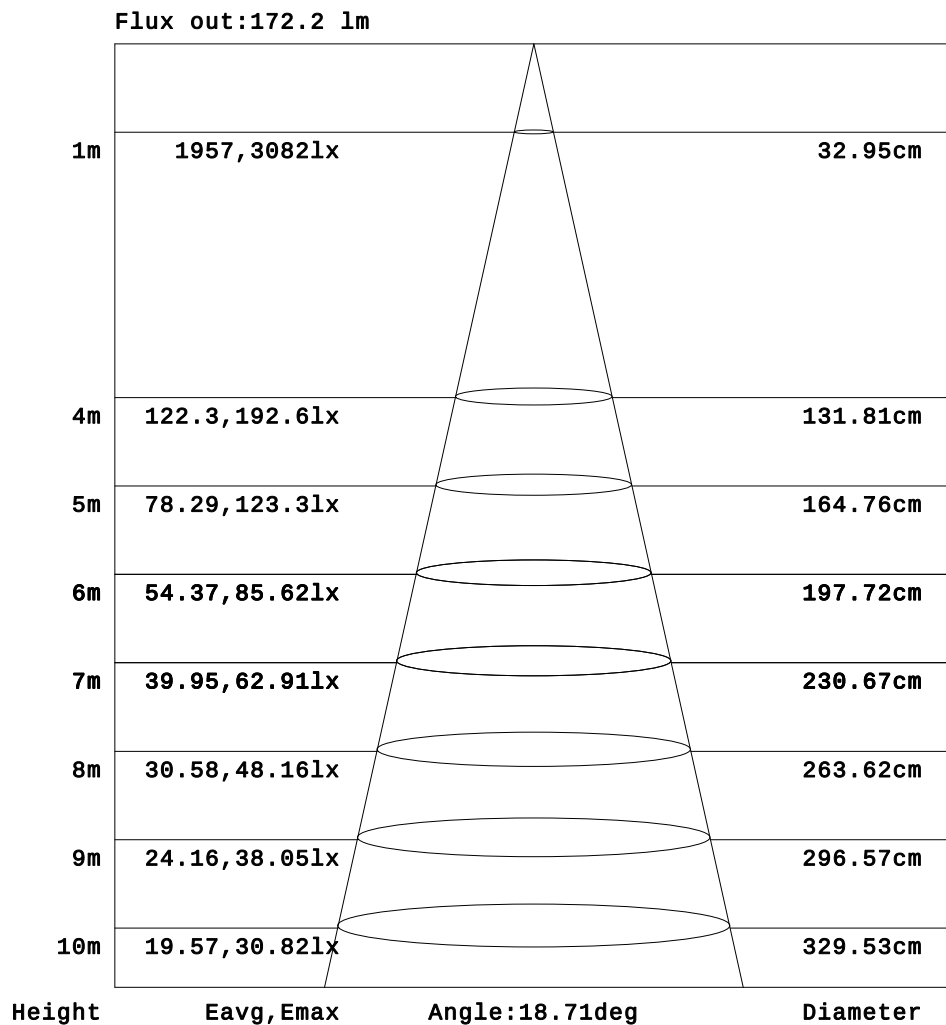

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.5V I:0.0891A P:10.51W PF:1.000 Freq:50.00Hz Lamp Flux:503.971x1 lm		
NAME: LW-WZB-W55-L6-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411012
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: cd		
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.66	0.91
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.59	1.58	1.99	2.26
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.29	1.74	3.21	4.51	5.59	7.41	8.44	9.29
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.71	4.65	7.56	9.88	12.1	14.2	15.6	16.6
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.75	4.29	7.86	11.8	16.5	21.7	27.9	33.9	38.4
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.98	5.29	9.74	13.9	19.6	27.2	36.1	46.7	56.1	62.3
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.92	6.20	11.2	18.0	28.1	44.4	70.3	108	146	167
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.84	5.92	11.0	17.5	29.0	47.8	79.6	132	201	256	278
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.42	5.10	10.7	17.8	30.8	55.3	108	214	407	703	884
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.85	8.73	15.3	26.5	48.7	94.2	205	416	846	1350	1470
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.37	7.09	13.3	22.7	41.8	81.9	182	420	983	1800	2290
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.20	10.2	17.4	31.1	59.8	127	317	771	1758	2825	2924
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.27	6.95	13.1	22.4	41.1	80.7	179	412	946	1748	2238
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.58	8.43	14.9	25.6	46.8	91.4	198	386	750	1246	1383
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.32	4.55	10.3	17.2	29.4	53.2	103	205	370	653	840
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.17	5.29	10.6	16.7	27.3	45.7	77.2	131	201	265	296
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.51	5.41	10.4	17.1	26.8	42.8	69.2	108	149	178
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	4.05	8.78	13.6	19.0	26.5	36.3	48.5	61.9	72.0
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.16	3.41	7.13	11.1	16.3	22.1	29.3	37.5	44.5
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.79	3.79	7.19	10.6	13.3	16.6	19.2	20.8
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.27	2.84	4.69	6.12	8.38	10.4	11.8
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.64	2.00	2.93	3.51
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.74	1.30	1.68
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.5V I:0.0891A P:10.51W PF:1.000 Freq:50.00Hz Lamp Flux:503.971x1 lm		
NAME: LWV-WZB-W55-L6-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411012
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd		
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	1.02	0.64	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	1.76	0.94	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	9.32	8.64	7.37	5.99	4.48	2.71	1.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	16.4	15.6	13.5	10.9	7.56	4.02	0.66	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-35	39.6	37.3	32.4	26.1	19.6	13.9	8.55	4.18	1.37	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-30	61.4	55.8	46.4	36.2	27.0	19.4	12.3	6.03	0.74	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-25	168	152	126	93.5	63.3	40.1	24.9	14.8	6.80	1.55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-20	265	229	180	126	79.2	46.7	28.8	16.7	7.46	0.72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-15	776	541	351	242	159	92.7	50.5	28.4	15.1	5.66	0.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-10	1104	677	424	287	180	99.2	50.6	28.3	14.4	4.71	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-5	1834	1168	642	392	256	148	76.0	39.1	20.9	9.02	1.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
0	2019	1170	611	376	240	130	64.0	33.1	16.9	6.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
5	1810	1173	660	405	266	156	80.2	40.9	21.9	9.53	1.35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
10	1084	704	454	308	199	111	56.8	31.0	15.8	5.56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
15	764	560	383	267	179	107	58.7	32.5	17.4	7.05	0.54	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
20	289	257	207	150	97.2	57.9	35.2	20.6	9.70	2.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
25	185	173	146	113	78.7	50.8	31.8	19.0	9.46	2.44	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
30	74.8	71.1	60.2	47.8	36.0	26.4	17.2	9.23	3.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
35	48.1	47.5	42.4	35.0	27.1	19.9	13.1	6.84	2.67	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
40	21.7	20.8	18.9	16.0	12.2	7.87	3.85	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
45	12.5	12.2	11.0	9.13	6.90	4.78	2.75	0.76	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
50	3.38	2.82	1.83	0.52	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
55	1.74	1.54	1.14	0.55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-07

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: