

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		6024.0 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	39.2V x 39.5H
	At 50% of Imax	17.8V x 18.2H
	At 90% of Imax	4.7V x 6.7H
Beam Flux	Total	998.8 lumens per klm.
	To 10% of Imax	715.2 lumens per klm.
	To 50% of Imax	298.5 lumens per klm.
	To 90% of Imax	28.4 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-19

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.6V I:0.2536A P:34.71W PF:0.6231 Lamp Flux:1519.73x1 lm		
NAME: 8.01.017.0045 20°LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010089
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

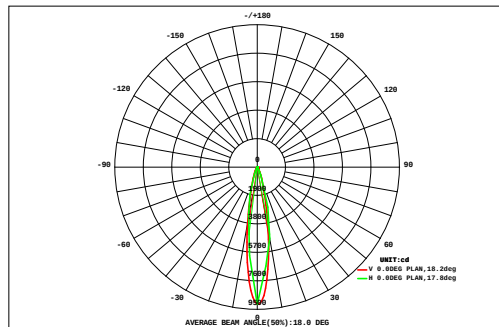

DATA OF LAMP		Eff:43.78lm/W	
MODEL LWW-WZB-W55-L6-RDM		Imax(cd)	9155
NOMINAL POWER(W)	34	AVAILABILITY(%)	73.2
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	1112
NOMINAL FLUX(lm)	1519.73	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1520
TEST VOLTAGE(V)	219.6	θ @50%(H,V)	18,18DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
	27	0.33	0.41	0.51	0.62	0.75	0.88	1.00	1.11	1.18	1.20	1.18	1.10	0.99	0.86	0.72	0.59	0.48	0.39	14.3	0.00	
	24	0.38	0.50	0.67	0.86	1.09	1.35	1.62	1.86	2.06	2.16	2.15	2.01	1.80	1.53	1.26	1.02	0.80	0.62	23.7	0.00	
	21	0.52	0.70	0.93	1.20	1.51	1.85	2.19	2.48	2.68	2.73	2.64	2.39	2.08	1.73	1.39	1.10	0.85	0.64	29.6	9.30	
	18	0.66	0.91	1.21	1.55	1.96	2.38	2.79	3.12	3.31	3.31	3.12	2.76	2.33	1.89	1.49	1.16	0.87	0.64	35.5	19.8	
	15	0.61	0.85	1.19	1.65	2.29	3.27	4.69	6.57	8.41	9.48	9.26	7.89	5.94	4.21	2.98	2.14	1.55	1.13	74.1	63.6	
	12	0.74	1.05	1.48	2.10	3.01	4.44	6.57	9.20	11.6	12.6	11.9	9.74	7.09	4.90	3.41	2.42	1.73	1.24	95.2	86.1	
	9	1.08	1.53	2.15	3.07	4.49	6.70	9.93	13.4	15.7	15.8	13.6	10.0	6.78	4.52	3.12	2.18	1.54	1.09	117	108	
		0.92	1.31	1.87	2.69	3.98	6.20	9.73	13.9	17.7	19.5	18.2	14.6	10.3	6.76	4.32	2.87	1.97	1.37	138	130	
		0.72	1.04	1.50	2.18	3.29	5.44	9.21	14.2	19.5	23.2	23.2	19.5	14.3	9.25	5.63	3.64	2.44	1.69	160	153	
		1.17	1.69	2.47	3.76	6.17	10.6	16.5	22.4	26.6	26.6	22.2	16.1	10.5	6.18	3.80	2.49	1.71	1.18	182	175	
		1.12	1.61	2.35	3.56	5.80	9.92	15.4	20.9	24.9	25.0	21.1	15.4	10.1	6.05	3.74	2.47	1.70	1.18	172	165	
	-9	0.59	0.84	1.17	1.58	2.06	2.74	4.48	7.09	10.3	13.1	14.0	12.3	9.50	6.61	4.28	2.90	2.00	1.41	96.9	87.2	
		0.70	0.98	1.35	1.81	2.31	2.91	4.09	5.67	7.26	8.32	8.28	7.09	5.48	4.03	2.87	2.06	1.48	1.06	67.7	56.4	
	-12	0.85	1.17	1.60	2.15	2.76	3.43	4.16	4.74	4.57	3.53	2.23	1.40	1.02	1.12	1.26	1.11	0.87	0.65	38.6	25.1	
		0.42	0.57	0.76	1.03	1.35	1.73	2.23	2.96	3.79	4.43	4.59	4.16	3.40	2.60	1.97	1.51	1.13	0.84	39.5	25.6	
	-18	0.32	0.41	0.53	0.69	0.86	0.99	1.09	1.34	1.77	2.29	2.67	2.68	2.37	1.91	1.50	1.18	0.91	0.69	24.2	8.16	
		0.39	0.49	0.62	0.75	0.88	0.96	0.92	0.71	0.48	0.35	0.31	0.35	0.43	0.51	0.51	0.45	0.37	0.30	9.79	0.00	
	-24	0.29	0.36	0.44	0.53	0.62	0.68	0.68	0.65	0.71	0.74	0.75	0.72	0.66	0.58	0.53	0.47	0.39	0.32	10.1	0.00	
-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)				6	9	12	15	18	21	24	27		
Φ t	11.8	16.4	22.8	31.8	45.2	66.5	97.2	132	162	174	161	130	95.1	65.2	44.8	31.7	22.8	16.4	13.29	---		
Φ a	0.00	0.00	4.48	12.9	32.1	55.6	88.1	125	155	168	156	123	85.9	54.6	33.0	15.8	2.01	0.00	---	1112		

one-half-peak spread: U:7.2,D:10.8 , L:8.8,R:9.5


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-19

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.6V I:0.2536A P:34.71W PF:0.6231 Lamp Flux:1519.73x1 lm		
NAME: 8.01.017.0045 20°LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010089
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

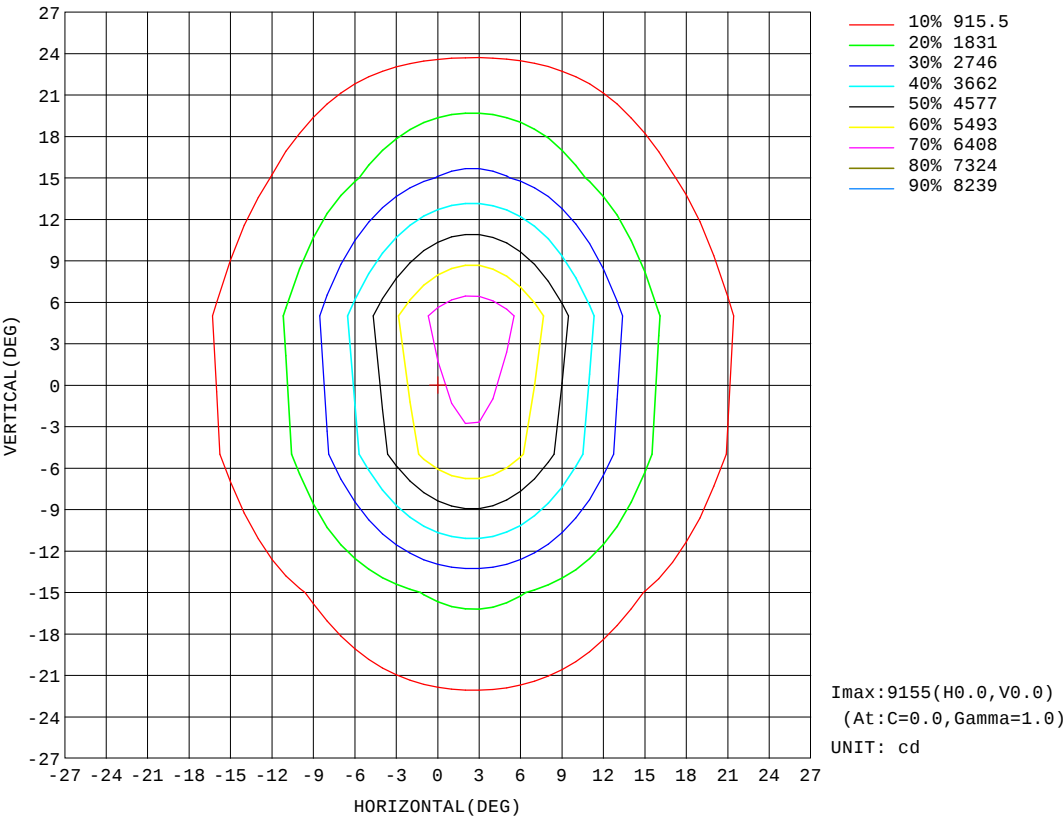


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-19

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:219.6V I:0.2536A P:34.71W PF:0.6231 Lamp Flux:1519.73x1 lm		
NAME: 8.01.017.0045 20°LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010089
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

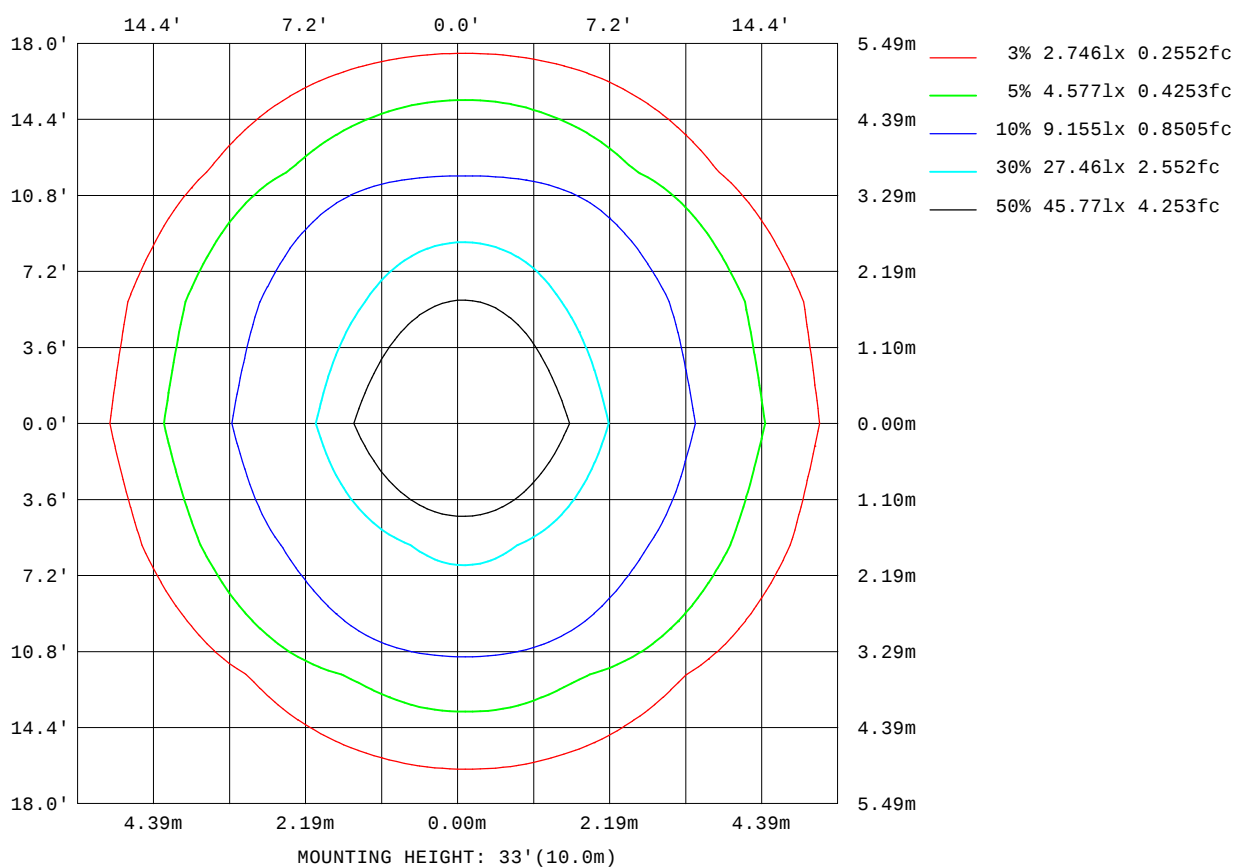


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-19

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.6V I:0.2536A P:34.71W PF:0.6231 Lamp Flux:1519.73x1 lm		
NAME: 8.01.017.0045 20°LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010089
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

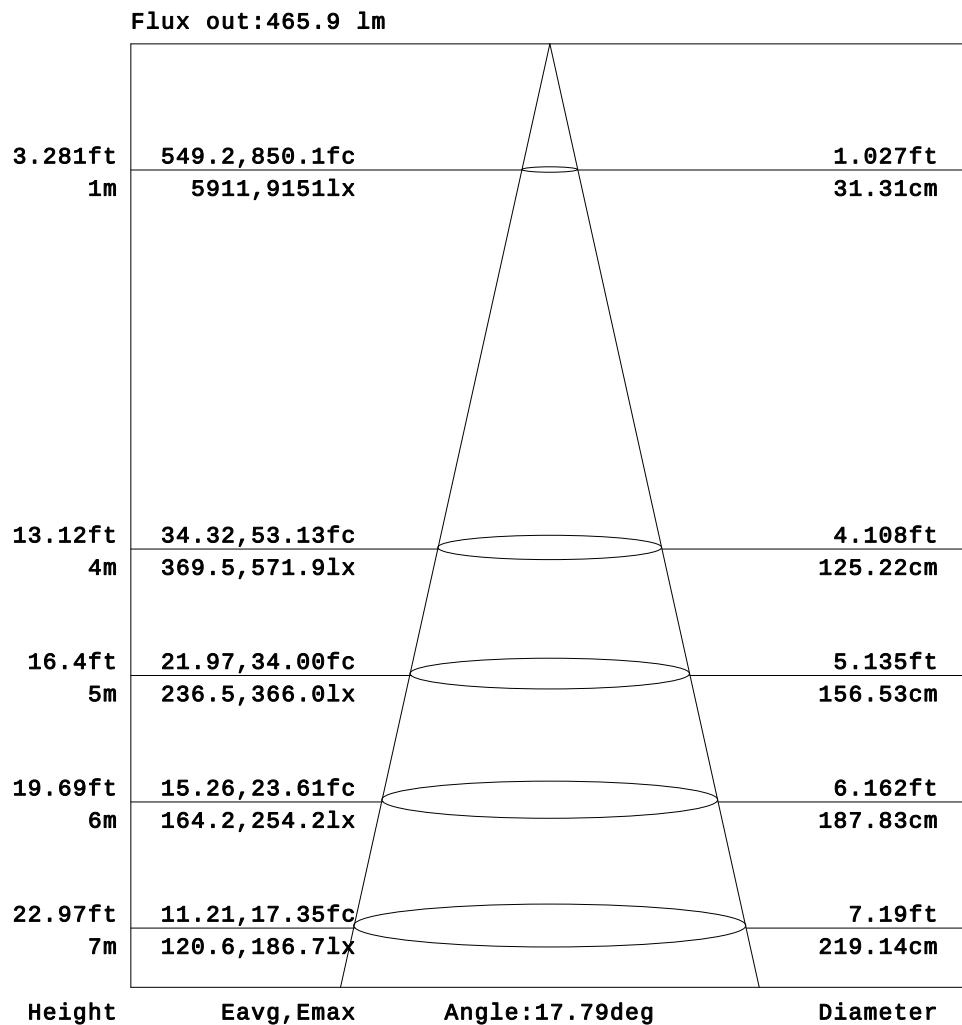


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-19

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

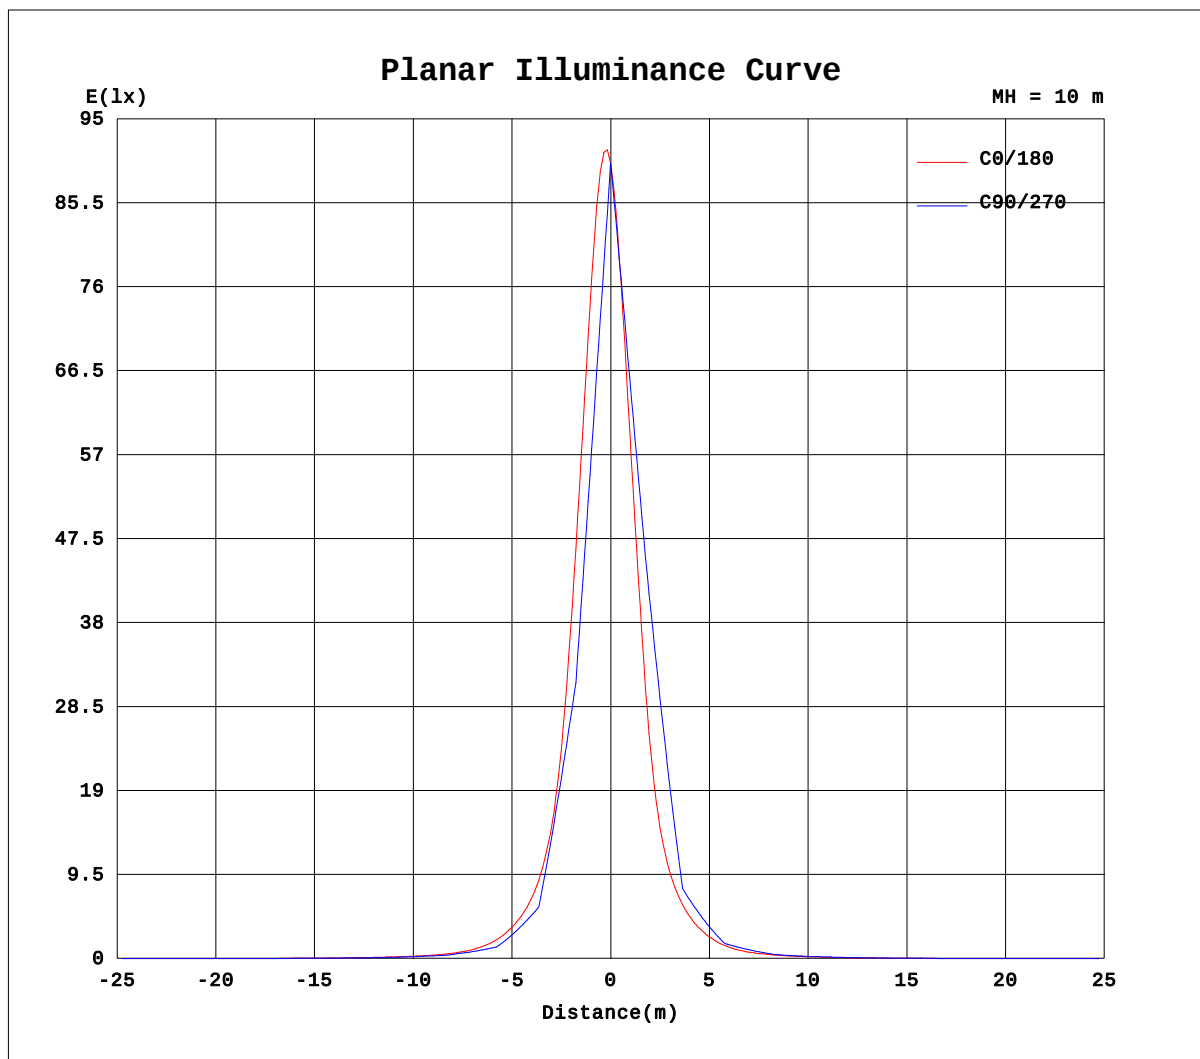

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 27.1DEG
Operators: QC1
Test Date: 2024-01-19

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 61%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.6V I:0.2536A P:34.71W PF:0.6231 Lamp Flux:1519.73x1 lm		
NAME: 8.01.017.0045 20°LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010089
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.14	0.36	1.14
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.38	0.30	1.34	2.59
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.44	1.38	3.17	4.82	5.77	6.94	8.46	9.15	9.77	11.2
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.44	4.03	7.86	10.5	12.3	15.1	17.5	18.2	19.4	20.5
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.31	2.98	5.97	9.02	12.9	16.8	19.8	23.0	26.3	28.6	30.4	31.8
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.71	8.07	12.8	16.8	21.3	25.8	29.6	33.6	37.2	40.5	42.7	43.8
-45	0.00	0.00	0.00	0.00	0.00	0.00	1.92	4.64	10.3	16.3	21.7	27.2	33.5	39.9	46.8	53.0	58.3	62.8	65.3
-40	0.00	0.00	0.00	0.00	0.00	0.70	5.63	11.0	17.4	24.2	30.8	38.1	46.3	55.8	65.3	73.2	80.2	85.5	87.6
-35	0.00	0.00	0.00	0.00	0.00	0.39	6.13	12.4	19.1	26.8	35.4	45.6	57.3	69.7	84.0	100	118	135	146
-30	0.00	0.00	0.00	0.00	0.00	3.93	11.5	19.2	26.7	36.1	47.5	62.2	78.0	94.5	115	142	170	195	207
-25	0.00	0.00	0.00	0.00	0.00	2.28	10.4	18.9	27.5	38.0	52.1	69.3	90.3	121	168	236	318	397	452
-20	0.00	0.00	0.00	0.00	0.00	7.01	15.9	25.4	36.0	50.3	69.5	91.7	124	181	269	394	531	652	711
-15	0.00	0.00	0.00	0.00	0.00	5.14	13.8	23.4	34.3	48.9	69.1	94.4	137	216	351	564	882	1404	1934
-10	0.00	0.00	0.00	0.00	2.02	9.78	19.0	29.7	43.1	62.4	87.0	124	203	345	580	956	1594	2638	3326
-5	0.00	0.00	0.00	0.00	0.23	7.37	16.3	26.3	38.8	56.6	80.7	115	185	323	564	1004	1992	3962	5928
0	0.00	0.00	0.00	0.00	3.68	11.6	21.3	32.1	46.8	68.8	97.3	149	258	465	831	1630	3806	7058	9155
5	0.00	0.00	0.00	0.00	0.23	7.45	16.4	26.5	39.2	57.3	82.2	118	194	341	596	1073	2184	4414	6641
10	0.00	0.00	0.00	0.00	2.16	9.96	19.4	30.2	44.1	64.5	90.8	134	226	391	665	1158	2155	3776	4833
15	0.00	0.00	0.00	0.00	0.00	5.38	14.0	23.8	35.3	50.8	72.5	101	153	251	417	684	1150	1960	2770
20	0.00	0.00	0.00	0.00	0.00	7.32	16.2	26.1	37.6	53.3	74.3	101	146	225	351	515	707	879	963
25	0.00	0.00	0.00	0.00	0.00	2.65	10.7	19.4	28.7	40.2	55.8	75.5	102	144	212	305	418	530	606
30	0.00	0.00	0.00	0.00	0.00	4.32	12.0	20.0	28.3	38.7	52.0	68.5	87.3	110	142	182	223	254	268
35	0.00	0.00	0.00	0.00	0.00	0.61	6.70	13.3	20.3	28.6	38.2	50.1	63.8	79.2	99.0	123	148	170	183
40	0.00	0.00	0.00	0.00	0.00	1.29	6.57	12.1	18.7	25.8	33.2	42.1	52.3	63.3	74.7	84.4	93.2	99.5	102
45	0.00	0.00	0.00	0.00	0.00	0.00	2.27	5.66	11.5	17.7	23.4	29.7	37.0	44.8	53.0	60.6	67.3	72.8	75.9
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.63	9.28	14.2	18.2	23.0	27.9	32.7	37.7	42.3	46.3	49.2	50.7
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.78	3.50	7.03	10.2	14.2	18.3	21.8	25.5	29.2	32.3	34.6	36.3
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.33	2.39	5.11	8.81	11.6	13.6	16.4	18.8	20.2	21.5	22.4
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.83	1.92	3.66	5.32	6.37	7.60	9.55	10.7	11.7	13.0
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	1.53	1.89	2.97	3.93
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.58	0.87	1.21	1.88
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-19

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.6V I:0.2536A P:34.71W PF:0.6231 Lamp Flux:1519.73x1 lm		
NAME: 8.01.017.0045 20°LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010089
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	1.13	0.56	0.77	0.57	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	1.74	1.17	1.61	0.35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	11.3	10.3	10.2	9.31	7.42	6.56	5.58	3.82	2.33	1.43	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	20.0	19.2	18.5	16.5	14.0	12.5	9.89	6.26	3.91	1.92	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	32.1	31.1	29.8	27.5	24.4	21.6	18.6	14.6	11.2	8.09	3.84	1.35	0.00	0.00	0.00	0.00	0.00	0.00
-50	43.6	42.1	39.5	36.2	32.4	28.4	24.3	19.9	16.1	11.1	5.51	1.22	0.00	0.00	0.00	0.00	0.00	0.00
-45	65.9	63.9	59.7	54.6	48.6	42.1	35.7	29.4	23.8	18.2	12.0	6.49	2.49	0.00	0.00	0.00	0.00	0.00
-40	87.3	82.9	76.1	68.5	59.6	50.6	42.0	34.2	27.2	20.4	13.9	8.12	2.87	0.00	0.00	0.00	0.00	0.00
-35	147	139	123	105	87.0	72.2	59.8	48.4	37.9	29.0	21.0	14.1	7.30	0.84	0.00	0.00	0.00	0.00
-30	202	183	156	126	102	83.8	68.3	53.8	41.1	31.0	22.7	14.7	6.33	0.00	0.00	0.00	0.00	0.00
-25	456	405	328	247	177	126	92.7	71.7	54.7	40.4	29.4	20.3	11.2	2.90	0.00	0.00	0.00	0.00
-20	679	570	435	308	206	137	98.4	75.3	56.1	40.3	28.7	18.6	9.14	1.07	0.00	0.00	0.00	0.00
-15	1944	1428	906	583	367	226	141	96.6	71.3	51.2	36.1	24.6	14.6	5.53	0.00	0.00	0.00	0.00
-10	2864	1821	1083	664	401	232	142	95.4	69.3	48.6	33.8	22.3	12.4	3.75	0.00	0.00	0.00	0.00
-5	5887	3881	1969	1016	578	334	191	117	82.4	58.5	40.3	27.5	17.2	7.57	0.21	0.00	0.00	0.00
0	7506	4237	1886	949	530	297	171	106	75.0	51.9	35.7	24.1	13.9	4.97	0.00	0.00	0.00	0.00
5	6593	4310	2147	1086	610	350	200	121	84.1	59.5	40.9	27.8	17.4	7.84	0.21	0.00	0.00	0.00
10	4106	2448	1323	762	450	258	154	101	72.0	50.2	34.7	23.0	12.9	4.23	0.00	0.00	0.00	0.00
15	2773	1957	1151	695	425	258	157	104	75.1	53.5	37.4	25.4	15.1	6.06	0.00	0.00	0.00	0.00
20	910	743	547	378	248	161	109	81.0	59.6	42.3	29.8	19.3	9.64	1.50	0.00	0.00	0.00	0.00
25	608	530	416	304	213	147	104	78.3	59.0	43.0	30.9	21.2	11.7	3.29	0.00	0.00	0.00	0.00
30	259	231	192	152	118	94.5	75.9	59.4	44.6	33.1	23.9	15.5	6.69	0.00	0.00	0.00	0.00	0.00
35	183	171	150	125	102	82.7	67.5	53.8	41.7	31.5	22.8	15.5	8.03	0.98	0.00	0.00	0.00	0.00
40	101	95.3	87.6	78.9	68.4	58.3	47.9	38.3	30.2	22.6	15.6	9.53	3.47	0.00	0.00	0.00	0.00	0.00
45	76.1	73.6	68.6	62.8	55.7	48.2	40.8	33.3	26.7	20.4	13.7	7.99	3.28	0.00	0.00	0.00	0.00	0.00
50	50.2	48.3	45.1	41.4	36.9	32.4	27.6	22.8	18.3	12.9	6.95	2.47	0.00	0.00	0.00	0.00	0.00	0.00
55	36.5	35.5	33.9	31.4	28.1	24.9	21.7	17.4	13.5	10.0	5.18	2.02	0.31	0.00	0.00	0.00	0.00	0.00
60	22.1	21.5	20.8	19.0	16.6	15.1	12.5	8.61	6.11	3.64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	13.0	12.3	12.1	11.2	9.02	7.85	6.89	5.06	3.49	2.40	0.56	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	3.22	2.88	3.00	1.79	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	1.81	1.42	1.51	1.25	0.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-19

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks: