

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		5849.3 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	39.9V x 40.0H
	At 50% of Imax	17.7V x 18.4H
	At 90% of Imax	5.0V x 7.1H
Beam Flux	Total	998.7 lumens per klm.
	To 10% of Imax	720.0 lumens per klm.
	To 50% of Imax	294.3 lumens per klm.
	To 90% of Imax	29.1 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-18

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:226.9V I:0.2358A P:32.85W PF:0.6140 Lamp Flux:2954.33x1 lm		
NAME: 8.01.017.0046 20°LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010086
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

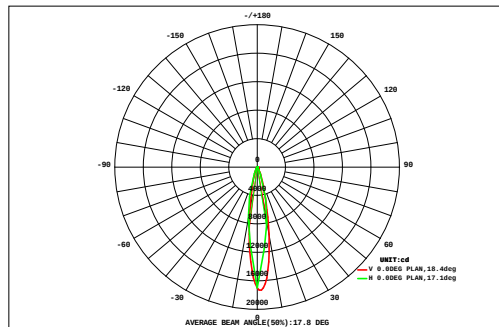

DATA OF LAMP		Eff:89.92lm/W	
MODEL LWW-WZB-W55-L6-RDM		Imax(cd)	17281
NOMINAL POWER(W)	32	AVAILABILITY(%)	73.7
RATED VOLTAGE(V)	226	Avai. FLUX(lm)	2179
NOMINAL FLUX(lm)	2954.33	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	2954
TEST VOLTAGE(V)	226.9	θ @50%(H,V)	18,18DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
	27	0.57	0.69	0.85	1.04	1.27	1.51	1.77	1.99	2.15	2.23	2.21	2.09	1.90	1.66	1.40	1.15	0.93	0.76	26.2	0.00	
	24	0.61	0.79	1.04	1.36	1.78	2.25	2.77	3.26	3.66	3.91	3.96	3.79	3.45	2.98	2.45	1.96	1.53	1.16	42.7	0.00	
	21	0.81	1.07	1.44	1.91	2.49	3.13	3.79	4.37	4.80	4.98	4.90	4.55	4.02	3.36	2.69	2.10	1.59	1.19	53.2	12.3	
	18	1.02	1.38	1.87	2.50	3.24	4.06	4.86	5.53	5.95	6.06	5.82	5.28	4.55	3.69	2.89	2.19	1.62	1.19	63.7	33.6	
	15	0.92	1.30	1.86	2.67	3.80	5.24	7.38	10.3	13.4	15.6	16.0	14.5	11.7	8.66	6.08	4.38	3.12	2.18	129	110	
	12	1.11	1.61	2.35	3.45	4.95	7.00	10.2	14.3	18.4	20.9	20.8	18.2	14.2	10.2	7.03	4.99	3.50	2.40	165	149	
	9	1.61	2.38	3.50	5.18	7.28	10.4	15.3	20.8	25.3	26.8	24.6	19.7	14.1	9.45	6.49	4.52	3.05	2.05	203	188	
		1.38	2.04	3.04	4.54	6.58	9.91	15.3	22.4	29.6	34.1	34.0	29.3	22.1	14.9	9.56	6.20	4.16	2.76	252	238	
		1.08	1.61	2.44	3.69	5.61	9.07	14.8	23.6	33.7	41.7	44.0	39.7	30.8	21.0	12.9	8.07	5.39	3.56	303	291	
		1.83	2.78	4.26	6.40	10.1	17.0	27.2	39.0	48.6	51.6	46.7	36.1	24.4	14.8	8.75	5.64	3.70	2.37	351	339	
		1.76	2.67	4.07	6.13	9.65	16.1	25.8	37.0	46.3	49.5	45.2	35.3	24.1	14.8	8.83	5.70	3.76	2.42	339	326	
	-9	0.94	1.35	1.96	2.89	3.97	5.53	8.33	13.2	19.6	25.7	28.8	27.3	22.2	15.9	10.4	6.75	4.59	3.10	203	186	
		1.15	1.66	2.39	3.48	4.75	6.38	8.90	12.4	16.1	18.9	19.4	17.4	13.8	10.0	7.00	4.82	3.34	2.29	154	136	
	-12	1.43	2.07	2.97	4.29	5.89	7.82	10.3	12.6	13.4	12.2	9.54	6.60	4.38	3.30	3.08	2.61	1.88	1.34	106	82.5	
	-15	0.74	1.00	1.37	1.88	2.62	3.48	4.60	6.21	8.10	9.77	10.5	10.0	8.49	6.58	4.78	3.56	2.60	1.86	88.1	65.0	
	-18	0.60	0.77	1.00	1.28	1.68	2.04	2.35	2.90	3.81	4.96	5.91	6.22	5.76	4.78	3.60	2.76	2.09	1.53	54.1	22.8	
	-21	0.77	0.99	1.26	1.57	1.89	2.16	2.24	1.93	1.38	1.00	0.81	0.77	0.86	0.97	1.06	0.93	0.77	0.64	22.0	0.00	
	-24	0.59	0.72	0.90	1.10	1.31	1.51	1.61	1.51	1.60	1.72	1.75	1.70	1.56	1.38	1.17	1.02	0.85	0.70	22.7	0.00	
-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)				6	9	12	15	18	21	24	27		
Φ t	18.9	26.9	38.6	55.4	78.9	115	167	233	296	332	325	278	212	148	100	69.3	48.5	33.5	2577	---		
Φ a	0.00	0.00	4.43	21.1	52.8	91.6	148	218	282	319	313	264	195	131	81.0	42.7	12.5	0.48	---		2179	

one-half-peak spread: U:8.6,D:9.3 , L:9.8,R:8.8


NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-18

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:226.9V I:0.2358A P:32.85W PF:0.6140 Lamp Flux:2954.33x1 lm		
NAME: 8.01.017.0046 20°LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010086
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

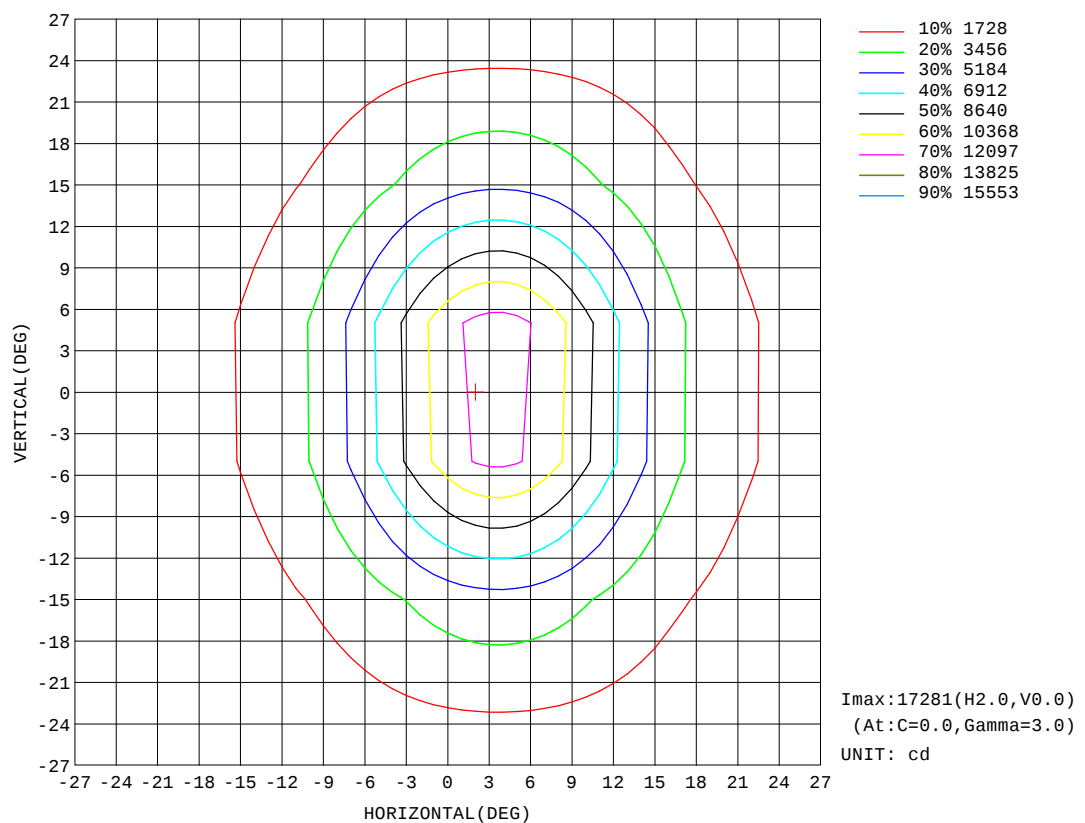


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-18

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:226.9V I:0.2358A P:32.85W PF:0.6140 Lamp Flux:2954.33x1 lm		
NAME: 8.01.017.0046 20°LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010086
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

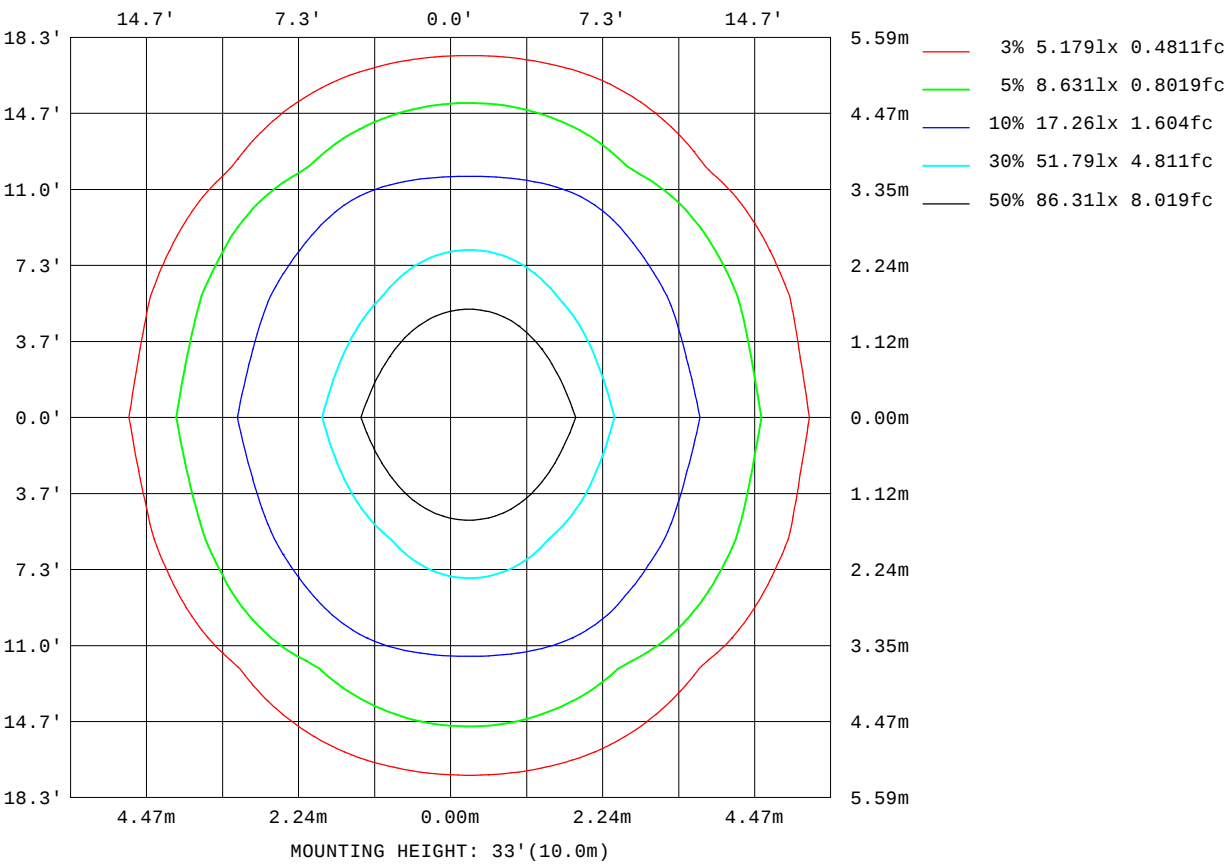


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-18

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:226.9V I:0.2358A P:32.85W PF:0.6140 Lamp Flux:2954.33x1 lm		
NAME: 8.01.017.0046 20°LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010086
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

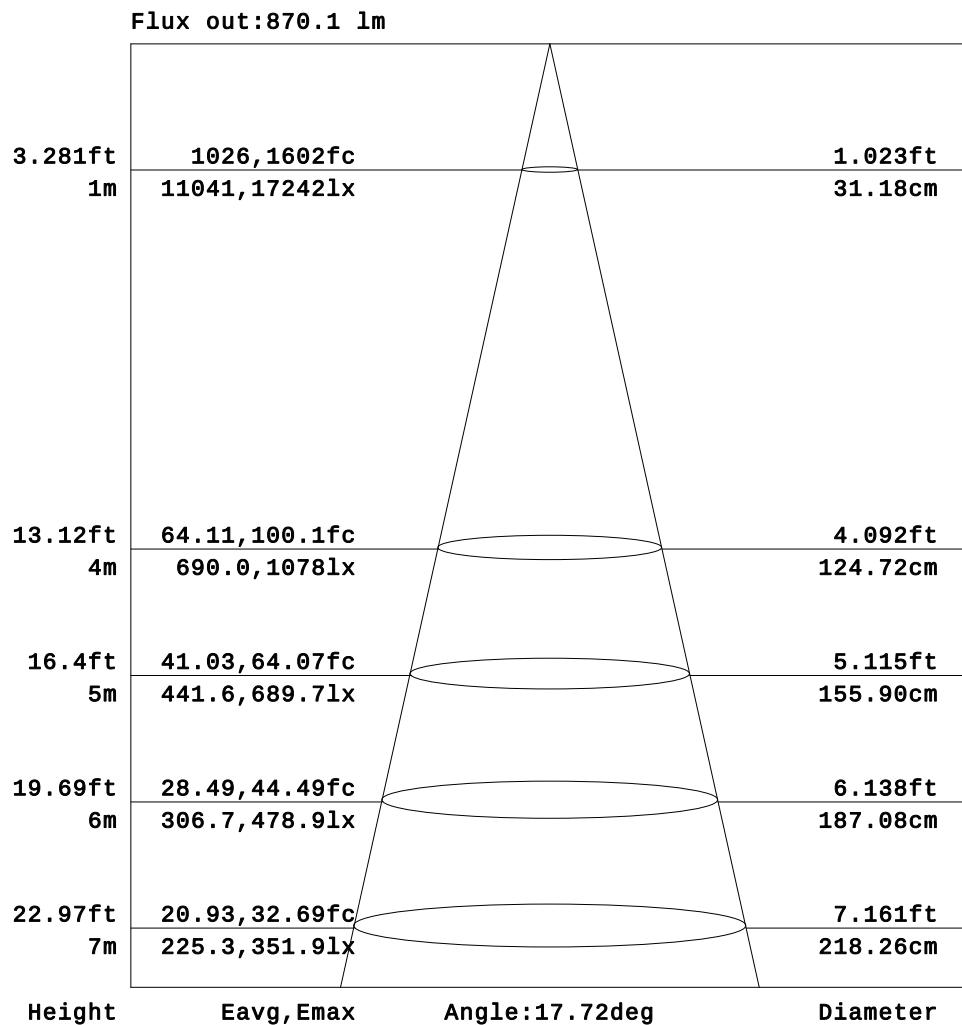


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-18

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

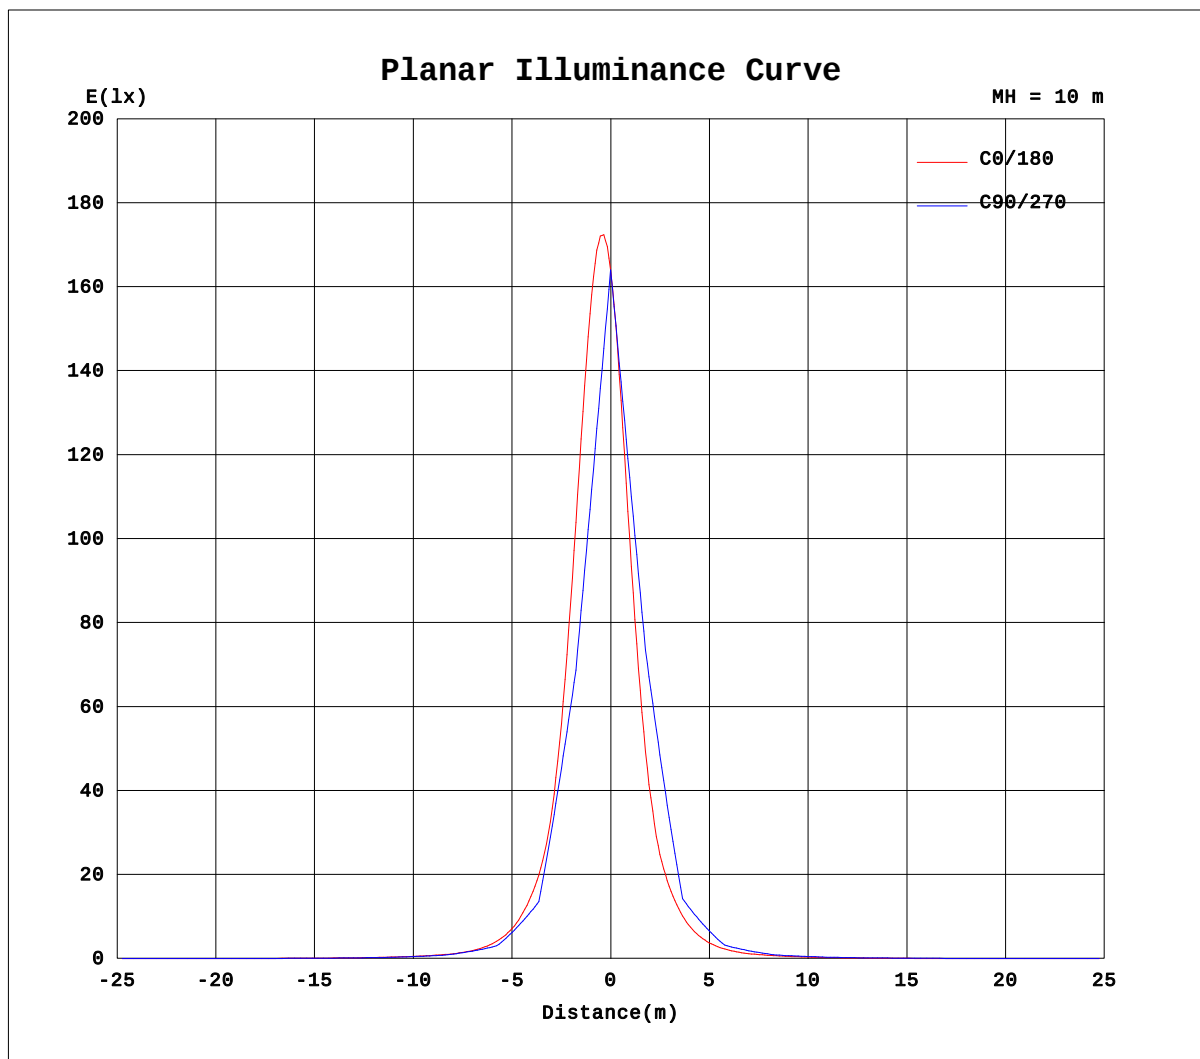

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 27.1DEG
Operators: QC1
Test Date: 2024-01-18

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 61%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:226.9V I:0.2358A P:32.85W PF:0.6140 Lamp Flux:2954.33x1 lm		
NAME: 8.01.017.0046 20°LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010086
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: ×10cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.23	0.41	0.55	0.67	0.81
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.27	0.61	0.94	1.19	1.46	1.67
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.32	0.57	0.84	1.15	1.47	1.84	2.32	2.67	2.94	3.26
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.30	0.85	1.33	1.94	2.52	2.94	3.46	4.04	4.34	4.70	4.97
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.34	0.80	1.59	2.25	2.90	3.66	4.33	4.97	5.71	6.34	6.85	7.29
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.23	1.02	1.91	2.91	3.64	4.46	5.39	6.21	7.06	7.93	8.74	9.41	9.78
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.49	1.33	2.31	3.43	4.49	5.55	6.82	8.18	9.58	11.0	12.3	13.5	14.3
-40	0.00	0.00	0.00	0.00	0.00	0.31	1.38	2.41	3.55	4.85	6.14	7.60	9.33	11.3	13.2	15.2	16.9	18.4	19.1
-35	0.00	0.00	0.00	0.00	0.00	0.24	1.38	2.61	3.85	5.26	6.91	8.90	11.3	14.1	17.2	21.0	25.4	29.7	32.8
-30	0.00	0.00	0.00	0.00	0.00	1.01	2.35	3.81	5.18	6.93	9.14	12.0	15.4	19.2	24.0	30.3	37.5	44.0	47.6
-25	0.00	0.00	0.00	0.00	0.00	0.75	2.11	3.67	5.25	7.15	9.72	13.0	17.0	23.3	32.9	47.6	66.9	88.1	104
-20	0.00	0.00	0.00	0.00	0.23	1.55	3.09	4.76	6.69	9.25	12.7	17.0	23.0	34.0	52.2	79.4	114	147	166
-15	0.00	0.00	0.00	0.00	0.00	1.18	2.70	4.36	6.30	8.83	12.4	17.0	23.8	37.1	62.5	108	178	294	424
-10	0.00	0.00	0.00	0.00	0.51	1.94	3.60	5.41	7.72	11.0	15.5	21.4	33.1	57.1	103	185	322	552	743
-5	0.00	0.00	0.00	0.00	0.05	1.46	3.11	4.83	6.95	9.92	14.1	19.6	29.6	50.9	94.4	179	347	701	1122
0	0.00	0.00	0.00	0.00	0.68	2.18	3.96	5.80	8.28	11.9	16.7	23.8	39.5	72.8	141	272	609	1208	1697
5	0.00	0.00	0.00	0.00	0.05	1.46	3.12	4.85	6.98	9.96	14.1	19.7	29.9	51.6	95.9	182	352	715	1147
10	0.00	0.00	0.00	0.00	0.52	1.94	3.63	5.46	7.78	11.1	15.7	21.8	33.9	58.9	107	193	336	590	794
15	0.00	0.00	0.00	0.00	0.00	1.19	2.74	4.41	6.33	8.86	12.5	17.1	24.2	38.2	64.9	113	186	312	452
20	0.00	0.00	0.00	0.00	0.25	1.58	3.15	4.80	6.68	9.22	12.7	17.1	23.3	35.1	54.5	83.9	121	155	175
25	0.00	0.00	0.00	0.00	0.00	0.79	2.18	3.70	5.21	7.07	9.60	12.9	17.0	23.6	33.9	49.8	70.7	93.1	109
30	0.00	0.00	0.00	0.00	0.00	1.05	2.46	3.79	5.08	6.74	8.88	11.7	15.2	19.2	24.5	31.4	39.2	46.2	50.1
35	0.00	0.00	0.00	0.00	0.00	0.27	1.42	2.61	3.76	5.08	6.63	8.57	10.9	13.9	17.2	21.5	26.3	31.0	34.2
40	0.00	0.00	0.00	0.00	0.00	0.38	1.35	2.37	3.41	4.59	5.79	7.20	8.96	11.0	13.2	15.3	17.3	18.9	19.6
45	0.00	0.00	0.00	0.00	0.00	0.00	0.49	1.28	2.20	3.23	4.17	5.19	6.45	7.87	9.40	11.0	12.5	13.8	14.7
50	0.00	0.00	0.00	0.00	0.00	0.00	0.18	0.92	1.80	2.64	3.31	4.14	5.05	5.94	6.93	7.93	8.85	9.60	10.0
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.30	0.74	1.44	2.01	2.69	3.46	4.13	4.88	5.72	6.43	7.03	7.51
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.26	0.71	1.20	1.87	2.43	2.88	3.50	4.13	4.49	4.91	5.18
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.27	0.49	0.80	1.12	1.44	1.90	2.43	2.77	3.08	3.42
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.33	0.74	1.06	1.26	1.55	1.74
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.28	0.48	0.59	0.71	0.85
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2024-01-18

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:226.9V I:0.2358A P:32.85W PF:0.6140 Lamp Flux:2954.33x1 lm		
NAME: 8.01.017.0046 20°LWW-WZB-W55-L6-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010086
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																		UNIT: ×10cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.82	0.71	0.62	0.54	0.39	0.27	0.18	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	1.56	1.34	1.19	0.97	0.67	0.47	0.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	3.28	3.01	2.79	2.52	2.11	1.79	1.51	1.09	0.78	0.59	0.35	0.05	0.00	0.00	0.00	0.00	0.00	0.00	
-60	4.80	4.48	4.23	3.76	3.25	2.92	2.45	1.85	1.40	1.02	0.46	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	7.34	6.97	6.50	5.90	5.18	4.54	3.93	3.22	2.62	2.09	1.40	0.70	0.33	0.00	0.00	0.00	0.00	0.00	
-50	9.64	9.09	8.34	7.48	6.57	5.71	4.86	4.06	3.44	2.65	1.76	1.04	0.34	0.00	0.00	0.00	0.00	0.00	
-45	14.4	13.9	12.8	11.5	10.00	8.53	7.13	5.85	4.82	3.88	2.87	1.99	1.15	0.32	0.00	0.00	0.00	0.00	
-40	19.0	17.9	16.2	14.3	12.2	10.2	8.34	6.76	5.46	4.28	3.24	2.28	1.25	0.17	0.00	0.00	0.00	0.00	
-35	33.4	31.5	27.6	23.1	18.6	15.0	12.1	9.59	7.50	5.82	4.45	3.33	2.12	0.93	0.01	0.00	0.00	0.00	
-30	46.9	42.4	35.5	27.9	21.8	17.3	13.7	10.7	8.10	6.18	4.73	3.47	2.00	0.73	0.00	0.00	0.00	0.00	
-25	107	96.2	76.8	56.1	38.6	26.6	19.1	14.5	10.8	8.04	5.98	4.41	2.89	1.46	0.21	0.00	0.00	0.00	
-20	162	136	101	68.9	44.5	29.1	20.3	15.2	11.2	8.08	5.89	4.15	2.58	1.15	0.00	0.00	0.00	0.00	
-15	457	359	225	136	80.4	47.0	28.8	19.4	14.2	10.2	7.31	5.21	3.49	1.94	0.57	0.00	0.00	0.00	
-10	699	469	264	154	85.0	47.4	28.1	19.0	13.8	9.80	6.92	4.83	3.14	1.56	0.16	0.00	0.00	0.00	
-5	1224	893	475	234	125	66.3	37.1	23.0	16.3	11.6	8.13	5.74	3.93	2.28	0.81	0.00	0.00	0.00	
0	1562	959	442	212	108	56.6	32.0	20.7	14.8	10.4	7.24	5.09	3.38	1.70	0.22	0.00	0.00	0.00	
5	1250	912	483	236	126	66.6	37.2	23.1	16.4	11.7	8.17	5.77	3.96	2.30	0.82	0.00	0.00	0.00	
10	746	499	273	157	86.0	47.8	28.8	19.2	14.0	9.89	6.99	4.89	3.20	1.60	0.15	0.00	0.00	0.00	
15	487	382	236	141	82.2	47.9	29.5	19.9	14.5	10.5	7.47	5.30	3.56	1.99	0.60	0.00	0.00	0.00	
20	170	144	106	71.8	46.2	30.3	21.2	15.8	11.6	8.39	6.09	4.24	2.64	1.20	0.00	0.00	0.00	0.00	
25	113	102	80.8	58.8	40.5	28.1	20.3	15.3	11.5	8.50	6.27	4.54	2.96	1.50	0.23	0.00	0.00	0.00	
30	49.4	44.5	37.3	29.8	23.4	18.7	14.8	11.6	8.76	6.66	5.02	3.55	2.07	0.75	0.00	0.00	0.00	0.00	
35	35.0	33.0	29.1	24.5	19.9	16.3	13.2	10.5	8.24	6.36	4.82	3.55	2.25	0.96	0.02	0.00	0.00	0.00	
40	19.6	18.6	17.1	15.4	13.3	11.3	9.31	7.58	6.10	4.75	3.59	2.53	1.36	0.19	0.00	0.00	0.00	0.00	
45	14.9	14.4	13.5	12.3	10.9	9.47	8.02	6.65	5.49	4.39	3.25	2.28	1.37	0.34	0.00	0.00	0.00	0.00	
50	9.92	9.51	8.91	8.15	7.31	6.47	5.58	4.74	4.02	3.08	2.10	1.29	0.55	0.00	0.00	0.00	0.00	0.00	
55	7.57	7.30	6.95	6.42	5.78	5.19	4.54	3.79	3.16	2.53	1.69	0.93	0.45	0.00	0.00	0.00	0.00	0.00	
60	5.05	4.83	4.61	4.17	3.75	3.43	2.89	2.29	1.86	1.31	0.64	0.04	0.00	0.00	0.00	0.00	0.00	0.00	
65	3.42	3.22	3.10	2.85	2.46	2.20	1.90	1.42	1.01	0.78	0.46	0.13	0.00	0.00	0.00	0.00	0.00	0.00	
70	1.63	1.50	1.45	1.20	0.92	0.78	0.55	0.18	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.85	0.77	0.74	0.66	0.51	0.41	0.34	0.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-18

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks: