

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		5832.6 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	39.7V x 39.8H
	At 50% of Imax	18.8V x 18.4H
	At 90% of Imax	5.1V x 6.7H
Beam Flux	Total	998.9 lumens per klm.
	To 10% of Imax	712.7 lumens per klm.
	To 50% of Imax	304.8 lumens per klm.
	To 90% of Imax	29.0 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:24.0DEG
Operators:QC1
Test Date:2024-03-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:40%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.7V I:0.2021A P:26.82W PF:0.6039 Lamp Flux:1250.39x1 lm		
NAME: 8.01.017.0054 20°LWW-WZB-W55-L6-RDM (7针)	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240100034
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

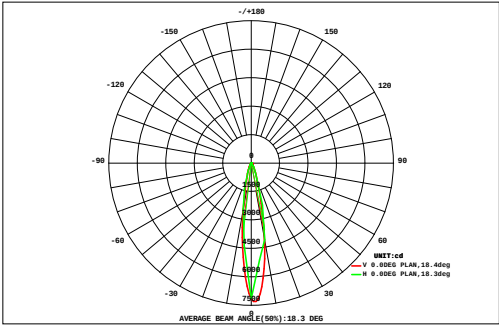

DATA OF LAMP		Eff:46.63lm/W	
LWW-WZB-W55-L6-RDM (7针)		Imax(cd)	7293
NOMINAL POWER(W)	26	AVAILABILITY(%)	73.0
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	913.3
NOMINAL FLUX(lm)	1250.39	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1250
TEST VOLTAGE(V)	219.7	θ @50%(H,V)	18,19DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.27	0.34	0.43	0.54	0.66	0.80	0.93	1.04	1.13	1.16	1.15	1.09	0.99	0.87	0.74	0.62	0.50	0.40	13.7	0.00
27	0.27	0.34	0.43	0.54	0.66	0.80	0.93	1.04	1.13	1.16	1.15	1.09	0.99	0.87	0.74	0.62	0.50	0.40	13.7	0.00
24	0.30	0.40	0.53	0.71	0.91	1.14	1.38	1.61	1.81	1.92	1.94	1.85	1.69	1.48	1.25	1.03	0.82	0.64	21.4	2.06
21	0.41	0.56	0.76	0.99	1.27	1.56	1.87	2.14	2.34	2.42	2.36	2.19	1.95	1.67	1.38	1.11	0.87	0.67	26.5	12.9
18	0.52	0.73	1.00	1.30	1.64	2.00	2.38	2.68	2.88	2.91	2.77	2.53	2.20	1.84	1.49	1.17	0.90	0.68	31.6	20.2
15	0.46	0.65	0.90	1.26	1.73	2.43	3.55	5.10	6.76	7.99	8.22	7.37	5.80	4.17	2.86	2.04	1.51	1.10	63.9	55.9
12	0.55	0.79	1.11	1.56	2.19	3.24	4.91	7.12	9.35	10.8	10.7	9.23	6.99	4.83	3.24	2.29	1.66	1.21	81.7	74.8
9	0.81	1.15	1.61	2.25	3.19	4.94	7.49	10.5	13.0	13.8	12.7	9.88	6.86	4.38	2.90	2.06	1.46	1.05	100	93.4
6	0.68	0.97	1.38	1.95	2.81	4.33	6.87	10.2	13.6	15.8	15.8	13.4	9.96	6.67	4.17	2.66	1.84	1.30	114	108
3	0.51	0.75	1.08	1.56	2.29	3.51	5.97	9.65	13.9	17.7	19.0	17.2	13.4	9.20	5.57	3.33	2.26	1.57	128	123
0	0.85	1.21	1.75	2.59	4.04	6.88	11.2	15.9	20.1	21.5	19.2	14.8	10.2	6.18	3.50	2.27	1.57	1.11	145	139
-3	0.81	1.15	1.66	2.44	3.79	6.41	10.4	14.8	18.6	20.0	18.0	14.0	9.72	5.95	3.43	2.24	1.55	1.10	136	130
-6	0.43	0.61	0.84	1.14	1.51	1.94	2.86	4.64	6.94	9.40	10.8	10.3	8.37	6.13	4.09	2.62	1.83	1.31	75.7	67.7
-9	0.51	0.70	0.96	1.28	1.67	2.07	2.70	3.77	4.96	6.01	6.41	5.83	4.67	3.55	2.63	1.86	1.35	0.99	51.9	43.2
-12	0.61	0.83	1.12	1.50	1.97	2.44	2.89	3.28	3.31	2.71	1.81	1.12	0.73	0.68	0.96	1.00	0.81	0.63	28.4	17.6
-15	0.31	0.42	0.56	0.73	0.96	1.25	1.58	2.06	2.66	3.22	3.50	3.36	2.86	2.23	1.71	1.33	1.02	0.77	30.5	19.4
-18	0.24	0.31	0.40	0.50	0.62	0.75	0.84	0.98	1.24	1.61	1.96	2.09	1.95	1.62	1.28	1.02	0.81	0.63	18.8	5.83
-21	0.29	0.36	0.45	0.55	0.65	0.72	0.74	0.65	0.47	0.33	0.27	0.27	0.32	0.40	0.43	0.39	0.34	0.29	7.91	0.00
-24	0.22	0.27	0.33	0.39	0.46	0.51	0.54	0.51	0.54	0.58	0.59	0.58	0.54	0.49	0.44	0.40	0.35	0.30	8.03	0.00
-27	0.27	0.34	0.43	0.54	0.66	0.80	0.93	1.04	1.13	1.16	1.15	1.09	0.99	0.87	0.74	0.62	0.50	0.40	13.7	0.00
-27 -24 -21 -18 -15 -12 -9 -6 HORIZONTAL(DEG) 6 9 12 15 18 21 24 27																				
Φ t	8.78	12.2	16.8	23.2	32.4	46.9	69.1	96.7	124	140	137	117	89.2	62.3	42.1	29.4	21.5	15.8	1084	---
Φ a	0.00	0.00	1.81	7.90	20.1	38.4	61.7	90.4	119	135	133	113	83.7	54.2	31.8	18.6	4.98	0.20	---	913


one-half-peak spread: U:7.2,D:11.8 , L:9.7,R:8.9 NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:24.0DEG
Operators:QC1
Test Date:2024-03-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:40%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.7V I:0.2021A P:26.82W PF:0.6039 Lamp Flux:1250.39x1 lm		
NAME: 8.01.017.0054 20°LWW-WZB-W55-L6-RDM (7针)	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240100034
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

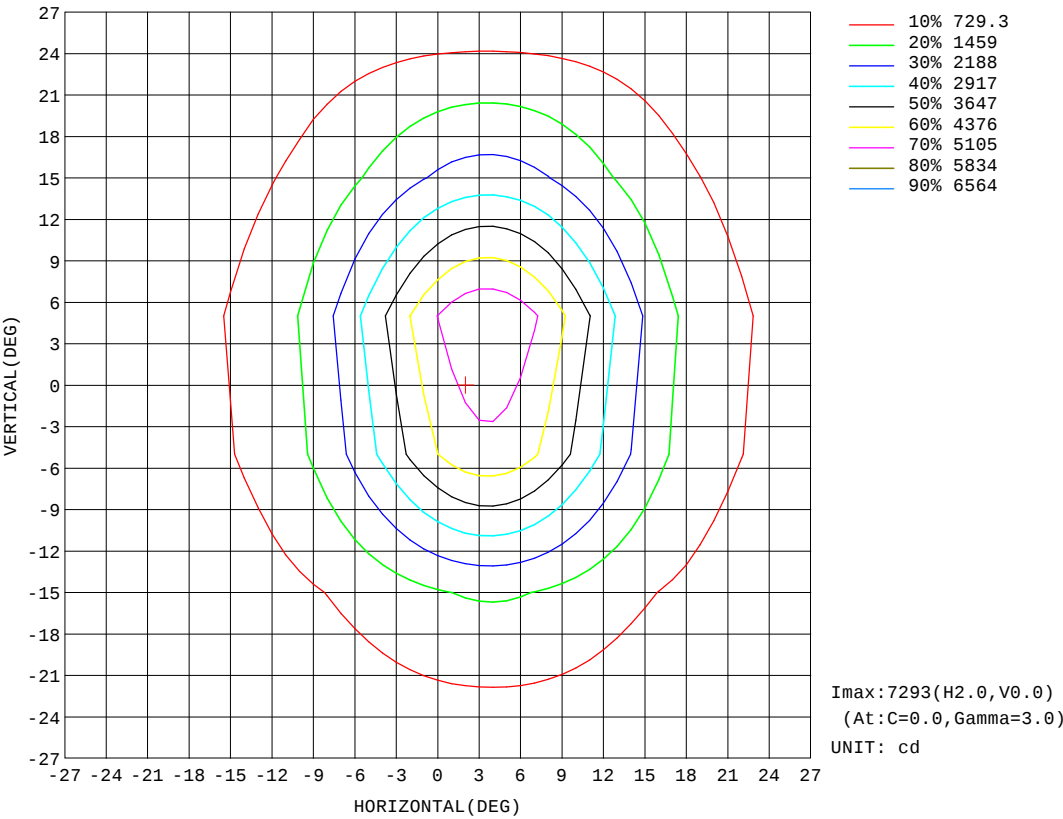


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:24.0DEG
Operators:QC1
Test Date:2024-03-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:40%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:219.7V I:0.2021A P:26.82W PF:0.6039 Lamp Flux:1250.39x1 lm		
NAME: 8.01.017.0054 20°LWW-WZB-W55-L6-RDM (7针)	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240100034
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

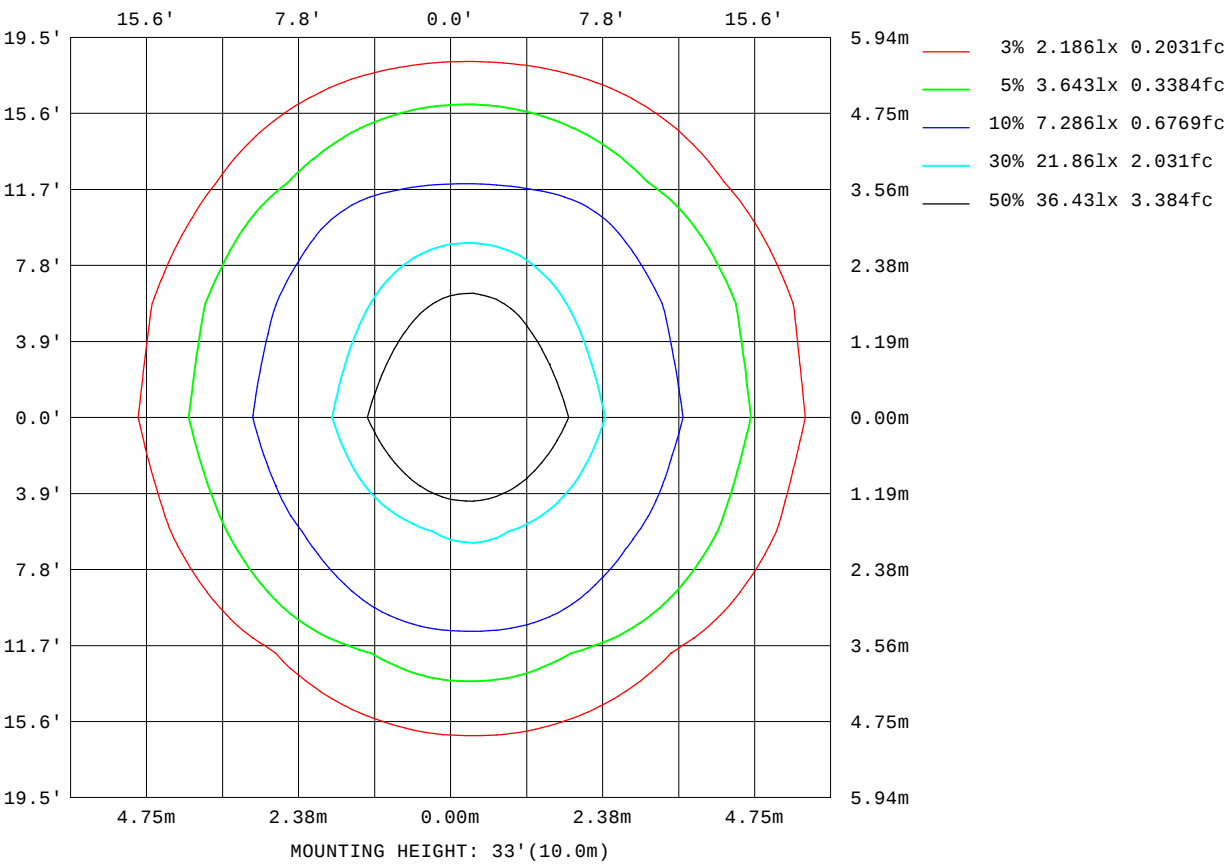


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:24.0DEG
Operators:QC1
Test Date:2024-03-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:40%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.7V I:0.2021A P:26.82W PF:0.6039 Lamp Flux:1250.39x1 lm		
NAME: 8.01.017.0054 20°LWW-WZB-W55-L6-RDM (7针)	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240100034
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

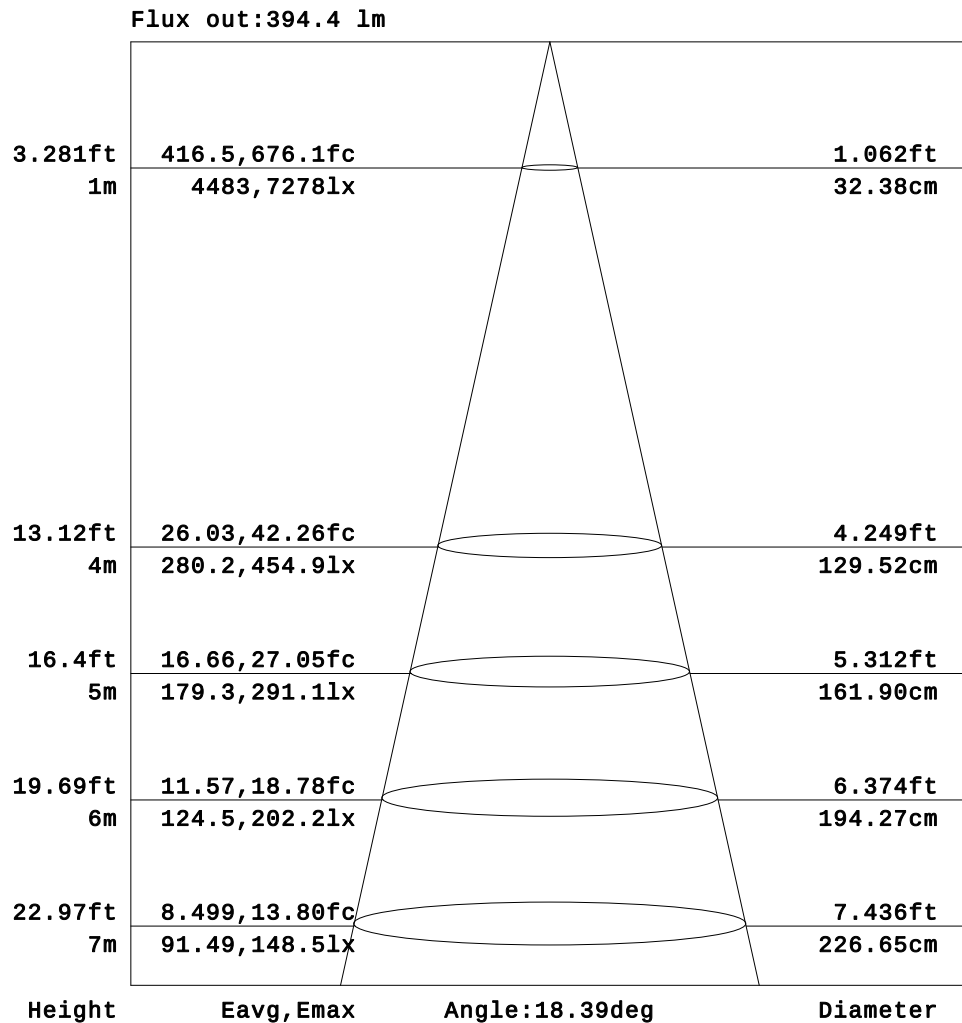


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:24.0DEG
Operators:QC1
Test Date:2024-03-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:40%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

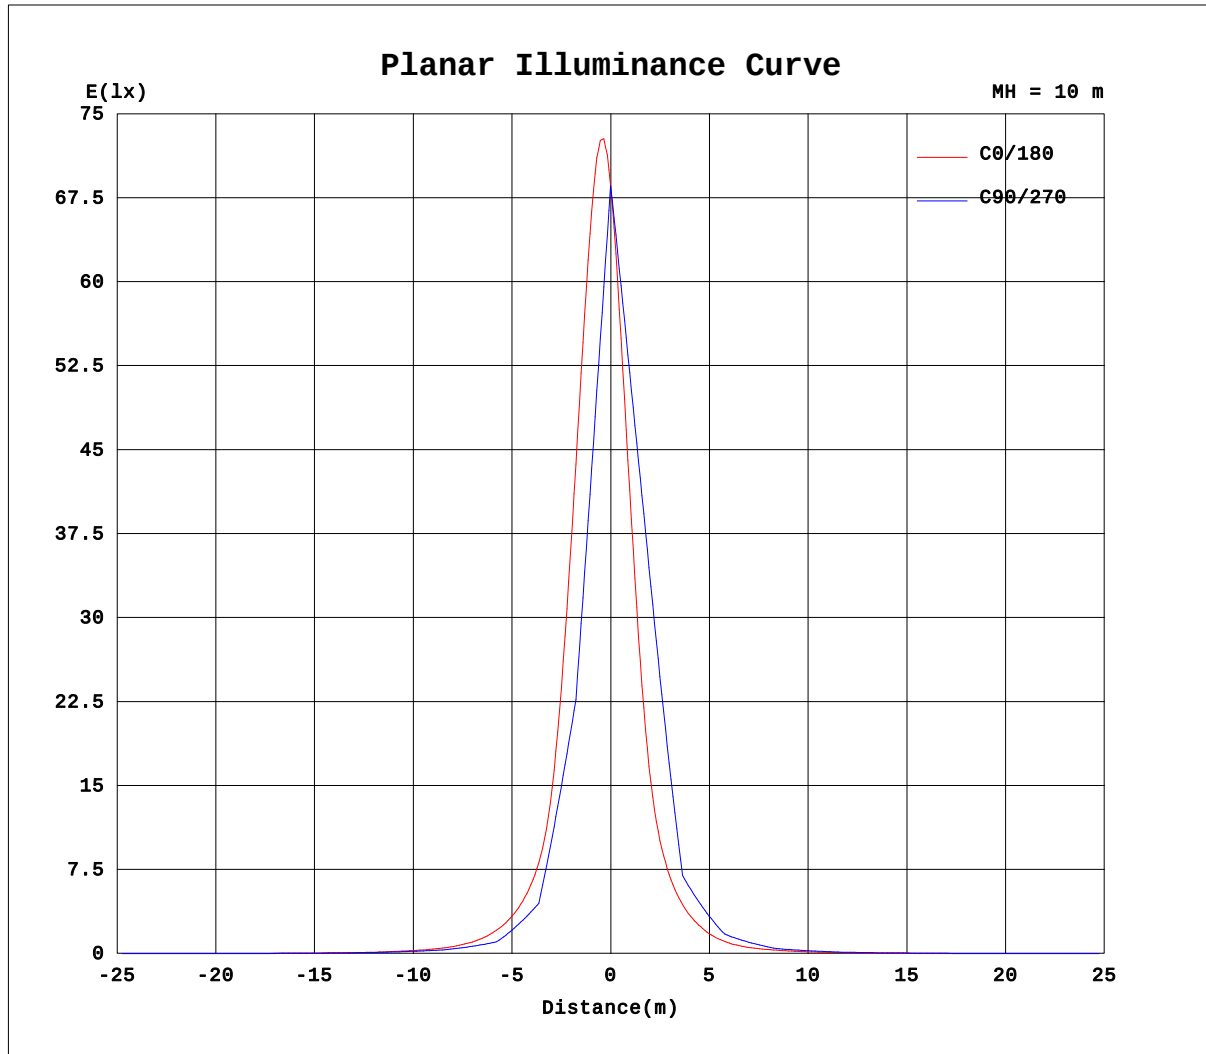

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:24.0DEG
Operators:QC1
Test Date:2024-03-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:40%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.7V I:0.2021A P:26.82W PF:0.6039 Lamp Flux:1250.39x1 lm		
NAME: 8.01.017.0054 20°LWW-WZB-W55-L6-RDM (7针)	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240100034
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1																	UNIT: cd			
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.21	1.24	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.37	2.78	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	1.49	2.66	4.37	5.90	7.17	8.76	11.2	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.39	3.87	6.43	9.79	12.9	15.4	18.3	20.3	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.85	3.81	5.93	9.69	12.8	16.5	20.2	23.7	27.4	30.6	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.99	5.34	9.18	13.7	18.0	21.7	25.9	30.4	35.0	39.3	42.2	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.57	3.52	8.60	13.5	18.6	24.2	29.8	36.0	42.1	48.2	54.6	59.4	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.36	9.65	15.9	21.7	28.0	34.9	42.6	51.0	58.7	66.7	74.2	79.0	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.45	4.60	11.0	18.0	25.4	33.8	43.5	53.7	65.0	77.9	92.3	107	119	
-30	0.00	0.00	0.00	0.00	0.00	0.00	3.70	10.8	17.8	25.9	35.5	47.2	60.2	73.4	89.1	108	130	151	165	
-25	0.00	0.00	0.00	0.00	0.00	0.00	2.76	10.6	18.4	27.5	39.0	52.9	69.3	91.6	126	173	233	297	348	
-20	0.00	0.00	0.00	0.00	0.00	0.00	8.09	16.6	25.9	37.6	53.2	71.1	94.0	134	197	282	387	487	550	
-15	0.00	0.00	0.00	0.00	0.00	0.00	5.69	14.6	24.3	36.4	52.7	72.8	102	158	253	399	622	971	1398	
-10	0.00	0.00	0.00	0.00	0.00	1.52	10.4	20.0	31.6	47.2	67.4	94.2	149	249	411	673	1096	1812	2462	
-5	0.00	0.00	0.00	0.00	0.00	0.00	7.77	17.0	27.8	42.4	62.1	87.8	136	233	405	703	1333	2717	4374	
0	0.00	0.00	0.00	0.00	0.00	2.90	12.6	22.0	34.5	52.4	75.2	111	188	337	593	1107	2487	4985	7140	
5	0.00	0.00	0.00	0.00	0.00	0.00	8.00	17.2	28.0	42.9	63.2	90.4	143	250	439	771	1489	3153	5120	
10	0.00	0.00	0.00	0.00	0.00	1.80	11.0	20.2	32.1	48.7	70.5	102	169	294	501	851	1598	2950	4091	
15	0.00	0.00	0.00	0.00	0.00	0.00	5.92	14.7	24.6	37.6	55.6	78.5	116	191	322	529	871	1533	2291	
20	0.00	0.00	0.00	0.00	0.00	0.00	8.03	16.7	26.5	39.8	57.5	79.3	113	178	287	431	599	759	850	
25	0.00	0.00	0.00	0.00	0.00	0.00	2.72	10.8	19.0	28.6	41.6	57.9	78.9	114	171	257	360	468	547	
30	0.00	0.00	0.00	0.00	0.00	0.00	3.73	11.5	18.3	26.9	37.9	51.6	68.0	88.6	119	162	209	249	272	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.41	5.14	11.4	18.1	26.1	35.9	47.7	61.9	80.1	106	135	164	184	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.94	9.49	15.4	21.6	29.2	38.1	48.2	60.0	72.7	85.6	97.0	103	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.91	3.63	8.17	13.3	18.7	25.2	32.4	40.7	50.1	59.5	68.8	75.2	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.80	5.13	9.09	13.1	17.8	22.9	28.7	34.7	41.1	46.6	49.7	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.68	3.80	5.71	9.59	13.5	17.9	22.9	27.6	32.2	35.4	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.25	4.49	7.42	11.0	14.9	17.9	20.7	22.5	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	1.63	3.14	4.71	6.75	8.62	11.0	12.8	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.28	2.90	3.92	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.27	1.15	1.83	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:24.0DEG
Operators:QC1
Test Date:2024-03-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:40%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.7V I:0.2021A P:26.82W PF:0.6039 Lamp Flux:1250.39x1 lm		
NAME: 8.01.017.0054 20°LWW-WZB-W55-L6-RDM (7针)	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240100034
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	
UNIT: cd																	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	1.28	0.67	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	2.13	0.91	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	11.4	9.96	8.54	7.26	5.65	4.43	3.35	1.89	0.50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	19.7	17.9	16.0	13.3	10.2	8.03	5.63	2.54	0.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	31.3	29.7	26.9	23.5	19.7	16.3	13.2	9.70	6.57	4.30	2.06	0.00	0.00	0.00	0.00	0.00	0.00
-50	42.0	39.4	35.2	30.7	26.3	22.1	18.1	14.1	10.9	6.87	2.18	0.00	0.00	0.00	0.00	0.00	0.00
-45	61.0	58.8	53.7	47.5	41.1	34.7	28.6	22.9	17.9	13.2	8.04	3.23	0.72	0.00	0.00	0.00	0.00
-40	79.1	74.6	67.3	59.2	50.8	42.4	34.5	27.5	21.4	15.5	9.72	4.43	0.00	0.00	0.00	0.00	0.00
-35	123	118	107	91.6	76.9	63.6	51.9	41.2	31.5	23.4	16.3	10.0	3.88	0.00	0.00	0.00	0.00
-30	166	154	134	112	92.0	75.3	60.4	46.9	34.8	25.4	17.8	10.7	3.34	0.00	0.00	0.00	0.00
-25	360	331	276	215	161	119	87.8	66.3	49.0	35.1	24.4	16.0	7.87	0.60	0.00	0.00	0.00
-20	542	469	369	272	193	134	96.0	71.1	51.4	35.5	23.9	14.8	6.04	0.00	0.00	0.00	0.00
-15	1530	1210	786	520	338	217	142	96.2	68.2	47.1	31.5	20.3	10.9	2.41	0.00	0.00	0.00
-10	2348	1587	954	604	376	230	145	96.2	67.1	44.9	29.3	18.1	8.77	0.23	0.00	0.00	0.00
-5	4834	3510	1888	924	536	321	193	120	81.6	55.5	36.2	23.1	13.2	4.12	0.00	0.00	0.00
0	6538	4068	1845	871	497	292	174	108	73.5	48.9	31.4	19.6	10.1	1.09	0.00	0.00	0.00
5	5641	4066	2133	1006	576	343	203	125	84.0	56.8	36.8	23.4	13.6	4.48	0.00	0.00	0.00
10	3825	2444	1257	727	438	261	159	103	70.8	47.0	30.3	18.8	9.60	0.80	0.00	0.00	0.00
15	2483	1893	1129	669	420	263	162	106	74.1	50.6	33.2	21.2	11.8	3.17	0.00	0.00	0.00
20	821	699	538	385	260	170	112	80.6	57.3	38.7	25.7	15.6	6.90	0.00	0.00	0.00	0.00
25	560	506	412	311	221	153	106	77.2	56.2	39.4	26.8	17.2	8.67	1.00	0.00	0.00	0.00
30	269	242	203	160	122	94.2	73.5	55.9	40.8	28.9	19.9	11.9	3.84	0.00	0.00	0.00	0.00
35	188	177	155	129	103	80.8	64.3	50.0	37.7	27.4	18.9	11.9	4.70	0.00	0.00	0.00	0.00
40	103	96.4	86.6	75.7	64.3	53.5	43.0	33.7	25.8	18.6	12.2	6.26	0.01	0.00	0.00	0.00	0.00
45	76.7	74.0	67.6	60.0	51.7	43.5	35.9	28.5	22.3	16.4	10.3	4.90	1.20	0.00	0.00	0.00	0.00
50	49.5	47.1	42.7	37.7	32.5	27.4	22.6	18.1	14.2	9.30	3.89	0.00	0.00	0.00	0.00	0.00	0.00
55	36.2	34.8	32.2	28.6	24.6	20.8	17.1	13.1	9.66	6.13	2.98	0.53	0.00	0.00	0.00	0.00	0.00
60	22.1	20.7	19.1	16.4	13.6	11.2	8.48	5.15	2.49	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	13.2	12.3	11.0	9.21	7.31	6.10	4.83	3.20	1.76	0.44	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	3.68	2.88	1.81	0.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	1.95	1.62	1.14	0.45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:24.0DEG
Operators:QC1
Test Date:2024-03-20

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:40%
Test Distance:8.300m [K=1.0000]
Remarks: