

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	3427.6 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	50.6V x 49.1H
	At 50% of Imax	24.4V x 23.1H
	At 90% of Imax	12.9V x 8.8H

Beam Flux	Total	999.9 lumens per klm.
	To 10% of Imax	727.3 lumens per klm.
	To 50% of Imax	362.3 lumens per klm.
	To 90% of Imax	83.4 lumens per klm.

Upward LOR	0.0 %
Downward LOR	100.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-28

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:277.2V I:0.2538A P:42.20W PF:0.5999 Lamp Flux:1777.13x1 lm		
NAME: 8.03.007.0153 30°SP-DKP-F170-24P-RDM-AL	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120059
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

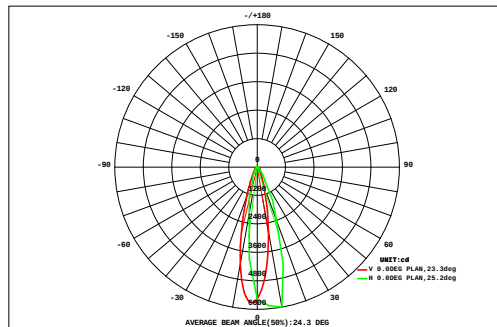

DATA OF LAMP		Eff:42.11lm/W	
MODEL	DKP-F170-24P-RDM-AL	Imax(cd)	6091
NOMINAL POWER(W)	42	AVAILABILITY(%)	73.7
RATED VOLTAGE(V)	278	Avai. FLUX(lm)	1309
NOMINAL FLUX(lm)	1777.13	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1777
TEST VOLTAGE(V)	277.2	θ @50%(H,V)	23,24DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.37	0.50	0.65	0.82	1.01	1.21	1.41	1.60	1.72	1.76	1.70	1.56	1.37	1.17	0.98	0.80	0.64	0.50	19.8	0.00
45	0.54	0.72	0.92	1.15	1.41	1.69	1.95	2.15	2.24	2.19	2.02	1.76	1.49	1.22	0.99	0.79	0.62	0.47	24.3	0.00
40	0.49	0.68	0.92	1.23	1.64	2.20	2.89	3.63	4.19	4.35	4.04	3.42	2.71	2.07	1.56	1.17	0.89	0.67	38.7	3.27
35	0.72	1.00	1.36	1.86	2.57	3.52	4.60	5.54	5.95	5.64	4.77	3.71	2.76	2.01	1.47	1.08	0.80	0.59	49.9	22.7
30	0.60	0.85	1.22	1.80	2.75	4.44	7.23	11.0	14.2	15.0	12.9	9.25	6.02	3.83	2.49	1.69	1.18	0.84	97.3	78.8
25	0.90	1.30	1.95	3.09	5.15	8.77	14.1	19.6	22.0	19.5	14.0	8.74	5.22	3.19	2.06	1.40	0.98	0.69	133	116
20	0.67	0.98	1.45	2.25	3.84	7.31	14.4	25.3	36.0	39.4	32.8	21.2	11.7	6.28	3.55	2.18	1.42	0.97	212	196
15	1.00	1.52	2.43	4.25	8.22	16.9	31.2	46.7	53.8	46.4	30.2	15.9	7.84	4.15	2.45	1.56	1.06	0.74	276	262
10	0.68	0.98	1.45	2.22	3.68	6.78	13.9	26.5	39.8	45.2	38.6	25.4	13.8	7.06	3.86	2.31	1.49	1.00	235	220
5	0.98	1.48	2.38	4.12	7.78	15.3	27.8	40.4	43.9	35.5	22.3	11.8	5.96	3.39	2.13	1.44	1.00	0.70	228	213
0	0.62	0.88	1.23	1.74	2.52	3.88	6.80	12.7	20.2	24.2	21.8	15.5	9.30	5.25	3.12	1.97	1.32	0.92	134	117
-5	0.84	1.22	1.78	2.67	4.14	6.31	8.76	10.1	9.34	6.98	4.73	3.29	2.57	2.03	1.53	1.13	0.83	0.61	68.9	48.4
-10	0.52	0.72	0.97	1.29	1.71	2.35	3.33	4.86	6.65	7.73	7.37	5.91	4.23	2.92	2.04	1.44	1.04	0.76	55.8	33.2
-15	0.66	0.89	1.18	1.54	2.00	2.41	2.62	2.43	1.98	1.64	1.46	1.38	1.35	1.22	1.03	0.84	0.65	0.50	25.8	0.00
-20	0.41	0.56	0.73	0.93	1.15	1.45	1.78	2.15	2.47	2.62	2.54	2.28	1.92	1.56	1.24	0.97	0.76	0.58	26.1	0.00
-25	0.49	0.63	0.79	0.96	1.12	1.25	1.33	1.34	1.28	1.19	1.11	1.02	0.93	0.82	0.71	0.59	0.48	0.37	16.4	0.00
-30	0.30	0.40	0.51	0.63	0.75	0.88	1.01	1.12	1.21	1.24	1.21	1.14	1.03	0.90	0.76	0.64	0.52	0.41	14.6	0.00
-35	0.32	0.41	0.50	0.58	0.65	0.72	0.76	0.78	0.78	0.76	0.72	0.67	0.61	0.55	0.48	0.40	0.32	0.25	10.2	0.00
-40	0.32	0.41	0.50	0.58	0.65	0.72	0.76	0.78	0.78	0.76	0.72	0.67	0.61	0.55	0.48	0.40	0.32	0.25	10.2	0.00
-45	0.32	0.41	0.50	0.58	0.65	0.72	0.76	0.78	0.78	0.76	0.72	0.67	0.61	0.55	0.48	0.40	0.32	0.25	10.2	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
Φ t	11.1	15.7	22.4	33.1	52.1	87.4	146	218	268	261	204	134	80.9	49.6	32.4	22.4	16.0	11.5	1666	---
Φ a	0.00	0.00	0.00	4.84	24.9	65.6	127	201	252	247	188	116	60.3	21.8	2.38	0.00	0.00	0.00	---	1309

one-half-peak spread: U:16.8,D:7.8 , L:11.6,R:11.7


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-12-28

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:277.2V I:0.2538A P:42.20W PF:0.5999 Lamp Flux:1777.13x1 lm		
NAME: 8.03.007.0153 30°SP-DKP-F170-24P-RDM-AL	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120059
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

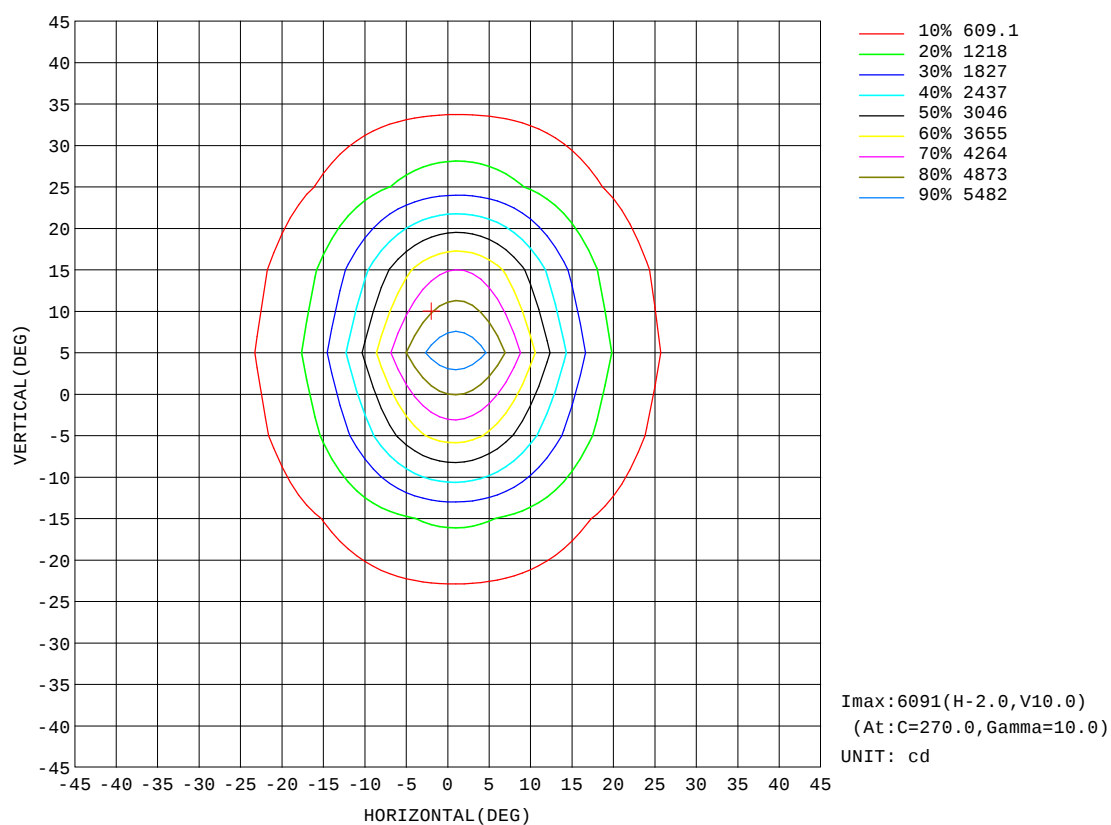


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-28

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:277.2V I:0.2538A P:42.20W PF:0.5999 Lamp Flux:1777.13x1 lm		
NAME: 8.03.007.0153 30°SP-DKP-F170-24P-RDM-AL	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120059
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

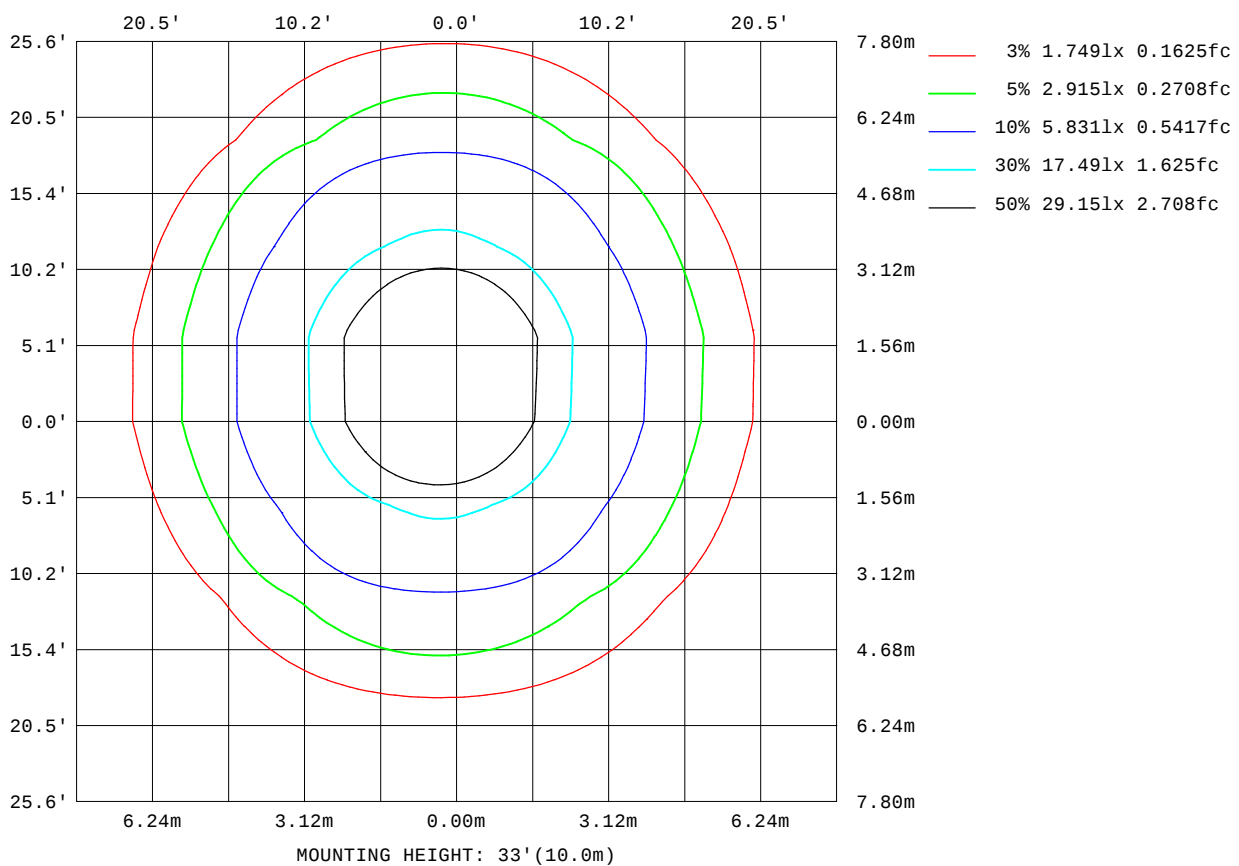


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-28

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:277.2V I:0.2538A P:42.20W PF:0.5999 Lamp Flux:1777.13x1 lm		
NAME: 8.03.007.0153 30°SP-DKP-F170-24P-RDM-AL	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120059
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

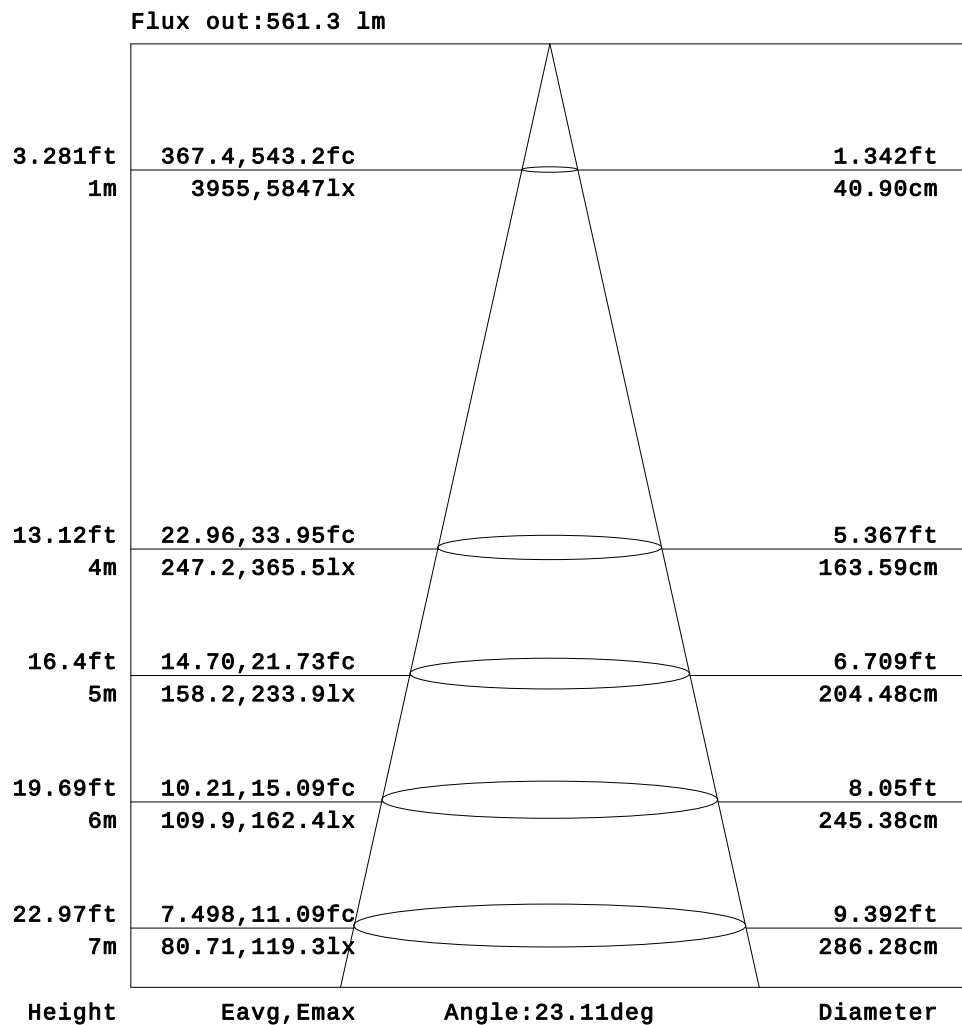


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-28

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

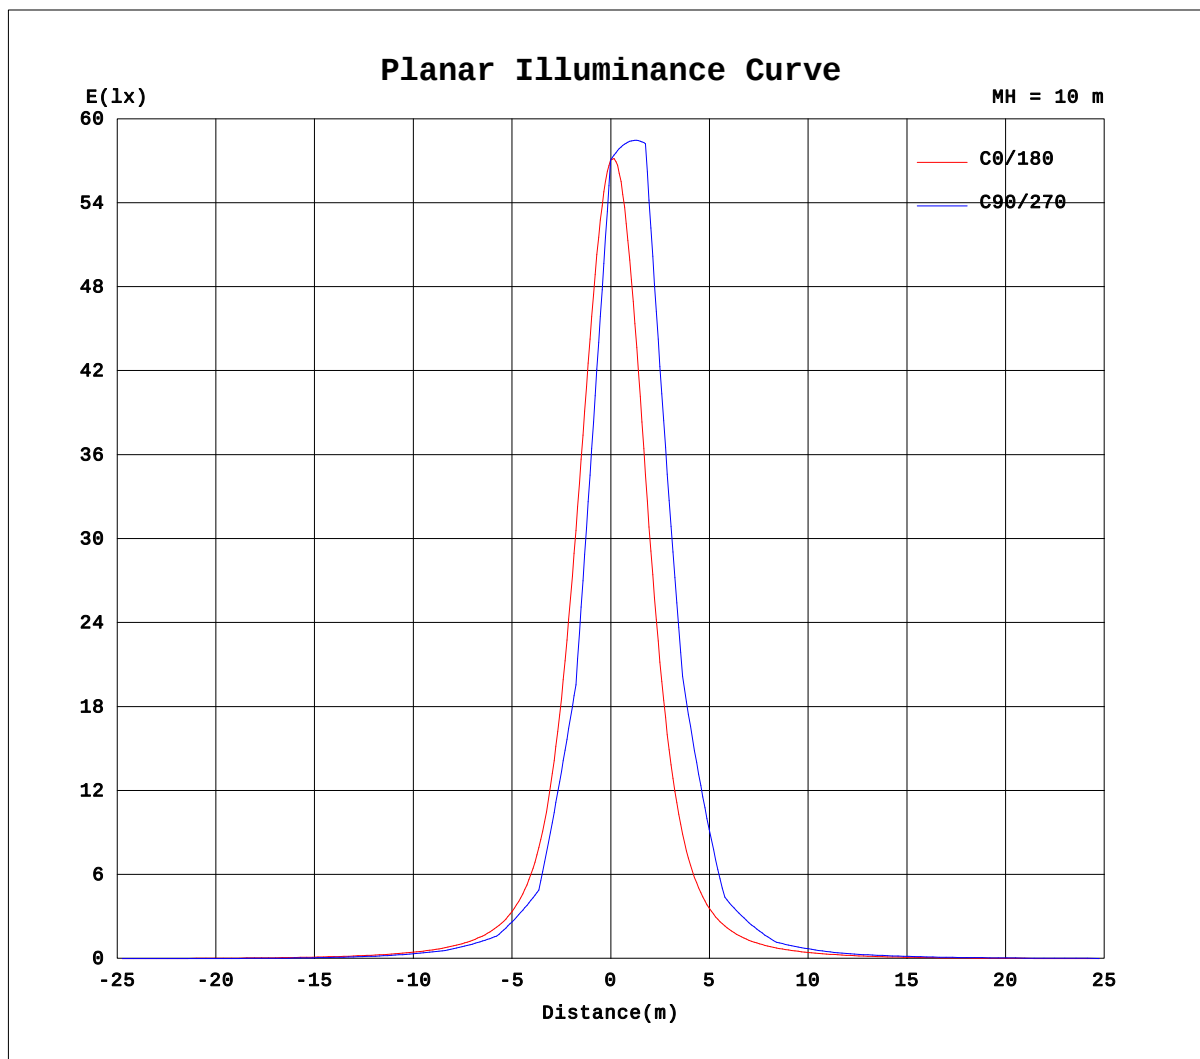

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-28

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.2V I:0.2538A P:42.20W PF:0.5999 Lamp Flux:1777.13x1 lm																	
NAME: 8.03.007.0153 30°SP-DKP-F170-24P-RDM-AL									TYPE:LED			WEIGHT:					
DIM.:									SPEC.:			SERIAL No.:2023120059					
MFR.: TPK OPTOELECTRONIC TECH CO., LTD									SUR.:			PROTECTION ANGLE:					

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.25	3.75	6.04	7.87	9.55	10.7	11.3	11.6	11.9	12.3	12.5
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.44	5.57	10.4	14.3	17.8	20.6	22.2	23.0	23.5	24.3	24.9	24.9
-55	0.00	0.00	0.00	0.00	0.00	0.00	1.62	5.35	10.9	17.8	24.2	29.3	33.6	37.0	39.8	42.1	44.2	46.0	46.9
-50	0.00	0.00	0.00	0.00	0.00	0.60	7.58	15.7	24.6	33.1	40.4	46.0	50.9	55.3	59.4	63.2	66.5	68.4	68.7
-45	0.00	0.00	0.00	0.00	0.00	1.51	7.95	17.8	28.1	38.0	47.6	56.6	65.0	73.1	80.7	87.6	93.7	98.1	100
-40	0.00	0.00	0.00	0.00	0.21	8.56	19.8	32.3	43.5	54.4	65.8	77.4	88.9	100	110	120	127	131	131
-35	0.00	0.00	0.00	0.00	0.05	6.06	17.6	31.0	44.2	57.5	71.9	87.4	104	121	139	157	174	186	191
-30	0.00	0.00	0.00	0.00	4.95	16.6	31.4	45.6	60.5	77.6	96.5	117	139	164	190	216	236	248	248
-25	0.00	0.00	0.00	0.00	1.22	11.5	26.3	41.7	58.1	76.7	98.1	123	153	189	237	292	351	399	421
-20	0.00	0.00	0.00	0.00	8.82	23.4	39.7	57.1	77.2	101	129	164	209	268	349	439	527	584	586
-15	0.00	0.00	0.00	0.00	3.61	16.2	33.0	50.5	70.7	95.1	124	163	217	297	425	621	890	1168	1318
-10	0.00	0.00	0.00	0.77	12.3	28.9	46.8	67.3	92.3	123	164	223	313	464	718	1110	1600	1980	2015
-5	0.00	0.00	0.00	0.00	5.75	19.9	37.9	57.2	80.8	110	147	201	286	435	721	1275	2199	3284	3872
0	0.00	0.00	0.00	1.92	14.7	32.4	51.5	74.1	102	138	189	269	415	704	1306	2469	4152	5492	5559
5	0.00	0.00	0.00	0.00	6.55	21.2	39.6	59.6	84.4	115	156	216	317	505	895	1718	3154	4874	5873
10	0.00	0.00	0.00	1.69	14.4	32.0	51.0	73.4	101	137	189	269	413	703	1334	2555	4279	5760	5985
15	0.00	0.00	0.00	0.00	5.85	20.0	37.9	57.3	80.7	109	147	201	285	438	738	1338	2344	3520	4232
20	0.00	0.00	0.00	0.87	12.7	29.5	47.5	68.0	93.1	124	164	223	319	481	770	1241	1850	2335	2393
25	0.00	0.00	0.00	0.00	3.77	16.4	33.3	50.8	71.0	95.3	125	164	219	304	442	668	995	1347	1546
30	0.00	0.00	0.00	0.01	8.89	23.5	39.8	57.0	76.9	101	129	166	212	274	360	468	579	658	673
35	0.00	0.00	0.00	0.00	1.15	11.3	26.1	41.6	58.0	76.4	97.7	123	154	191	240	302	371	434	468
40	0.00	0.00	0.00	0.00	4.64	16.0	31.1	45.5	60.3	76.8	95.6	116	139	164	191	219	243	259	263
45	0.00	0.00	0.00	0.00	0.00	5.67	17.1	30.8	44.3	57.5	71.8	87.4	104	122	141	160	178	193	200
50	0.00	0.00	0.00	0.00	0.01	8.19	19.5	32.4	44.0	55.0	66.3	78.3	90.5	102	114	124	132	137	138
55	0.00	0.00	0.00	0.00	0.00	1.32	8.19	18.4	29.2	39.8	49.5	58.8	67.7	76.5	84.9	92.6	99.4	105	107
60	0.00	0.00	0.00	0.00	0.00	1.17	8.74	17.3	27.1	36.4	43.9	50.0	55.5	60.7	65.5	69.9	73.7	76.1	76.9
65	0.00	0.00	0.00	0.00	0.00	0.00	2.08	6.02	13.3	21.2	28.1	33.7	38.7	43.0	46.4	49.2	51.6	53.7	54.9
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.95	9.11	14.7	19.2	23.5	27.3	29.7	30.8	31.4	32.3	33.0	33.3
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.74	5.70	8.32	10.5	12.6	14.2	15.1	15.6	15.8	16.3	16.6
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-12-28

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.2V I:0.2538A P:42.20W PF:0.5999 Lamp Flux:1777.13x1 lm		
NAME: 8.03.007.0153 30°SP-DKP-F170-24P-RDM-AL	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120059
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	12.4	11.9	11.2	10.6	9.88	8.91	7.56	6.00	4.10	1.72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	24.2	23.1	21.7	20.3	18.7	16.3	13.2	9.79	5.31	0.45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	46.5	45.1	42.8	40.0	37.1	33.7	29.7	25.4	20.0	13.5	7.37	3.43	0.10	0.00	0.00	0.00	0.00	0.00
-50	67.4	64.6	60.7	56.2	51.5	46.5	41.1	34.8	26.9	18.2	9.90	2.51	0.00	0.00	0.00	0.00	0.00	0.00
-45	99.2	95.8	90.3	83.7	76.4	68.8	60.9	52.6	43.4	33.6	23.2	13.0	3.99	0.00	0.00	0.00	0.00	0.00
-40	127	121	112	103	92.3	81.7	70.8	59.6	48.2	36.5	24.3	11.8	2.34	0.00	0.00	0.00	0.00	0.00
-35	188	178	163	146	128	112	96.2	81.5	67.2	53.2	39.3	25.4	12.1	2.35	0.00	0.00	0.00	0.00
-30	237	217	193	168	144	123	104	86.3	69.4	53.2	37.7	22.5	8.82	0.00	0.00	0.00	0.00	0.00
-25	408	367	313	258	210	171	140	113	92.1	72.8	54.5	37.3	21.1	7.47	0.11	0.00	0.00	0.00
-20	535	453	365	288	227	180	142	114	91.3	70.2	50.4	32.5	15.8	3.51	0.00	0.00	0.00	0.00
-15	1245	1000	721	500	351	256	192	148	116	90.9	68.3	47.5	29.1	12.5	1.28	0.00	0.00	0.00
-10	1685	1205	792	517	352	249	185	141	110	84.2	60.7	39.9	21.4	6.64	0.00	0.00	0.00	0.00
-5	3552	2592	1596	908	541	350	243	178	135	104	77.7	54.3	33.9	15.7	2.82	0.00	0.00	0.00
0	4340	2741	1500	803	475	309	217	160	120	91.3	65.9	43.5	23.9	8.04	0.00	0.00	0.00	0.00
5	5403	3848	2236	1184	656	401	268	192	142	109	81.3	56.9	35.6	17.0	3.45	0.00	0.00	0.00
10	4724	2921	1571	842	491	316	219	160	121	92.3	66.7	44.0	24.4	8.29	0.00	0.00	0.00	0.00
15	3948	2874	1730	975	570	363	249	181	136	105	78.4	54.7	33.9	15.9	2.81	0.00	0.00	0.00
20	1981	1380	879	558	369	259	190	144	111	84.8	61.1	40.0	21.2	6.48	0.00	0.00	0.00	0.00
25	1466	1159	813	549	375	267	199	153	119	92.9	69.5	48.3	29.4	12.7	1.29	0.00	0.00	0.00
30	615	514	406	313	239	187	148	118	94.3	72.5	51.9	33.5	16.7	4.07	0.00	0.00	0.00	0.00
35	459	411	346	280	224	179	145	118	96.1	75.8	56.7	39.0	22.6	8.48	0.28	0.00	0.00	0.00
40	252	232	205	178	152	129	109	90.7	73.2	55.9	39.9	24.6	10.3	0.58	0.00	0.00	0.00	0.00
45	199	189	174	155	137	119	103	86.8	71.7	56.9	42.4	28.3	14.5	3.59	0.00	0.00	0.00	0.00
50	136	129	121	111	99.7	88.5	76.7	64.4	52.3	40.4	28.1	14.9	4.79	0.00	0.00	0.00	0.00	0.00
55	107	104	98.8	92.0	84.3	76.2	67.7	58.7	48.8	38.5	27.6	16.8	6.91	0.58	0.00	0.00	0.00	0.00
60	75.8	73.1	69.1	64.3	59.3	53.8	47.9	41.2	33.1	23.6	14.2	6.21	0.00	0.00	0.00	0.00	0.00	0.00
65	54.9	53.6	51.3	48.6	45.6	42.2	37.9	32.9	27.1	20.2	12.3	5.43	1.62	0.00	0.00	0.00	0.00	0.00
70	32.8	31.6	30.3	29.3	28.0	25.7	22.0	17.9	13.1	7.44	1.43	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	16.6	16.2	15.5	15.0	14.4	13.6	12.2	10.1	8.06	5.45	2.51	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

$H(\beta)$ Range:-90 - 90DEG
 $H(\beta)$ Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-12-28

$V(\beta)$ Range:-80 - 80DEG
 $V(\beta)$ Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks: