

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		3566.8 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	51.1V x 49.5H
	At 50% of Imax	24.3V x 23.5H
	At 90% of Imax	12.8V x 8.7H
Beam Flux	Total	999.0 lumens per klm.
	To 10% of Imax	765.7 lumens per klm.
	To 50% of Imax	382.8 lumens per klm.
	To 90% of Imax	87.4 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-28

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.4V I:0.5620A P:44.31W PF:0.6547 Lamp Flux:705.689x1 lm		
NAME: 8.03.007.0153 30°SP-DKP-F170-24P-RDM-AL-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120057
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

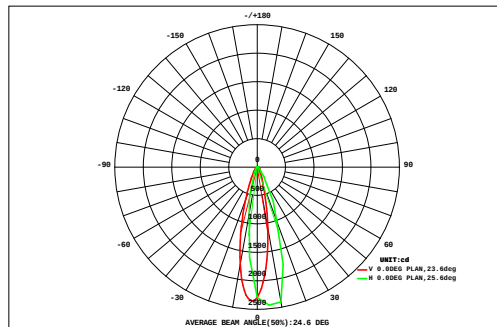

DATA OF LAMP		Eff:15.93lm/W	
MODEL	DKP-F170-24P-RDM-AL	Imax(cd)	2517
NOMINAL POWER(W)	44	AVAILABILITY(%)	77.9
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	549.5
NOMINAL FLUX(lm)	705.689	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	705.7
TEST VOLTAGE(V)	120.4	θ @50%(H,V)	23,24DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.11	0.17	0.25	0.33	0.43	0.53	0.63	0.71	0.75	0.74	0.69	0.61	0.51	0.41	0.33	0.25	0.19	0.14	7.77	0.00
45	0.21	0.29	0.39	0.50	0.64	0.78	0.90	0.97	0.98	0.92	0.81	0.68	0.54	0.43	0.33	0.25	0.18	0.12	9.91	0.00
40	0.17	0.27	0.39	0.55	0.77	1.07	1.41	1.74	1.94	1.94	1.72	1.39	1.05	0.76	0.55	0.40	0.29	0.20	16.6	3.23
35	0.29	0.43	0.63	0.90	1.28	1.75	2.25	2.61	2.70	2.42	1.96	1.45	1.03	0.72	0.51	0.36	0.25	0.17	21.7	11.8
30	0.23	0.36	0.55	0.85	1.36	2.23	3.52	5.09	6.25	6.33	5.29	3.74	2.35	1.43	0.89	0.58	0.39	0.27	41.7	34.6
25	0.38	0.60	0.95	1.55	2.61	4.31	6.60	8.61	9.17	7.93	5.63	3.42	1.95	1.14	0.70	0.46	0.31	0.21	56.5	50.1
20	0.25	0.40	0.65	1.08	1.89	3.55	6.66	11.4	15.5	16.0	12.9	8.45	4.62	2.35	1.26	0.75	0.48	0.31	88.5	82.7
15	0.42	0.68	1.17	2.10	4.01	7.73	13.8	20.1	22.0	18.1	11.8	6.30	2.95	1.45	0.83	0.52	0.34	0.23	115	109
10	0.25	0.40	0.62	1.00	1.73	3.24	6.31	11.3	16.8	18.7	15.6	10.1	5.35	2.61	1.36	0.78	0.49	0.32	97.0	91.1
5	0.40	0.64	1.06	1.89	3.59	6.85	11.7	16.4	17.9	14.7	9.10	4.47	2.09	1.15	0.71	0.46	0.31	0.21	93.7	87.6
0	0.22	0.33	0.49	0.71	1.07	1.73	3.12	5.56	8.43	10.00	8.90	6.13	3.49	1.87	1.07	0.66	0.43	0.29	54.5	47.8
-5	0.31	0.47	0.71	1.11	1.72	2.64	3.71	4.35	3.95	2.73	1.68	1.08	0.80	0.65	0.49	0.36	0.26	0.18	27.2	19.7
-10	0.17	0.25	0.35	0.48	0.66	0.91	1.31	1.95	2.68	3.09	2.86	2.19	1.50	0.99	0.67	0.47	0.33	0.23	21.1	12.1
-15	0.22	0.32	0.43	0.57	0.72	0.85	0.88	0.74	0.58	0.48	0.42	0.40	0.40	0.38	0.32	0.25	0.19	0.13	8.31	0.00
-20	0.11	0.17	0.24	0.31	0.40	0.51	0.63	0.76	0.87	0.92	0.88	0.77	0.64	0.51	0.39	0.30	0.23	0.17	8.82	0.00
-25	0.14	0.19	0.25	0.31	0.36	0.40	0.42	0.41	0.39	0.36	0.34	0.31	0.28	0.25	0.21	0.17	0.13	0.09	5.01	0.00
-30	0.06	0.10	0.14	0.18	0.23	0.27	0.32	0.36	0.38	0.39	0.38	0.35	0.31	0.27	0.22	0.18	0.14	0.10	4.39	0.00
-35	0.07	0.10	0.13	0.16	0.18	0.20	0.22	0.22	0.22	0.21	0.20	0.18	0.16	0.14	0.12	0.09	0.07	0.04	2.70	0.00
-40	0.07	0.10	0.13	0.16	0.18	0.20	0.22	0.22	0.22	0.21	0.20	0.18	0.16	0.14	0.12	0.09	0.07	0.04	2.70	0.00
-45	0.07	0.10	0.13	0.16	0.18	0.20	0.22	0.22	0.22	0.21	0.20	0.18	0.16	0.14	0.12	0.09	0.07	0.04	2.70	0.00
	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)	10	15	20	25	30	35	40	45			
Φ t	4.02	6.16	9.38	14.6	23.7	39.6	64.4	93.3	112	106	81.2	52.0	30.0	17.5	10.9	7.29	5.00	3.42	680	---
Φ a	0.00	0.00	0.00	3.72	13.3	32.3	57.7	87.3	106	101	75.1	45.2	21.3	6.48	0.22	0.00	0.00	0.00	---	550

one-half-peak spread: U:16.6,D:7.9 , L:11.3,R:12.3


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-28

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.4V I:0.5620A P:44.31W PF:0.6547 Lamp Flux:705.689x1 lm		
NAME: 8.03.007.0153 30°SP-DKP-F170-24P-RDM-AL-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120057
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

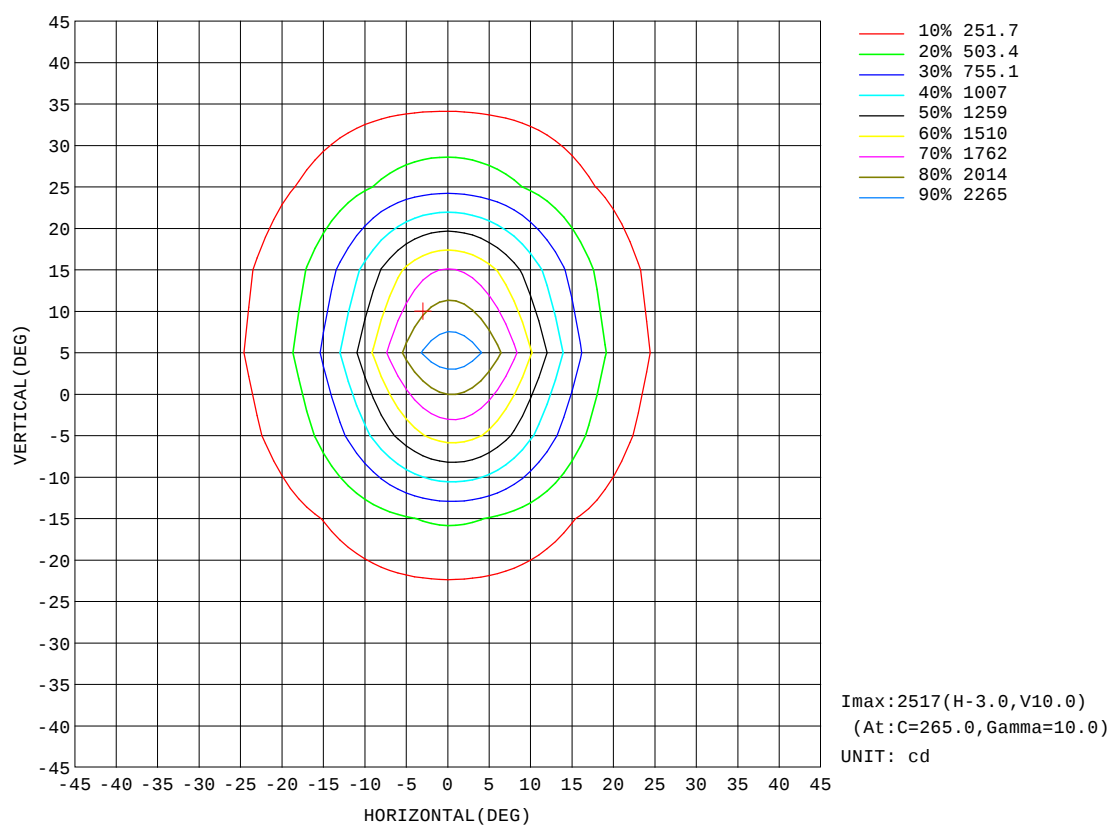


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-28

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.4V I:0.5620A P:44.31W PF:0.6547 Lamp Flux:705.689x1 lm		
NAME: 8.03.007.0153 30°SP-DKP-F170-24P-RDM-AL-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120057
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

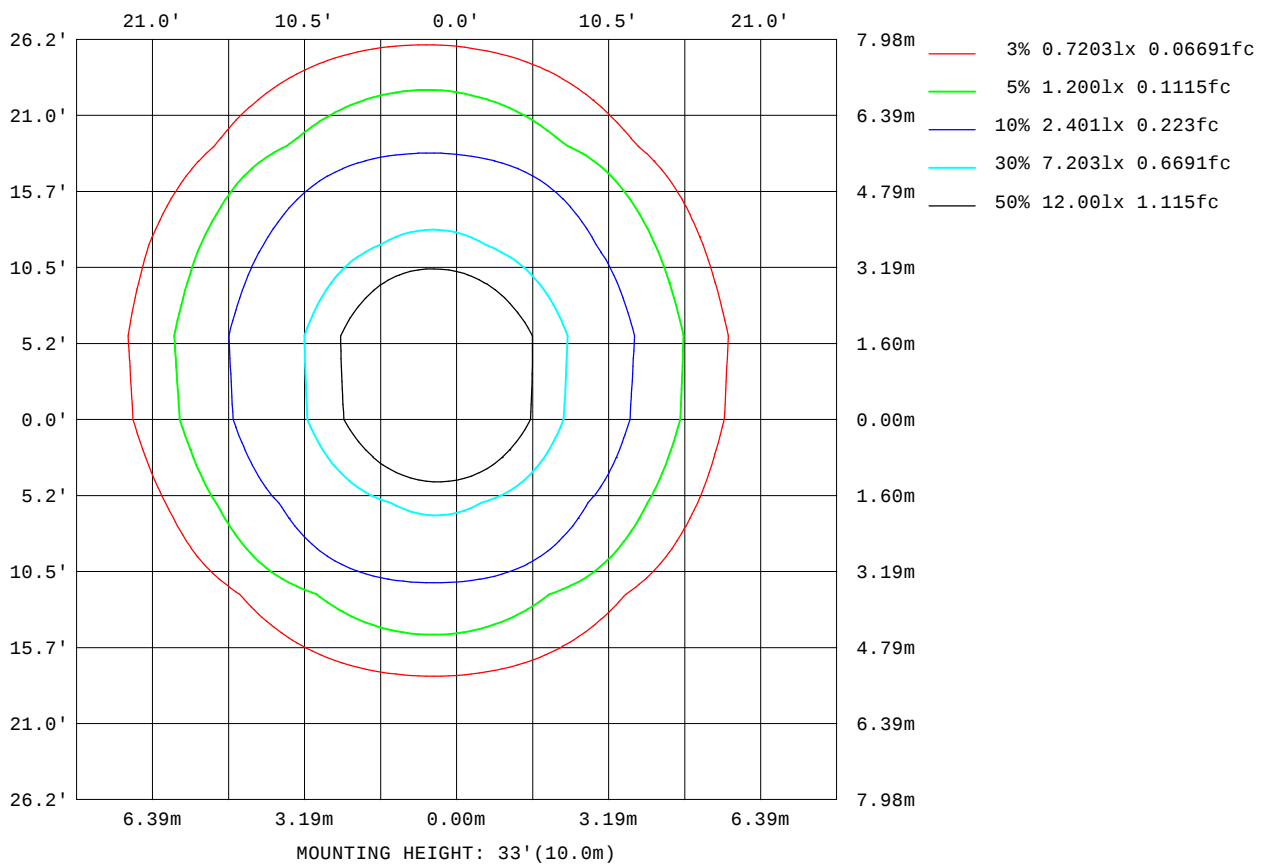


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-28

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.4V I:0.5620A P:44.31W PF:0.6547 Lamp Flux:705.689x1 lm		
NAME: 8.03.007.0153 30°SP-DKP-F170-24P-RDM-AL-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120057
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

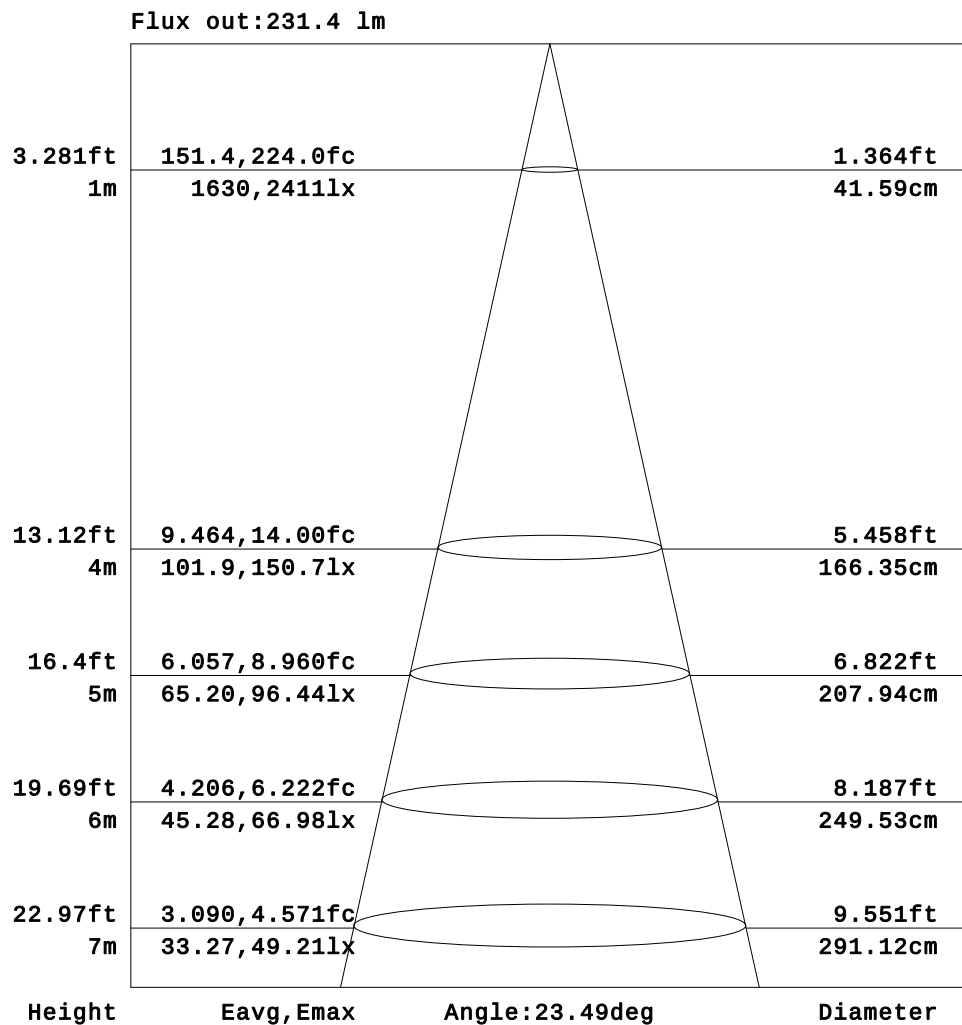


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-28

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

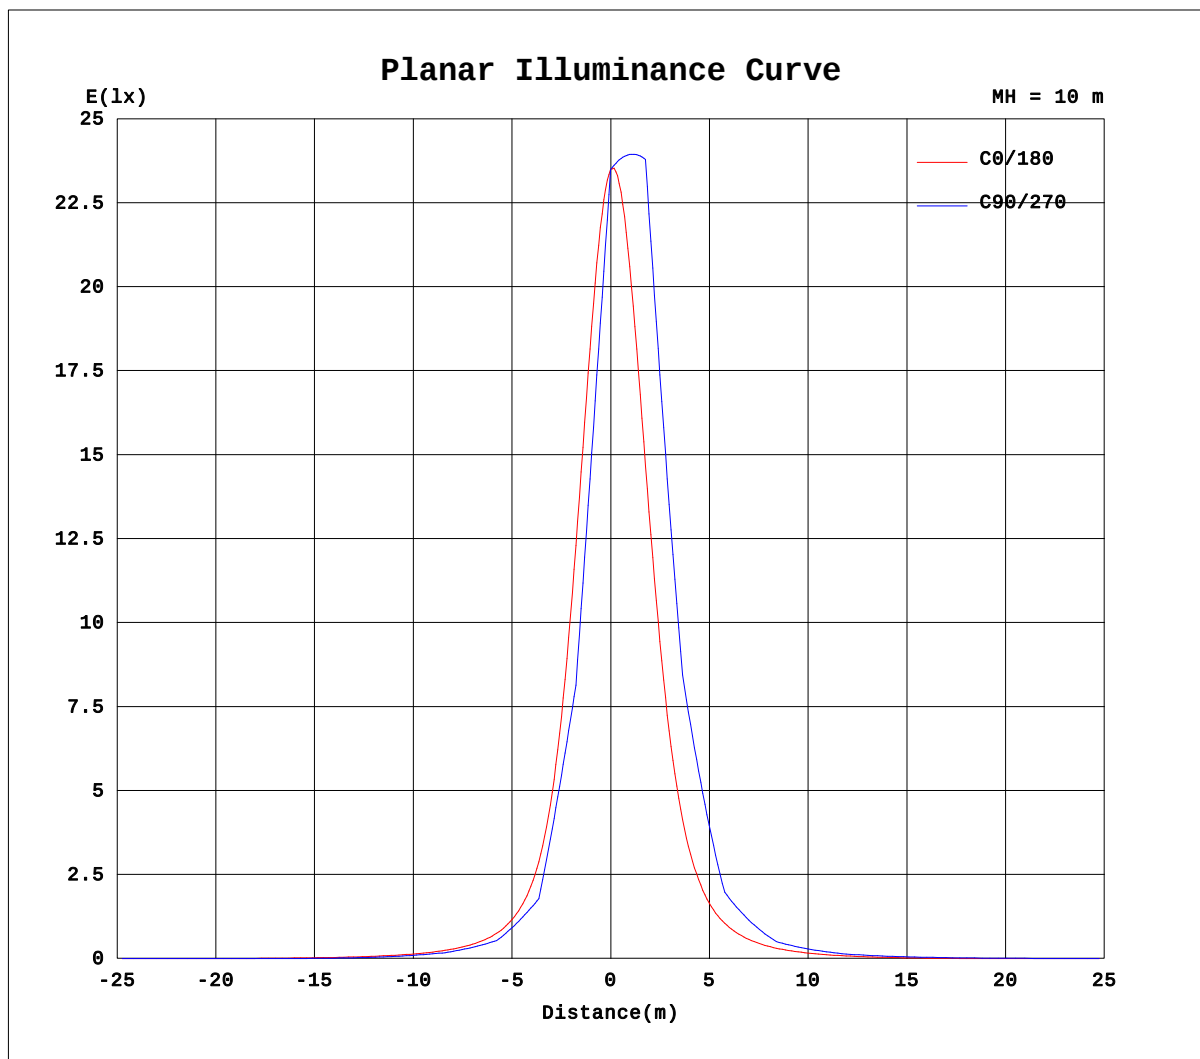

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-28

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.4V I:0.5620A P:44.31W PF:0.6547 Lamp Flux:705.689x1 lm		
NAME: 8.03.007.0153 30°SP-DKP-F170-24P-RDM-AL-B TYPE:LED		WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120057
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	1.67	3.07	4.22	5.24	6.14	6.95	7.68	8.20
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.05	5.08	7.55	9.70	11.6	13.3	14.8	16.1	16.7	16.8
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.92	4.36	8.21	11.9	15.3	18.5	21.5	24.1	26.4	27.9	28.3
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.91	6.69	11.3	15.8	20.3	24.8	29.0	32.9	36.3	38.7	39.9	39.8
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.05	7.18	12.8	18.7	25.0	31.5	38.2	44.9	51.4	56.9	60.6	61.9
-30	0.00	0.00	0.00	0.00	0.00	0.00	1.66	8.02	14.3	21.4	29.1	37.3	46.2	55.5	64.8	73.5	80.1	83.5	82.8
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.79	6.44	13.8	21.9	31.0	41.6	54.0	68.7	86.5	107	128	144	150
-20	0.00	0.00	0.00	0.00	0.00	0.00	5.81	13.6	22.6	33.1	45.2	60.2	78.8	102	132	166	197	215	212
-15	0.00	0.00	0.00	0.00	0.00	0.00	2.83	10.6	19.9	31.1	44.3	61.6	85.1	120	174	257	370	483	537
-10	0.00	0.00	0.00	0.00	0.00	0.97	8.99	18.4	30.1	44.2	62.9	89.2	129	197	307	478	686	836	832
-5	0.00	0.00	0.00	0.00	0.00	0.00	4.96	13.9	25.1	38.8	56.6	82.2	122	192	325	569	951	1370	1601
0	0.00	0.00	0.00	0.00	0.00	2.49	11.2	22.1	35.9	53.2	78.5	118	189	328	602	1093	1736	2259	2292
5	0.00	0.00	0.00	0.00	0.00	0.00	5.72	15.1	27.4	42.5	62.8	93.7	145	240	428	792	1388	2074	2431
10	0.00	0.00	0.00	0.00	0.00	2.27	11.0	22.0	36.2	54.2	80.7	123	201	347	636	1158	1887	2455	2403
15	0.00	0.00	0.00	0.00	0.00	0.00	4.99	14.1	26.0	40.8	60.0	88.6	135	216	366	638	1068	1548	1772
20	0.00	0.00	0.00	0.00	0.00	1.15	9.49	19.7	32.9	48.8	70.6	103	155	241	386	599	847	1009	992
25	0.00	0.00	0.00	0.00	0.00	0.00	2.88	11.1	21.5	34.5	50.0	70.9	101	147	221	331	475	611	667
30	0.00	0.00	0.00	0.00	0.00	0.00	5.84	14.3	25.0	37.9	52.7	71.9	97.7	132	178	230	278	305	298
35	0.00	0.00	0.00	0.00	0.00	0.00	0.69	6.75	14.9	24.9	36.5	49.9	66.1	86.8	114	145	177	202	211
40	0.00	0.00	0.00	0.00	0.00	0.00	1.87	8.61	16.2	25.5	35.8	46.4	58.2	71.4	85.6	99.2	110	114	112
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.31	8.33	15.1	22.8	31.1	40.0	49.3	59.0	68.5	76.7	82.1	83.2
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.06	8.28	13.7	19.6	26.2	32.9	38.8	43.9	48.1	51.2	52.5	51.6
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.57	6.85	11.4	16.0	20.7	25.1	29.0	32.5	35.4	37.1	37.5
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.66	5.46	8.67	11.4	13.9	16.3	18.5	20.5	21.9	22.6	22.4
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.64	3.41	4.92	6.49	8.15	9.34	10.4	11.3	12.0	12.3
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	1.22	1.53	1.41	1.41	1.64	1.92
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.31	0.74	0.75	0.69	0.73	0.97
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-12-28

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.4V I:0.5620A P:44.31W PF:0.6547 Lamp Flux:705.689x1 lm		
NAME: 8.03.007.0153 30°SP-DKP-F170-24P-RDM-AL-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120057
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	8.31	7.94	7.33	6.60	5.81	4.91	3.90	2.75	1.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	16.2	15.2	13.8	12.3	10.6	8.65	6.47	3.83	0.48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	28.0	26.6	24.6	22.1	19.5	16.7	13.8	10.6	7.10	3.70	1.34	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	38.3	35.7	32.5	28.9	25.2	21.2	17.3	13.3	9.13	4.64	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	60.4	56.5	51.0	44.8	38.5	32.6	27.0	21.6	16.3	11.1	5.82	1.51	0.00	0.00	0.00	0.00	0.00	0.00
-30	78.2	70.9	62.1	53.1	44.7	37.1	30.1	23.5	17.2	11.3	5.43	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	143	126	105	84.6	67.4	53.7	42.7	33.5	25.6	18.4	11.6	5.07	0.23	0.00	0.00	0.00	0.00	0.00
-20	189	156	123	94.6	72.9	56.5	43.9	33.8	25.1	17.2	9.89	3.02	0.00	0.00	0.00	0.00	0.00	0.00
-15	493	379	260	172	117	83.4	61.4	46.1	34.5	25.0	16.4	8.77	1.67	0.00	0.00	0.00	0.00	0.00
-10	668	453	284	178	117	81.7	59.3	43.8	32.1	22.3	13.6	5.82	0.00	0.00	0.00	0.00	0.00	0.00
-5	1458	1039	611	331	188	118	79.7	56.9	41.5	29.8	19.9	11.2	3.44	0.00	0.00	0.00	0.00	0.00
0	1777	1087	562	289	164	103	70.4	50.3	36.2	25.0	15.5	7.11	0.06	0.00	0.00	0.00	0.00	0.00
5	2177	1532	880	447	234	138	89.5	62.3	44.6	31.8	21.2	12.1	4.08	0.00	0.00	0.00	0.00	0.00
10	1844	1161	614	312	172	107	72.7	51.7	36.9	25.4	15.7	7.26	0.14	0.00	0.00	0.00	0.00	0.00
15	1575	1136	687	371	205	125	83.6	58.8	42.4	30.1	19.9	11.2	3.38	0.00	0.00	0.00	0.00	0.00
20	806	553	340	206	130	88.0	62.0	45.1	32.4	22.4	13.4	5.56	0.00	0.00	0.00	0.00	0.00	0.00
25	609	472	322	207	136	92.5	66.2	48.5	35.8	25.4	16.4	8.61	1.52	0.00	0.00	0.00	0.00	0.00
30	260	207	156	115	84.7	63.2	47.7	35.9	26.1	17.6	9.94	2.95	0.00	0.00	0.00	0.00	0.00	0.00
35	197	169	135	104	79.7	61.1	47.0	36.0	26.8	18.8	11.6	4.96	0.23	0.00	0.00	0.00	0.00	0.00
40	103	90.6	76.5	63.0	51.2	41.2	32.5	24.8	17.8	11.3	5.22	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	79.9	73.0	64.0	54.4	45.3	37.2	30.0	23.3	17.2	11.5	6.00	1.41	0.00	0.00	0.00	0.00	0.00	0.00
50	48.9	44.9	40.0	34.5	29.5	24.4	19.4	14.5	9.78	5.12	0.32	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	36.4	34.1	30.9	27.2	23.4	19.7	15.9	12.1	8.18	4.11	1.60	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	21.3	19.6	17.4	15.1	12.8	10.4	7.89	5.07	1.68	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	11.9	11.1	9.87	8.48	7.11	5.94	4.70	3.42	1.89	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	1.67	1.18	0.65	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.93	0.75	0.48	0.22	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

$H(\beta)$ Range:-90 - 90DEG
 $H(\beta)$ Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-12-28

$V(\beta)$ Range:-80 - 80DEG
 $V(\beta)$ Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks: