

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		3597.5 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	51.2V x 49.4H
	At 50% of Imax	24.0V x 23.4H
	At 90% of Imax	12.1V x 8.7H
Beam Flux	Total	999.1 lumens per klm.
	To 10% of Imax	762.9 lumens per klm.
	To 50% of Imax	376.6 lumens per klm.
	To 90% of Imax	74.8 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-29

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:276.8V I:0.2629A P:44.10W PF:0.6060 Lamp Flux:703.803x1 lm		
NAME: 8.03.007.0153 30°SP-DKP-F170-24P-RDM-AL-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120062
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

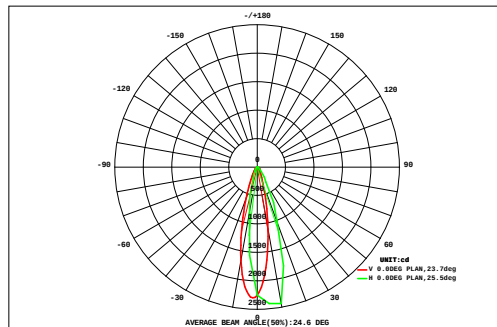

DATA OF LAMP		Eff:15.96lm/W	
MODEL	DKP-F170-24P-RDM-AL	Imax(cd)	2532
NOMINAL POWER(W)	44	AVAILABILITY(%)	77.6
RATED VOLTAGE(V)	276	Avai. FLUX(lm)	545.9
NOMINAL FLUX(lm)	703.803	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	703.8
TEST VOLTAGE(V)	276.8	θ @50%(H,V)	23,24DEG

AREA FLUX DIAGRAM																	UNIT:lm		Φ t	Φ a
45	0.12	0.18	0.25	0.34	0.44	0.54	0.64	0.72	0.77	0.76	0.71	0.62	0.52	0.42	0.33	0.26	0.19	0.14	7.97	0.00
40	0.21	0.30	0.40	0.52	0.65	0.79	0.92	1.00	1.01	0.95	0.83	0.69	0.56	0.44	0.33	0.25	0.18	0.12	10.2	0.00
35	0.17	0.27	0.39	0.56	0.78	1.08	1.43	1.77	2.00	2.01	1.78	1.43	1.08	0.79	0.57	0.41	0.29	0.21	17.0	3.65
30	0.29	0.43	0.63	0.90	1.29	1.78	2.29	2.68	2.78	2.52	2.03	1.50	1.06	0.74	0.52	0.36	0.26	0.18	22.2	12.5
25	0.23	0.35	0.54	0.85	1.35	2.21	3.53	5.16	6.40	6.55	5.51	3.90	2.45	1.48	0.92	0.59	0.40	0.27	42.7	35.7
20	0.38	0.59	0.94	1.53	2.59	4.31	6.65	8.80	9.46	8.25	5.88	3.57	2.02	1.18	0.72	0.47	0.32	0.21	57.9	51.3
15	0.25	0.40	0.64	1.06	1.84	3.45	6.51	11.2	15.5	16.3	13.2	8.71	4.79	2.43	1.30	0.76	0.48	0.32	89.2	83.1
10	0.41	0.67	1.14	2.05	3.89	7.53	13.5	20.0	22.2	18.4	12.1	6.49	3.04	1.49	0.84	0.53	0.35	0.23	115	109
5	0.24	0.39	0.60	0.97	1.65	3.07	5.98	10.8	16.4	18.5	15.6	10.2	5.48	2.68	1.39	0.79	0.50	0.33	95.6	89.7
0	0.39	0.62	1.03	1.80	3.39	6.47	11.2	15.7	17.4	14.5	9.10	4.53	2.13	1.17	0.72	0.47	0.32	0.22	91.1	85.0
-5	0.21	0.32	0.47	0.69	1.03	1.64	2.93	5.24	8.02	9.67	8.76	6.11	3.52	1.90	1.08	0.66	0.43	0.29	53.0	46.1
-10	0.30	0.46	0.69	1.06	1.63	2.49	3.50	4.13	3.79	2.64	1.64	1.07	0.79	0.64	0.49	0.36	0.26	0.18	26.1	18.3
-15	0.16	0.24	0.34	0.47	0.64	0.87	1.25	1.85	2.56	2.97	2.79	2.16	1.50	1.00	0.67	0.47	0.33	0.23	20.5	11.4
-20	0.22	0.31	0.42	0.55	0.70	0.83	0.86	0.74	0.58	0.48	0.42	0.40	0.40	0.38	0.32	0.25	0.19	0.14	8.19	0.00
-25	0.11	0.16	0.23	0.31	0.39	0.50	0.61	0.74	0.85	0.90	0.86	0.77	0.64	0.51	0.39	0.30	0.23	0.17	8.67	0.00
-30	0.13	0.19	0.24	0.30	0.36	0.40	0.42	0.41	0.39	0.36	0.34	0.31	0.29	0.25	0.21	0.17	0.13	0.09	5.00	0.00
-35	0.06	0.10	0.14	0.18	0.23	0.27	0.32	0.36	0.38	0.39	0.38	0.36	0.32	0.27	0.23	0.18	0.14	0.11	4.41	0.00
-40	0.07	0.10	0.13	0.16	0.19	0.21	0.22	0.23	0.23	0.22	0.21	0.19	0.17	0.15	0.12	0.10	0.07	0.05	2.81	0.00
-45	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL(DEG)	10	15	20	25	30	35	40	45			
Φ t	3.95	6.07	9.22	14.3	23.0	38.4	62.7	91.6	111	106	82.2	53.1	30.7	17.9	11.1	7.40	5.07	3.47	677	---
Φ a	0.00	0.00	0.00	3.27	12.2	31.0	55.9	85.4	105	101	76.3	46.1	22.1	6.87	0.29	0.00	0.00	0.00	---	546

one-half-peak spread: U:16.2,D:8.0 , L:11.1,R:12.6


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-12-29

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:276.8V I:0.2629A P:44.10W PF:0.6060 Lamp Flux:703.803x1 lm		
NAME: 8.03.007.0153 30°SP-DKP-F170-24P-RDM-AL-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120062
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

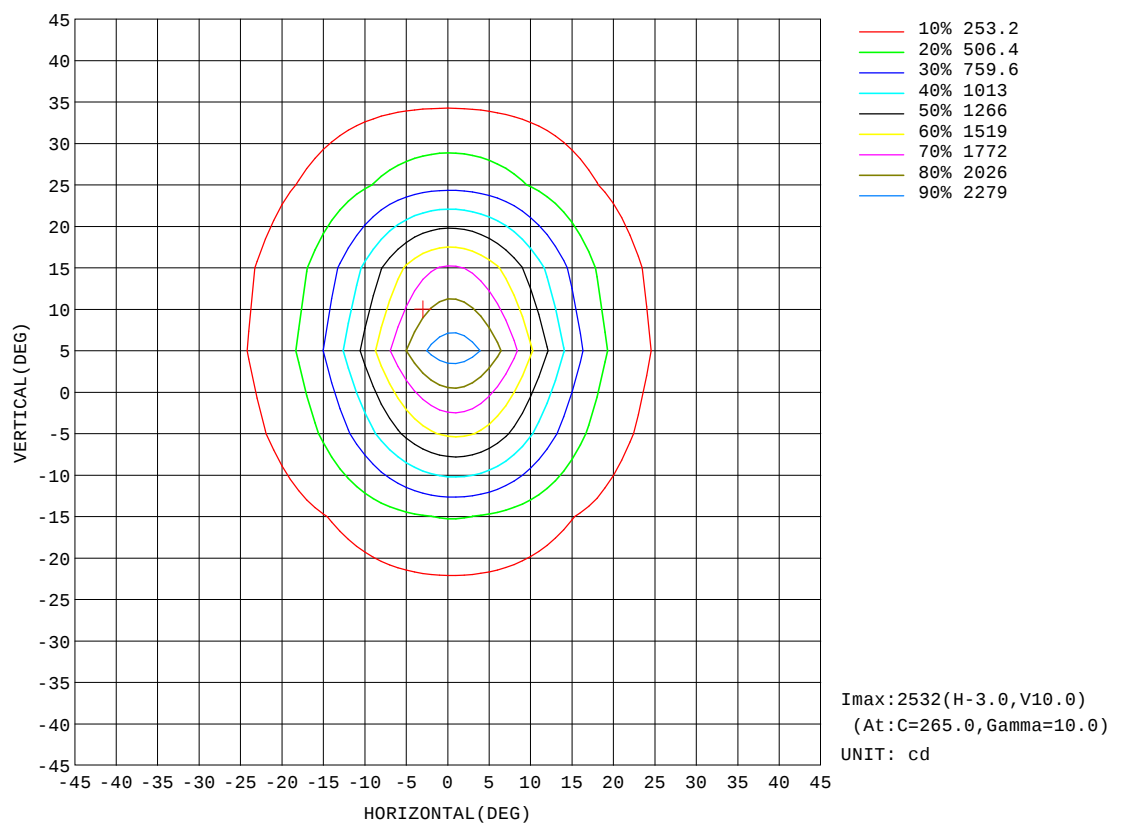


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-29

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:276.8V I:0.2629A P:44.10W PF:0.6060 Lamp Flux:703.803x1 lm		
NAME: 8.03.007.0153 30°SP-DKP-F170-24P-RDM-AL-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120062
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

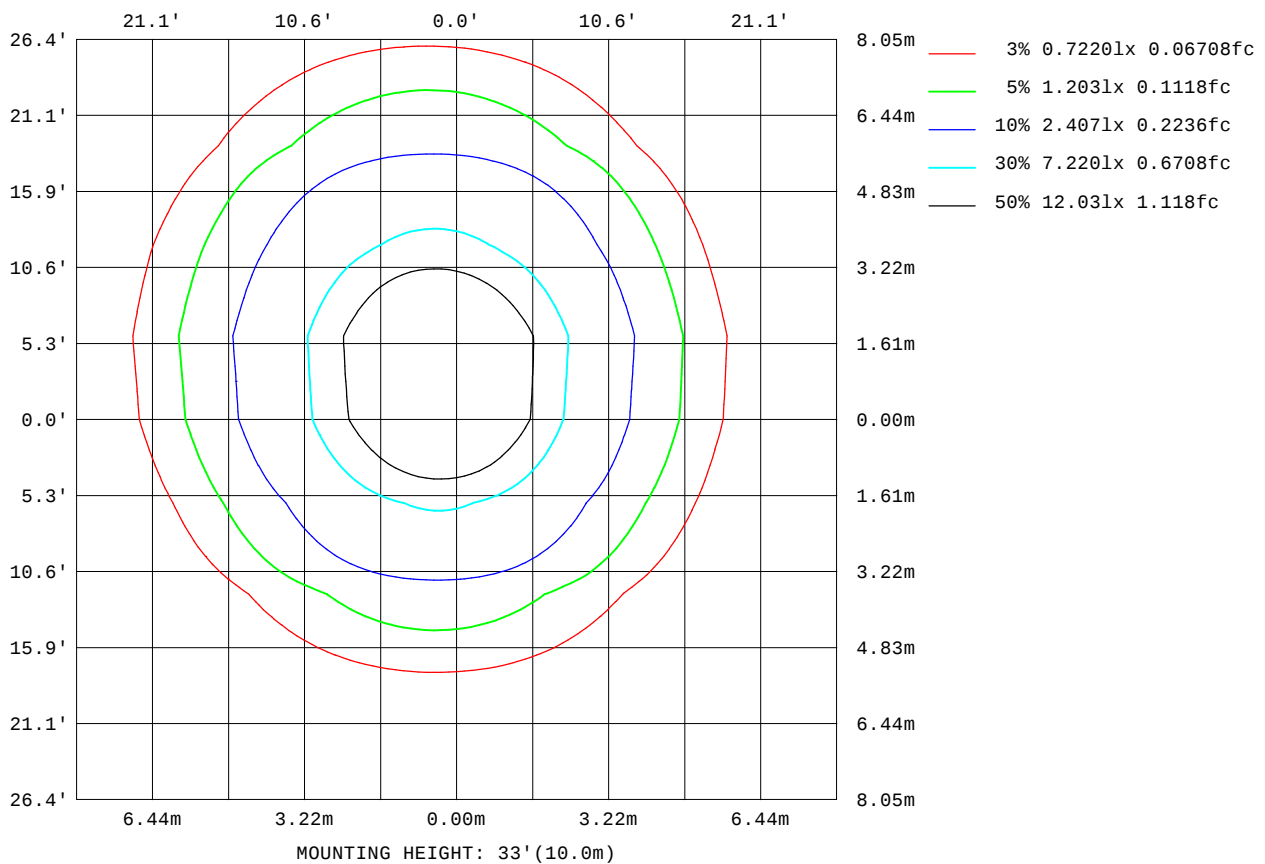


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-29

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:276.8V I:0.2629A P:44.10W PF:0.6060 Lamp Flux:703.803x1 lm		
NAME: 8.03.007.0153 30°SP-DKP-F170-24P-RDM-AL-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120062
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

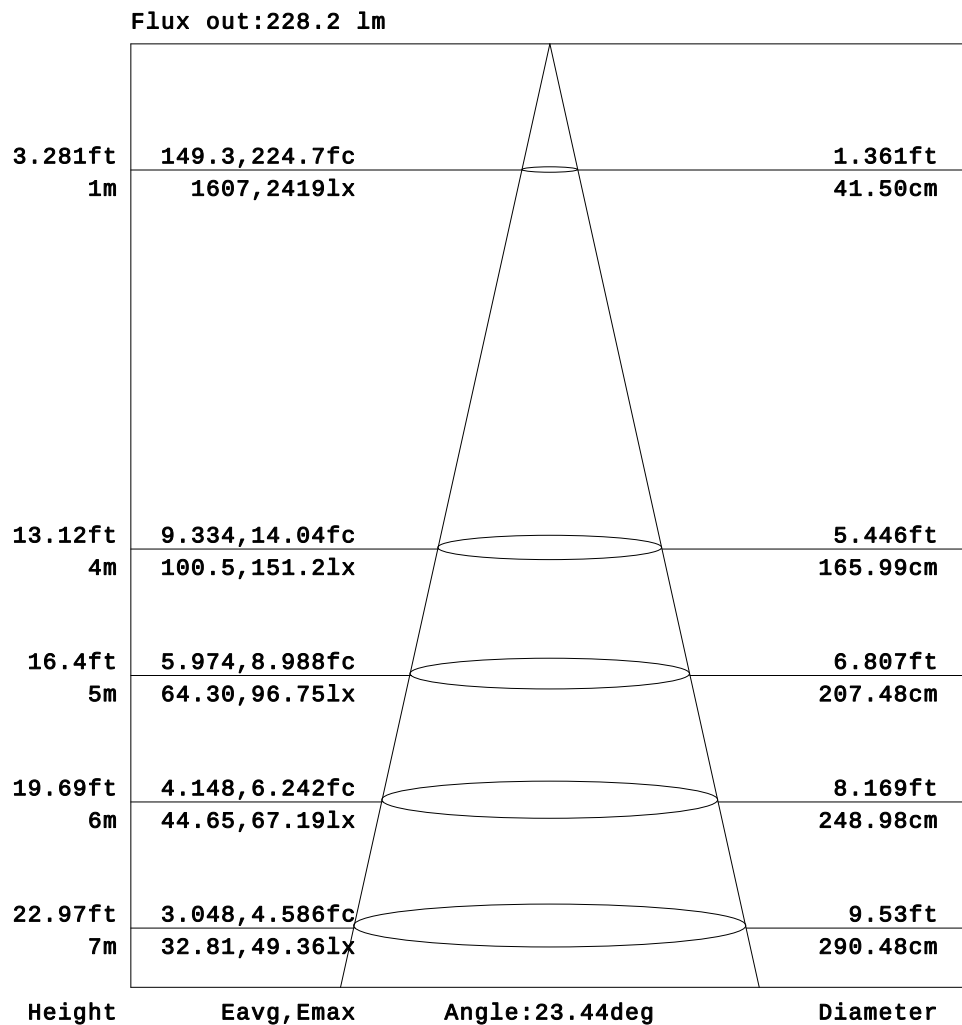


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-29

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

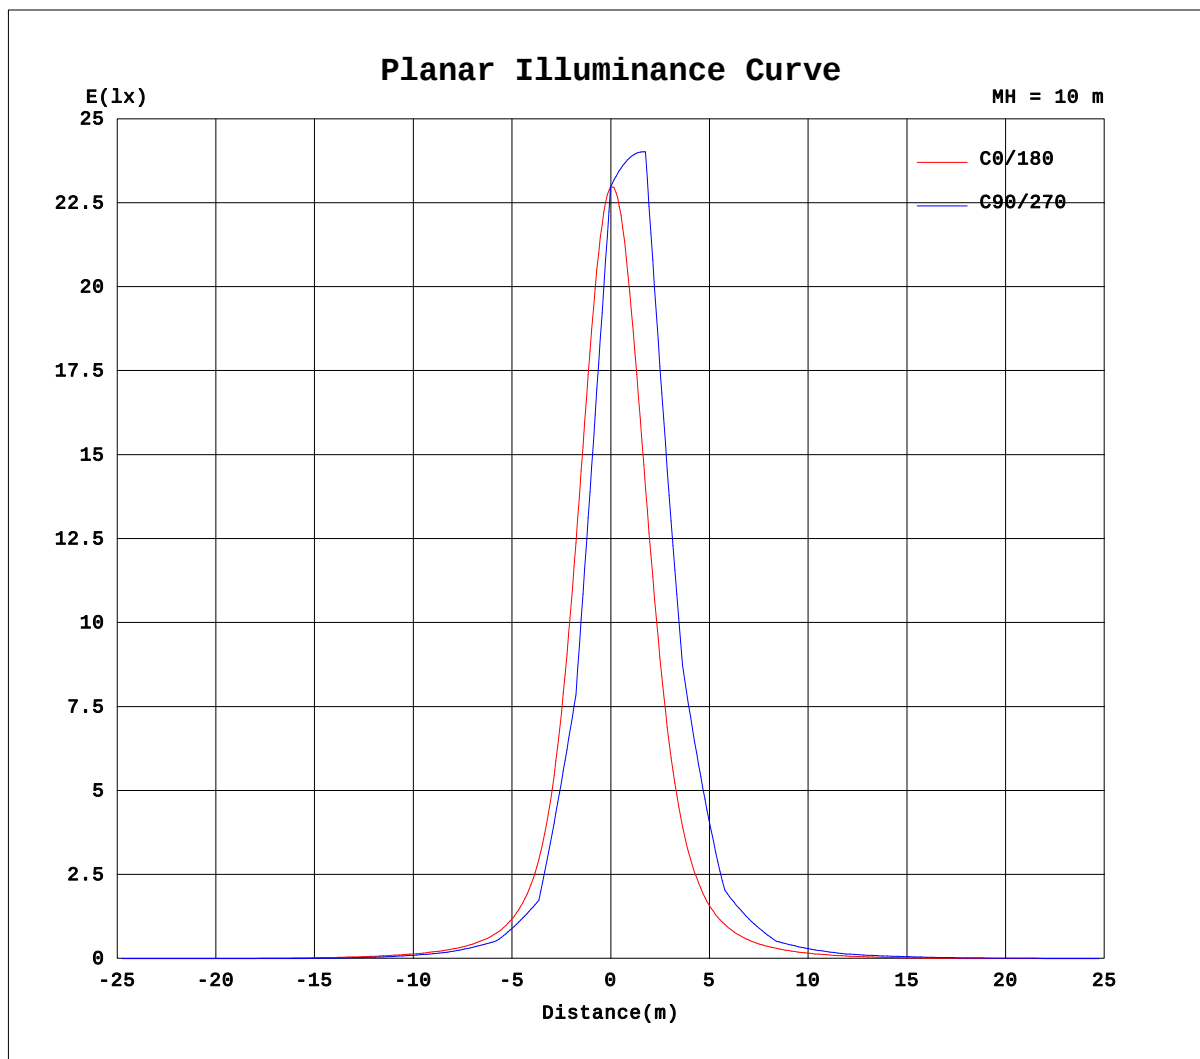

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-29

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:276.8V I:0.2629A P:44.10W PF:0.6060 Lamp Flux:703.803x1 lm		
NAME: 8.03.007.0153 30°SP-DKP-F170-24P-RDM-AL-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120062
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.23
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16	1.84	3.31	4.50	5.52	6.43	7.24	7.95	8.48	8.81
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.35	5.52	8.09	10.3	12.2	13.9	15.3	16.6	17.3	17.4
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.91	4.42	8.38	12.2	15.6	18.9	21.9	24.5	26.8	28.4	29.0
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.87	6.64	11.3	15.8	20.4	24.9	29.2	33.2	36.5	39.1	40.5	40.5
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.87	6.87	12.5	18.4	24.6	31.0	37.7	44.3	50.7	56.2	60.1	61.5
-30	0.00	0.00	0.00	0.00	0.00	0.00	1.20	7.41	13.8	20.7	28.3	36.4	45.1	54.2	63.2	71.7	78.5	82.1	81.8
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.53	5.97	13.1	21.0	30.0	40.4	52.4	66.6	83.6	103	124	140	147
-20	0.00	0.00	0.00	0.00	0.00	0.00	5.27	12.9	21.7	31.9	43.7	58.2	76.2	98.8	127	160	190	209	207
-15	0.00	0.00	0.00	0.00	0.00	0.00	2.31	10.0	19.1	29.9	42.9	59.6	82.3	116	166	244	351	461	517
-10	0.00	0.00	0.00	0.00	0.00	0.63	8.45	17.7	29.1	42.8	60.9	86.3	124	188	291	452	650	800	805
-5	0.00	0.00	0.00	0.00	0.00	0.00	4.47	13.3	24.2	37.6	54.9	79.7	118	185	309	539	904	1313	1553
0	0.00	0.00	0.00	0.00	0.00	2.03	10.7	21.3	34.8	51.8	76.3	115	182	313	571	1038	1661	2187	2251
5	0.00	0.00	0.00	0.00	0.00	0.00	5.29	14.7	26.7	41.5	61.4	91.5	142	232	412	761	1342	2026	2408
10	0.00	0.00	0.00	0.00	0.00	1.91	10.7	21.6	35.6	53.3	79.3	121	196	338	620	1132	1861	2456	2433
15	0.00	0.00	0.00	0.00	0.00	0.00	4.60	13.8	25.6	40.3	59.2	87.4	133	212	359	628	1055	1548	1794
20	0.00	0.00	0.00	0.00	0.00	0.86	9.19	19.4	32.6	48.4	70.0	102	154	239	384	601	859	1036	1027
25	0.00	0.00	0.00	0.00	0.00	0.00	2.60	11.0	21.4	34.3	49.8	70.7	101	147	220	332	480	623	687
30	0.00	0.00	0.00	0.00	0.00	0.00	5.65	14.3	25.1	38.0	52.8	72.2	98.3	133	180	234	284	314	309
35	0.00	0.00	0.00	0.00	0.00	0.00	0.60	6.69	15.1	25.2	36.9	50.4	66.9	87.9	115	147	181	207	217
40	0.00	0.00	0.00	0.00	0.00	0.00	1.85	8.78	16.7	26.1	36.6	47.5	59.6	73.2	87.7	102	112	117	115
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.36	8.62	15.6	23.5	32.1	41.1	50.7	60.6	70.2	78.6	84.2	85.5
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.26	8.72	14.5	20.6	27.4	34.1	40.1	45.2	49.5	52.6	53.9	53.1
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	2.72	7.34	12.1	16.9	21.6	26.1	30.1	33.7	36.6	38.4	38.8
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.93	5.99	9.30	12.1	14.6	17.1	19.4	21.7	23.0	23.7	23.5
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.82	3.70	5.24	7.09	8.78	10.0	11.1	12.1	12.9	13.1
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.52	1.71	2.01	1.88	1.92	2.20	2.51	2.51
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.56	0.97	0.98	0.94	0.99	1.17	1.26
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-12-29

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:276.8V I:0.2629A P:44.10W PF:0.6060 Lamp Flux:703.803x1 lm		
NAME: 8.03.007.0153 30°SP-DKP-F170-24P-RDM-AL-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120062
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	8.77	8.32	7.76	7.06	6.31	5.45	4.47	3.32	1.88	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	17.0	16.0	14.7	13.2	11.6	9.75	7.60	5.03	1.65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	28.7	27.4	25.4	23.0	20.5	17.7	14.7	11.5	8.06	4.16	1.69	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	39.1	36.6	33.3	29.8	26.0	22.1	18.1	13.9	9.77	5.38	0.41	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	60.3	56.6	51.3	45.2	39.1	33.1	27.5	22.1	16.8	11.6	6.35	1.72	0.00	0.00	0.00	0.00	0.00	0.00
-30	77.6	70.6	62.0	53.2	44.9	37.3	30.4	23.8	17.6	11.7	5.84	0.16	0.00	0.00	0.00	0.00	0.00	0.00
-25	141	125	104	84.5	67.5	53.8	42.8	33.6	25.8	18.6	11.9	5.36	0.27	0.00	0.00	0.00	0.00	0.00
-20	186	155	123	94.7	73.0	56.7	44.1	33.9	25.1	17.3	10.1	3.32	0.00	0.00	0.00	0.00	0.00	0.00
-15	480	374	259	173	118	83.8	61.6	46.2	34.7	25.2	16.7	8.98	1.86	0.00	0.00	0.00	0.00	0.00
-10	655	450	285	179	118	82.3	59.7	44.1	32.3	22.6	13.9	6.11	0.00	0.00	0.00	0.00	0.00	0.00
-5	1436	1037	618	336	191	119	80.5	57.4	41.8	30.1	20.1	11.5	3.74	0.00	0.00	0.00	0.00	0.00
0	1773	1099	574	295	167	104	71.1	50.8	36.6	25.3	15.8	7.41	0.21	0.00	0.00	0.00	0.00	0.00
5	2184	1554	901	459	239	140	90.7	62.9	45.1	32.1	21.5	12.4	4.36	0.00	0.00	0.00	0.00	0.00
10	1886	1195	635	322	176	109	73.9	52.1	37.2	25.8	16.0	7.53	0.28	0.00	0.00	0.00	0.00	0.00
15	1612	1171	711	385	211	128	85.2	59.8	43.0	30.6	20.4	11.5	3.65	0.00	0.00	0.00	0.00	0.00
20	840	577	354	213	134	89.8	63.4	46.0	33.3	22.8	13.9	5.92	0.00	0.00	0.00	0.00	0.00	0.00
25	633	491	335	215	140	94.8	67.7	49.6	36.4	26.0	17.0	9.01	1.74	0.00	0.00	0.00	0.00	0.00
30	269	214	161	118	86.6	64.5	48.6	36.5	26.6	18.1	10.3	3.29	0.00	0.00	0.00	0.00	0.00	0.00
35	204	175	140	107	81.7	62.4	47.9	36.6	27.4	19.3	12.0	5.21	0.31	0.00	0.00	0.00	0.00	0.00
40	106	93.1	78.5	64.5	52.4	42.0	33.1	25.2	18.1	11.5	5.50	0.02	0.00	0.00	0.00	0.00	0.00	0.00
45	82.1	75.1	65.7	55.8	46.5	38.1	30.7	23.9	17.7	11.9	6.36	1.48	0.00	0.00	0.00	0.00	0.00	0.00
50	50.4	46.2	41.1	35.8	30.3	25.1	20.0	15.0	10.2	5.51	0.52	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	37.7	35.3	32.0	28.2	24.3	20.4	16.6	12.7	8.70	4.53	1.78	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	22.4	20.6	18.4	16.0	13.6	11.1	8.48	5.60	2.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	12.8	11.9	10.6	9.20	7.71	6.30	5.02	3.70	2.15	0.36	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	2.24	1.70	1.16	0.63	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	1.22	1.02	0.73	0.48	0.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

$H(\beta)$ Range:-90 - 90DEG
 $H(\beta)$ Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-12-29

$V(\beta)$ Range:-80 - 80DEG
 $V(\beta)$ Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks: