

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		3621.4 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	49.9V x 48.2H
	At 50% of Imax	24.5V x 22.7H
	At 90% of Imax	12.6V x 8.4H
Beam Flux	Total	999.8 lumens per klm.
	To 10% of Imax	734.3 lumens per klm.
	To 50% of Imax	365.4 lumens per klm.
	To 90% of Imax	76.7 lumens per klm.
Upward LOR		0.0 %
Downward LOR		100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-28

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.5V I:0.4461A P:34.54W PF:0.6428 Lamp Flux:1405.82x1 lm		
NAME: 8.03.007.0153 30°SP-DKP-F170-24P-RDM-AL-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120055
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

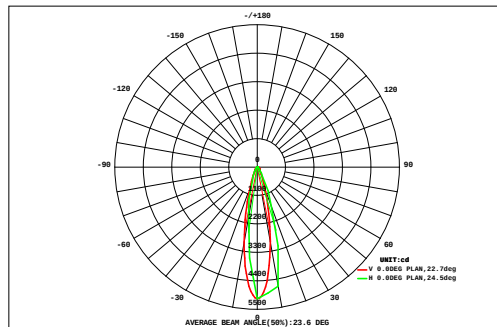

DATA OF LAMP		Eff:40.70lm/W	
MODEL	DKP-F170-24P-RDM-AL	Imax(cd)	5091
NOMINAL POWER(W)	34	AVAILABILITY(%)	73.7
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	1036
NOMINAL FLUX(lm)	1405.82	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1406
TEST VOLTAGE(V)	120.5	θ @50%(H,V)	23, 25DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.29	0.38	0.48	0.59	0.71	0.84	0.96	1.06	1.13	1.14	1.09	1.00	0.89	0.76	0.64	0.52	0.41	0.32	13.2	0.00
45	0.34	0.44	0.57	0.70	0.86	1.02	1.18	1.32	1.41	1.43	1.37	1.25	1.09	0.93	0.77	0.62	0.49	0.37	16.2	0.00
40	0.39	0.52	0.68	0.90	1.17	1.53	1.95	2.37	2.65	2.68	2.46	2.09	1.67	1.31	1.02	0.78	0.59	0.44	25.2	0.00
35	0.44	0.59	0.79	1.06	1.43	1.92	2.54	3.15	3.57	3.62	3.28	2.73	2.13	1.62	1.22	0.91	0.68	0.50	32.2	1.43
30	0.48	0.67	0.94	1.36	2.10	3.35	5.35	7.88	9.74	9.68	7.85	5.52	3.64	2.40	1.62	1.13	0.79	0.56	65.1	48.8
25	0.53	0.75	1.08	1.62	2.64	4.44	7.42	11.3	14.2	14.0	11.2	7.59	4.80	3.02	1.95	1.31	0.90	0.62	89.3	74.5
20	0.56	0.80	1.19	1.90	3.40	6.70	13.4	22.4	28.9	28.2	21.3	13.1	7.18	3.98	2.36	1.48	0.98	0.66	158	146
15	0.59	0.86	1.31	2.18	4.09	8.58	18.0	31.0	40.3	39.2	29.1	17.4	9.16	4.83	2.74	1.65	1.07	0.71	213	201
10	0.58	0.85	1.28	2.13	3.95	8.13	16.4	27.6	36.4	36.3	27.1	16.3	8.69	4.64	2.66	1.63	1.06	0.70	196	184
5	0.59	0.86	1.30	2.18	4.08	8.46	16.9	28.2	37.5	38.0	28.4	17.0	9.04	4.79	2.73	1.67	1.08	0.71	204	191
0	0.54	0.78	1.15	1.79	3.01	5.47	9.86	15.6	20.0	20.2	16.0	10.5	6.23	3.68	2.26	1.45	0.97	0.66	120	107
-5	0.51	0.73	1.05	1.54	2.35	3.59	5.31	7.35	8.75	8.96	8.12	6.35	4.47	2.99	1.98	1.32	0.90	0.63	66.9	50.1
-10	0.46	0.64	0.89	1.26	1.83	2.73	4.06	5.60	6.75	6.89	5.97	4.56	3.23	2.24	1.56	1.09	0.77	0.55	51.1	32.6
-15	0.41	0.56	0.75	0.98	1.26	1.54	1.71	1.70	1.73	1.81	1.92	1.99	1.82	1.52	1.19	0.90	0.67	0.50	22.9	0.00
-20	0.35	0.48	0.63	0.83	1.08	1.38	1.73	2.07	2.30	2.36	2.21	1.92	1.58	1.25	0.97	0.75	0.57	0.43	22.9	0.00
-25	0.30	0.40	0.51	0.64	0.77	0.88	0.97	1.02	1.04	1.05	1.05	1.01	0.94	0.83	0.71	0.59	0.47	0.36	13.5	0.00
-30	0.25	0.33	0.42	0.52	0.64	0.76	0.87	0.97	1.03	1.05	1.01	0.93	0.82	0.71	0.59	0.48	0.38	0.28	12.0	0.00
-35	0.20	0.26	0.32	0.38	0.45	0.50	0.55	0.58	0.60	0.61	0.59	0.57	0.53	0.48	0.42	0.36	0.28	0.21	7.89	0.00
-40	0.20	0.26	0.32	0.38	0.45	0.50	0.55	0.58	0.60	0.61	0.59	0.57	0.53	0.48	0.42	0.36	0.28	0.21	7.89	0.00
-45	0.20	0.26	0.32	0.38	0.45	0.50	0.55	0.58	0.60	0.61	0.59	0.57	0.53	0.48	0.42	0.36	0.28	0.21	7.89	0.00
-45 -40 -35 -30 -25 -20 -15 -10 HORIZONTAL(DEG) 10 15 20 25 30 35 40 45																				
Φ t	7.79	10.9	15.3	22.6	35.8	61.8	109	171	218	217	170	112	67.9	42.0	27.4	18.6	13.1	9.20	1330	---
Φ a	0.00	0.00	0.00	0.00	10.8	44.1	94.7	157	203	202	155	97.6	51.5	19.8	0.14	0.00	0.00	0.00	---	1036

one-half-peak spread: U:7.9,D:16.8 , L:11.5,R:11.4


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-12-28

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.5V I:0.4461A P:34.54W PF:0.6428 Lamp Flux:1405.82x1 lm		
NAME: 8.03.007.0153 30°SP-DKP-F170-24P-RDM-AL-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120055
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

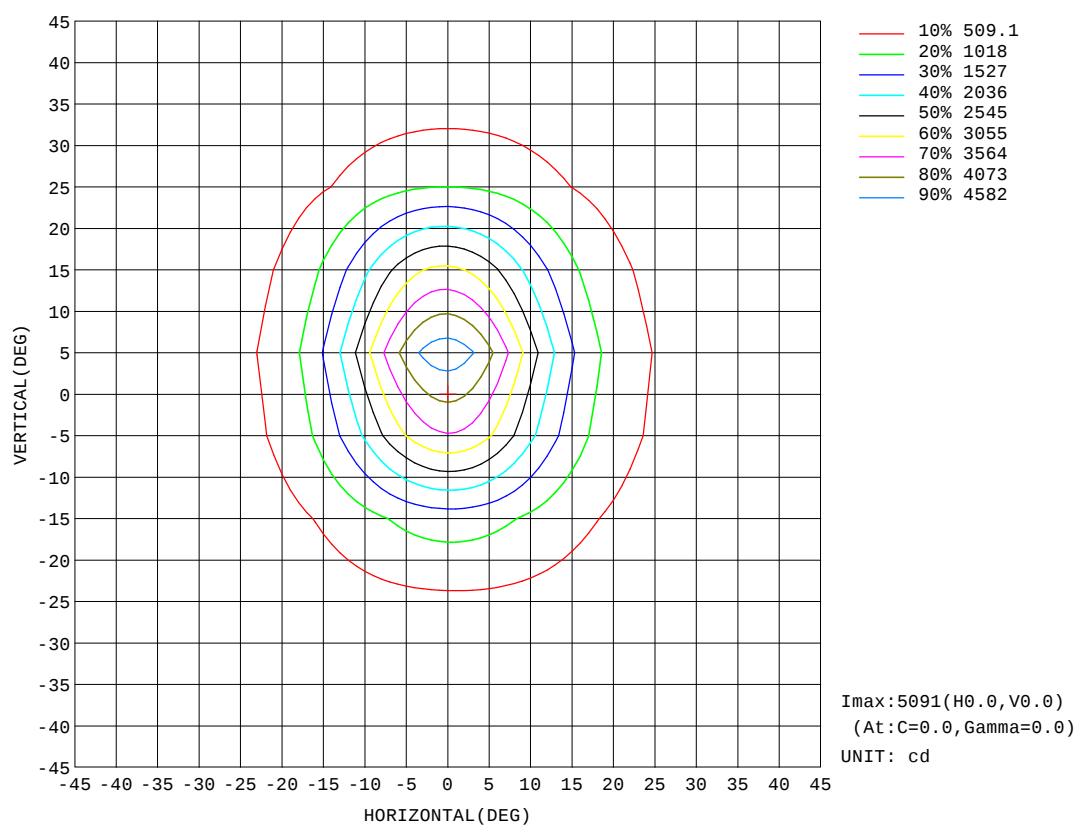


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-28

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.5V I:0.4461A P:34.54W PF:0.6428 Lamp Flux:1405.82x1 lm		
NAME: 8.03.007.0153 30°SP-DKP-F170-24P-RDM-AL-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120055
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

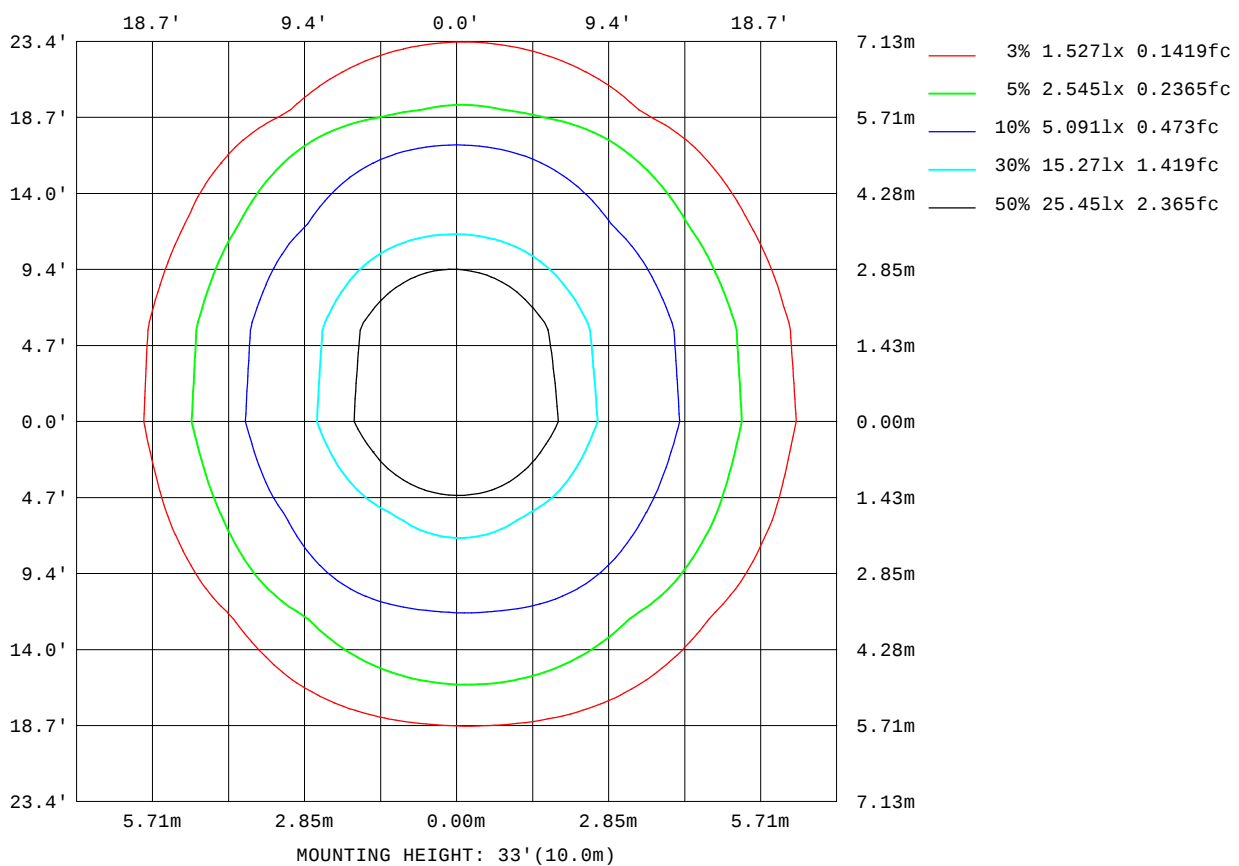


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-28

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.5V I:0.4461A P:34.54W PF:0.6428 Lamp Flux:1405.82x1 lm		
NAME: 8.03.007.0153 30°SP-DKP-F170-24P-RDM-AL-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120055
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

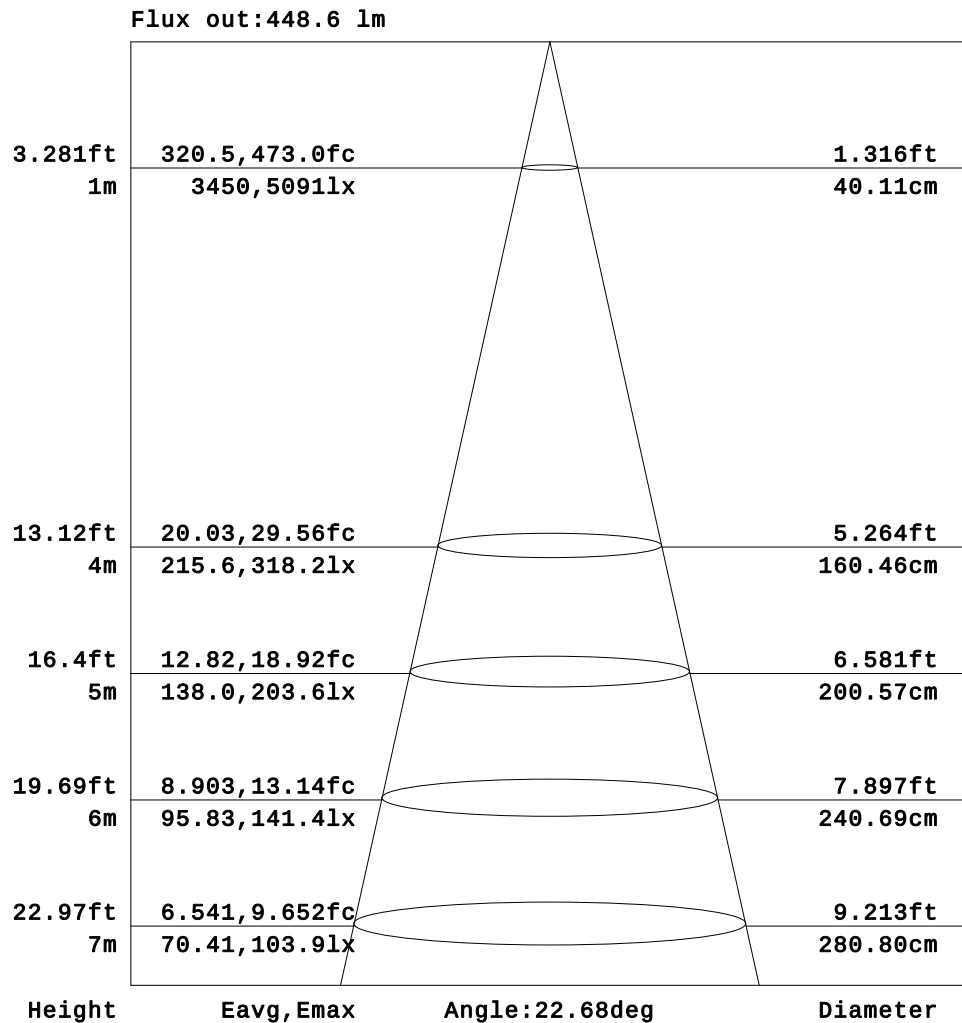


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-28

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

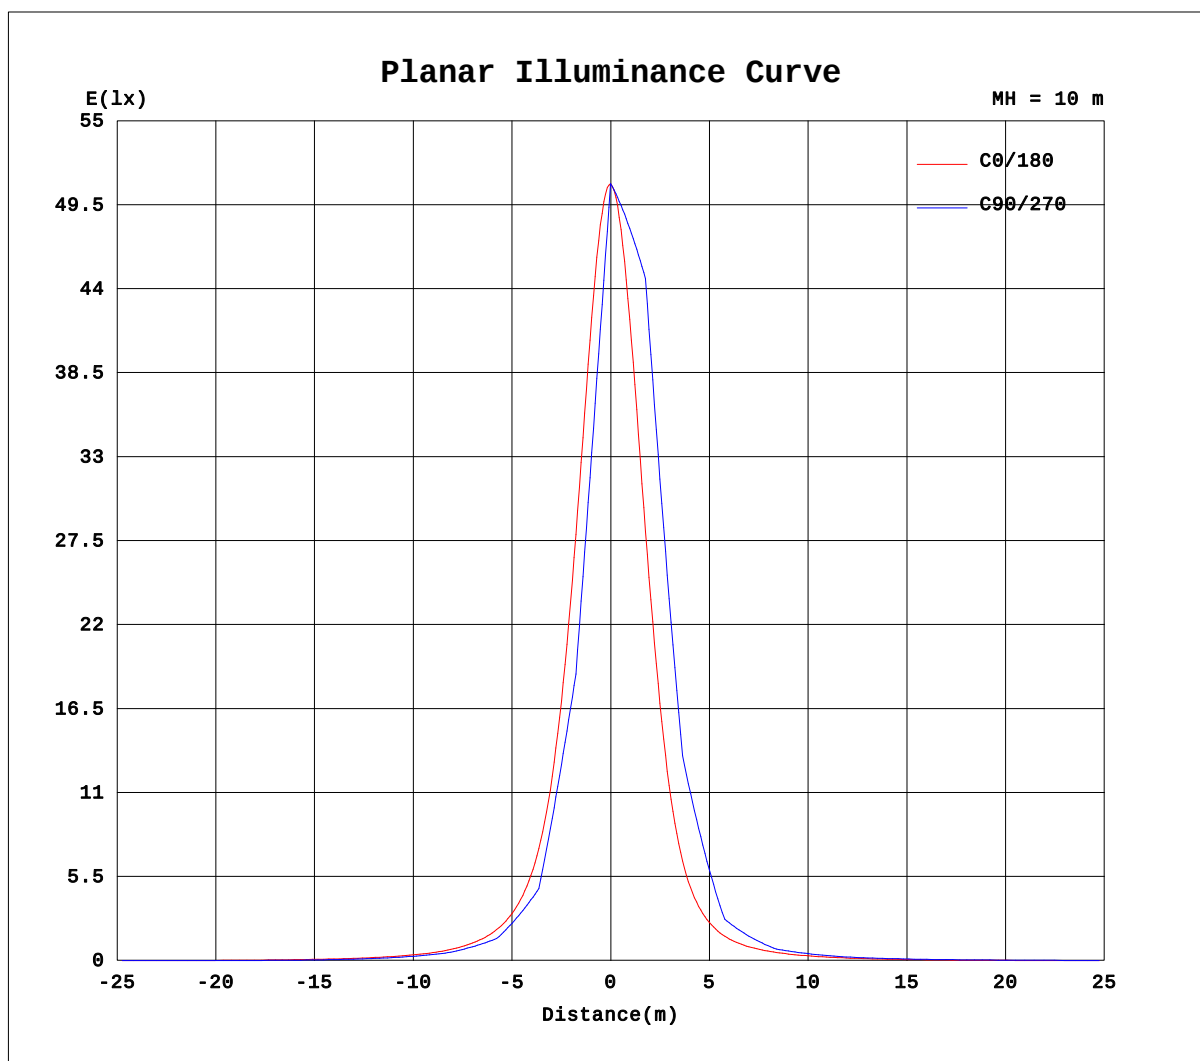

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-28

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.5V I:0.4461A P:34.54W PF:0.6428 Lamp Flux:1405.82x1 lm		
NAME: 8.03.007.0153 30°SP-DKP-F170-24P-RDM-AL-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120055
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.17	2.82	4.24	5.57	6.53	7.12	7.57	8.08	8.44	8.54
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.35	5.65	8.48	11.1	13.1	14.2	15.1	16.2	16.9	17.1
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.05	3.05	6.48	11.0	15.7	19.6	23.1	26.2	28.9	31.3	33.7	35.4	36.2
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.10	6.09	13.0	19.7	25.7	30.6	35.1	39.4	43.5	47.5	51.2	53.9	55.3
-45	0.00	0.00	0.00	0.00	0.00	0.43	4.60	12.4	20.2	27.6	34.8	41.7	48.6	55.6	62.7	69.5	75.4	79.7	81.9
-40	0.00	0.00	0.00	0.00	0.00	0.86	9.11	18.8	27.4	35.4	43.9	52.7	62.0	71.8	81.9	91.4	99.6	106	109
-35	0.00	0.00	0.00	0.00	0.00	3.82	13.6	23.8	33.5	43.4	54.3	66.5	80.1	95.5	112	130	147	160	166
-30	0.00	0.00	0.00	0.00	0.00	6.77	18.1	28.9	39.7	51.3	64.8	80.4	98.2	119	143	169	194	213	224
-25	0.00	0.00	0.00	0.00	0.93	9.78	21.7	33.3	45.6	59.6	76.1	96.3	121	154	198	254	315	369	397
-20	0.00	0.00	0.00	0.00	1.87	12.8	25.3	37.8	51.6	67.8	87.3	112	145	190	253	340	436	524	569
-15	0.00	0.00	0.00	0.00	3.20	15.0	27.9	41.2	56.5	74.7	97.4	129	173	246	367	568	851	1135	1268
-10	0.00	0.00	0.00	0.00	4.54	17.2	30.5	44.6	61.3	81.5	107	145	202	301	481	797	1266	1745	1966
-5	0.00	0.00	0.00	0.00	5.42	18.5	32.0	46.6	64.2	85.6	114	155	224	358	634	1204	2106	3066	3528
0	0.00	0.00	0.00	0.00	6.30	19.8	33.5	48.7	67.1	89.8	120	166	247	415	788	1611	2945	4388	5091
5	0.00	0.00	0.00	0.00	6.24	19.6	33.2	48.3	66.5	88.8	119	164	242	403	758	1555	2878	4281	4885
10	0.00	0.00	0.00	0.00	6.18	19.4	33.0	47.9	66.0	87.8	117	162	237	391	727	1500	2810	4175	4678
15	0.00	0.00	0.00	0.00	5.62	18.6	31.8	46.1	63.1	83.5	110	148	210	329	574	1088	1936	2816	3148
20	0.00	0.00	0.00	0.00	5.06	17.7	30.7	44.3	60.2	79.2	103	135	184	267	421	676	1062	1456	1618
25	0.00	0.00	0.00	0.00	3.62	15.3	28.0	40.7	55.0	72.0	92.4	119	156	215	315	472	698	924	1018
30	0.00	0.00	0.00	0.00	2.18	13.0	25.4	37.2	49.9	64.8	81.9	103	128	163	209	268	335	392	418
35	0.00	0.00	0.00	0.00	1.09	10.4	22.3	33.4	44.8	57.4	71.7	88.7	108	133	164	202	243	277	293
40	0.00	0.00	0.00	0.00	0.00	7.84	19.1	29.7	39.6	50.0	61.6	74.7	88.5	104	120	136	151	163	169
45	0.00	0.00	0.00	0.00	0.00	4.71	14.5	24.8	34.2	43.1	52.6	62.9	73.6	85.0	96.9	108	119	127	131
50	0.00	0.00	0.00	0.00	0.00	1.59	9.85	20.0	28.7	36.3	43.5	51.1	58.7	66.4	73.9	80.8	86.6	90.8	92.9
55	0.00	0.00	0.00	0.00	0.00	0.79	5.90	14.1	22.0	29.3	35.9	42.0	47.8	53.4	58.6	63.4	67.4	70.4	71.8
60	0.00	0.00	0.00	0.00	0.00	0.00	1.94	8.18	15.3	22.3	28.3	33.0	36.8	40.3	43.4	46.0	48.3	50.0	50.7
65	0.00	0.00	0.00	0.00	0.00	0.00	0.97	4.09	8.61	14.2	18.9	22.6	26.0	29.0	31.2	32.8	34.0	35.1	35.5
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.94	6.00	9.53	12.2	15.2	17.7	19.0	19.6	19.8	20.2	20.2
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.97	3.00	4.76	6.11	7.60	8.85	9.51	9.79	9.88	10.1	10.1
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-12-28

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.5V I:0.4461A P:34.54W PF:0.6428 Lamp Flux:1405.82x1 lm		
NAME: 8.03.007.0153 30°SP-DKP-F170-24P-RDM-AL-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120055
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	8.34	7.86	7.23	6.69	6.20	5.43	4.19	2.66	0.81	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	16.7	15.7	14.5	13.4	12.4	10.9	8.38	5.32	1.61	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	35.9	34.6	32.5	30.1	27.4	24.3	20.4	16.1	11.0	6.65	3.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	55.1	53.5	50.6	46.7	42.4	37.6	32.5	26.9	20.5	13.3	6.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	81.5	78.5	73.7	67.7	61.1	54.0	46.4	38.2	29.5	20.5	11.7	3.63	0.00	0.00	0.00	0.00	0.00	0.00
-40	108	103	96.7	88.7	79.8	70.3	60.3	49.5	38.4	27.7	17.4	7.25	0.01	0.00	0.00	0.00	0.00	0.00
-35	165	156	141	125	108	92.0	77.6	63.8	50.1	36.5	23.8	12.0	2.44	0.00	0.00	0.00	0.00	0.00
-30	222	208	186	160	136	114	94.8	78.1	61.8	45.4	30.1	16.7	4.87	0.00	0.00	0.00	0.00	0.00
-25	387	346	290	233	184	146	115	91.6	72.1	53.8	36.3	21.0	7.87	0.07	0.00	0.00	0.00	0.00
-20	553	485	394	305	233	177	135	105	82.4	62.2	42.5	25.3	10.9	0.15	0.00	0.00	0.00	0.00
-15	1176	926	654	445	307	217	158	118	90.8	68.5	47.5	28.9	13.4	1.55	0.00	0.00	0.00	0.00
-10	1799	1366	914	586	382	257	181	132	99.1	74.8	52.5	32.5	15.9	2.95	0.00	0.00	0.00	0.00
-5	3103	2144	1283	736	443	285	195	139	103	77.3	54.5	34.0	17.0	3.55	0.00	0.00	0.00	0.00
0	4406	2923	1652	886	505	314	210	147	107	79.9	56.6	35.5	18.1	4.14	0.00	0.00	0.00	0.00
5	4198	2796	1584	855	491	307	205	145	106	79.3	56.4	35.6	18.2	4.25	0.00	0.00	0.00	0.00
10	3989	2669	1516	823	476	299	201	142	105	78.7	56.1	35.6	18.3	4.36	0.00	0.00	0.00	0.00
15	2714	1867	1115	646	396	261	182	131	98.2	74.2	52.8	33.3	16.9	3.45	0.00	0.00	0.00	0.00
20	1438	1065	713	468	315	222	162	120	91.6	69.8	49.4	30.9	15.5	2.55	0.00	0.00	0.00	0.00
25	920	710	503	351	251	185	140	107	82.9	63.4	44.8	28.0	13.3	1.47	0.00	0.00	0.00	0.00
30	402	355	292	234	186	147	117	93.7	74.3	57.0	40.2	25.0	11.1	0.39	0.00	0.00	0.00	0.00
35	285	256	218	181	149	122	99.5	80.8	64.5	49.4	34.8	21.1	8.17	0.19	0.00	0.00	0.00	0.00
40	167	158	144	129	112	96.4	81.7	67.8	54.8	41.9	29.3	17.1	5.23	0.00	0.00	0.00	0.00	0.00
45	129	123	114	103	91.0	79.3	68.0	56.9	46.0	35.1	24.1	12.8	2.80	0.00	0.00	0.00	0.00	0.00
50	92.1	88.9	83.5	77.1	69.8	62.2	54.3	45.9	37.2	28.3	18.9	8.46	0.38	0.00	0.00	0.00	0.00	0.00
55	71.1	68.7	64.7	59.9	54.6	49.0	43.0	36.4	29.0	20.9	12.7	4.58	0.19	0.00	0.00	0.00	0.00	0.00
60	50.2	48.4	45.8	42.6	39.4	35.8	31.6	26.9	20.8	13.5	6.59	0.70	0.00	0.00	0.00	0.00	0.00	0.00
65	35.0	33.7	31.7	29.4	27.1	24.3	20.9	17.2	12.5	6.81	3.30	0.35	0.00	0.00	0.00	0.00	0.00	0.00
70	19.8	18.9	17.5	16.2	14.8	12.8	10.1	7.49	4.26	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	9.92	9.44	8.76	8.12	7.42	6.40	5.06	3.75	2.13	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-12-28

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks: