

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	3453.6 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	50.5V x 48.8H
	At 50% of Imax	25.0V x 22.9H
	At 90% of Imax	13.6V x 8.6H

Beam Flux	Total	999.8 lumens per klm.
	To 10% of Imax	731.2 lumens per klm.
	To 50% of Imax	371.5 lumens per klm.
	To 90% of Imax	95.8 lumens per klm.

Upward LOR	0.0 %
Downward LOR	100.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-29

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:277.5V I:0.2144A P:35.46W PF:0.5958 Lamp Flux:1621.88x1 lm		
NAME: 8.03.007.0153 30°SP-DKP-F170-24P-RDM-AL-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120060
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

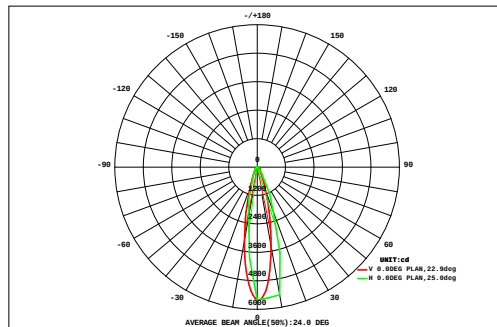

DATA OF LAMP		Eff:45.74lm/W	
MODEL	DKP-F170-24P-RDM-AL	Imax(cd)	5601
NOMINAL POWER(W)	36	AVAILABILITY(%)	73.4
RATED VOLTAGE(V)	277	Avai. FLUX(lm)	1191
NOMINAL FLUX(lm)	1621.88	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1622
TEST VOLTAGE(V)	277.5	θ @50%(H,V)	23,25DEG

		AREA FLUX DIAGRAM															UNIT:lm				Φ t	Φ a
VERTICAL (DEG)	45	0.36	0.47	0.59	0.73	0.87	1.03	1.18	1.30	1.39	1.41	1.36	1.25	1.10	0.95	0.80	0.65	0.52	0.40	16.4	0.00	
	40	0.41	0.54	0.69	0.86	1.04	1.24	1.44	1.62	1.73	1.76	1.69	1.54	1.35	1.15	0.95	0.77	0.61	0.47	19.9	0.00	
	35	0.47	0.62	0.82	1.07	1.40	1.83	2.36	2.89	3.26	3.33	3.07	2.60	2.09	1.63	1.26	0.96	0.73	0.55	30.9	0.00	
	30	0.52	0.70	0.94	1.26	1.69	2.30	3.06	3.84	4.40	4.50	4.10	3.40	2.67	2.01	1.51	1.13	0.84	0.62	39.5	8.44	
	25	0.57	0.79	1.10	1.59	2.43	3.91	6.32	9.47	11.9	12.0	9.86	6.93	4.55	2.97	1.99	1.38	0.97	0.69	79.5	61.7	
	20	0.62	0.87	1.25	1.87	3.03	5.14	8.73	13.5	17.3	17.4	14.0	9.55	5.99	3.73	2.40	1.60	1.10	0.76	109	93.1	
	15	0.64	0.92	1.36	2.15	3.80	7.49	15.0	25.5	33.6	33.6	25.9	16.1	8.86	4.88	2.87	1.80	1.18	0.80	186	172	
	10	0.67	0.98	1.48	2.43	4.51	9.46	20.0	34.9	46.3	46.1	35.2	21.3	11.2	5.90	3.32	2.00	1.28	0.86	248	235	
	5	0.66	0.96	1.43	2.34	4.28	8.72	17.6	30.0	40.2	41.0	31.5	19.3	10.4	5.56	3.17	1.94	1.26	0.84	221	208	
	0	0.67	0.97	1.44	2.38	4.36	8.88	17.8	29.9	40.3	41.8	32.2	19.7	10.6	5.67	3.22	1.97	1.27	0.84	224	211	
	-5	0.61	0.87	1.27	1.95	3.23	5.78	10.4	16.5	21.5	22.2	17.9	12.0	7.24	4.30	2.66	1.71	1.14	0.78	132	117	
	-10	0.58	0.82	1.16	1.67	2.50	3.77	5.47	7.48	8.97	9.34	8.65	7.00	5.05	3.43	2.30	1.54	1.06	0.74	71.5	50.9	
	-15	0.52	0.72	0.99	1.38	1.98	2.94	4.32	5.95	7.22	7.47	6.59	5.11	3.68	2.57	1.81	1.27	0.91	0.65	56.1	34.9	
	-20	0.47	0.64	0.84	1.10	1.39	1.72	1.92	1.92	1.93	2.00	2.11	2.19	2.03	1.71	1.36	1.04	0.78	0.58	25.7	0.00	
	-25	0.40	0.54	0.72	0.93	1.19	1.53	1.90	2.27	2.54	2.61	2.47	2.16	1.80	1.44	1.13	0.88	0.67	0.51	25.7	0.00	
	-30	0.34	0.46	0.58	0.72	0.86	0.99	1.10	1.16	1.19	1.21	1.21	1.17	1.09	0.97	0.83	0.69	0.56	0.43	15.6	0.00	
-35	0.29	0.39	0.49	0.60	0.73	0.86	0.99	1.11	1.18	1.20	1.16	1.08	0.96	0.83	0.70	0.58	0.46	0.35	14.0	0.00		
-40	0.24	0.31	0.38	0.46	0.53	0.60	0.66	0.70	0.72	0.73	0.71	0.68	0.64	0.59	0.52	0.44	0.35	0.27	9.53	0.00		
-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)				10	15	20	25	30	35	40	45			
Φ t	9.06	12.6	17.5	25.5	39.8	68.2	120	190	246	250	200	133	81.4	50.3	32.8	22.4	15.7	11.1	1525	---		
Φ a	0.00	0.00	0.00	0.00	11.5	48.2	103	173	229	234	183	116	63.7	26.8	2.22	0.00	0.00	0.00	---	1191		

one-half-peak spread: U:7.8,D:17.4 , L:12.2,R:11.0


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-12-29

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:277.5V I:0.2144A P:35.46W PF:0.5958 Lamp Flux:1621.88x1 lm		
NAME: 8.03.007.0153 30°SP-DKP-F170-24P-RDM-AL-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120060
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

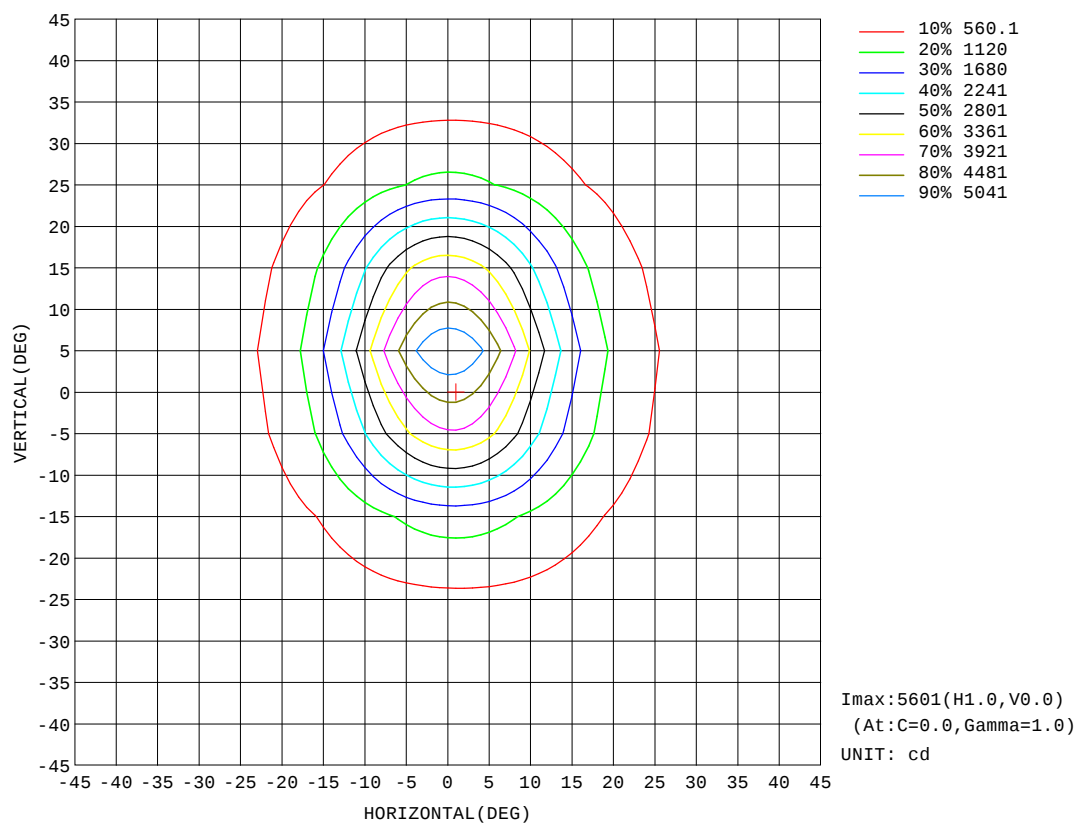


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-29

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:277.5V I:0.2144A P:35.46W PF:0.5958 Lamp Flux:1621.88x1 lm		
NAME: 8.03.007.0153 30°SP-DKP-F170-24P-RDM-AL-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120060
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

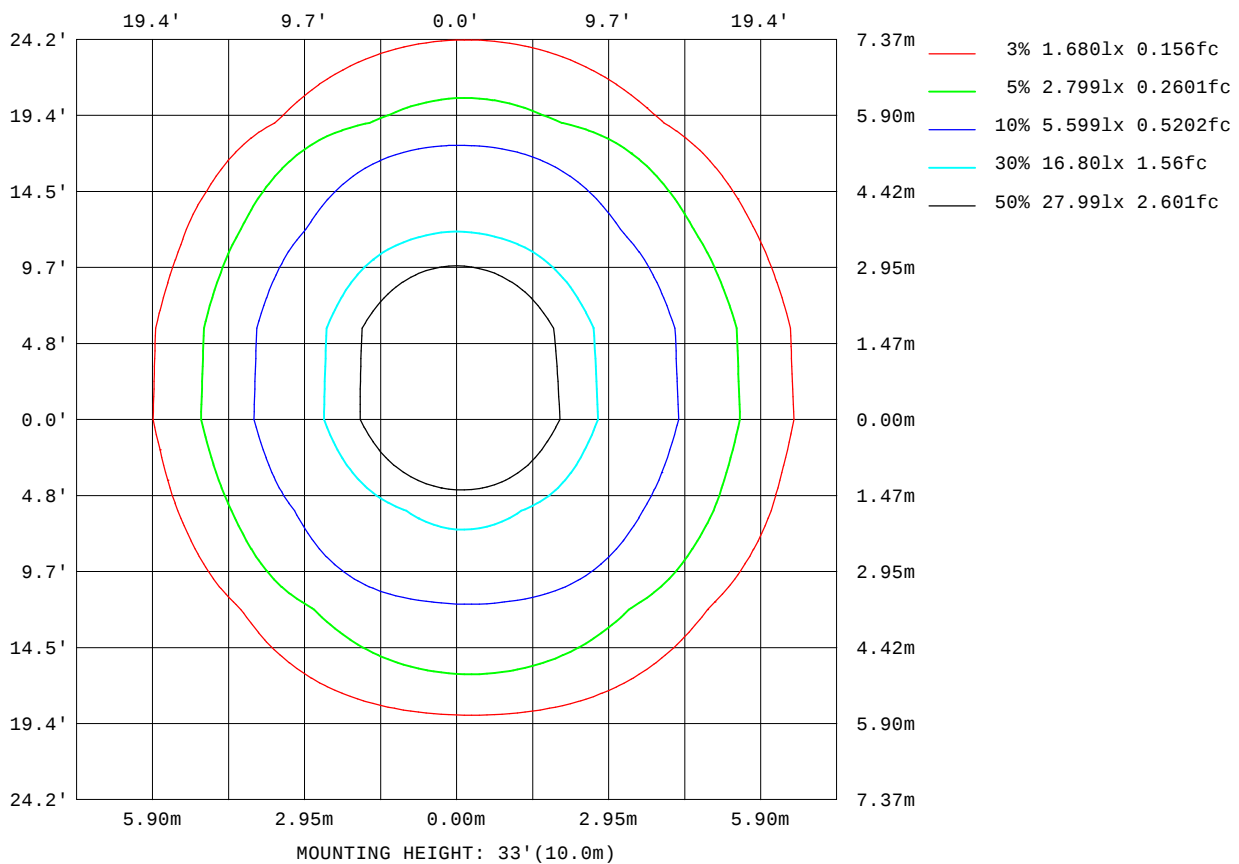


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-29

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:277.5V I:0.2144A P:35.46W PF:0.5958 Lamp Flux:1621.88x1 lm		
NAME: 8.03.007.0153 30°SP-DKP-F170-24P-RDM-AL-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120060
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

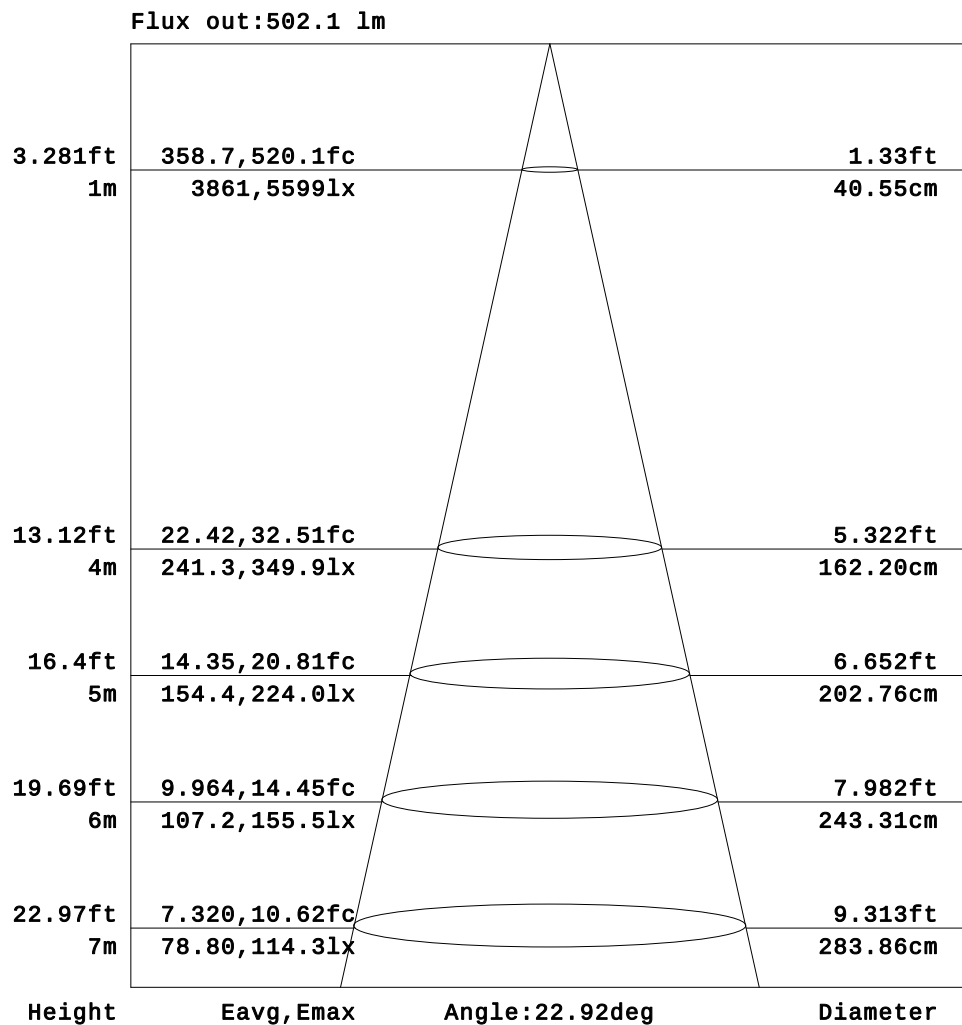


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-29

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

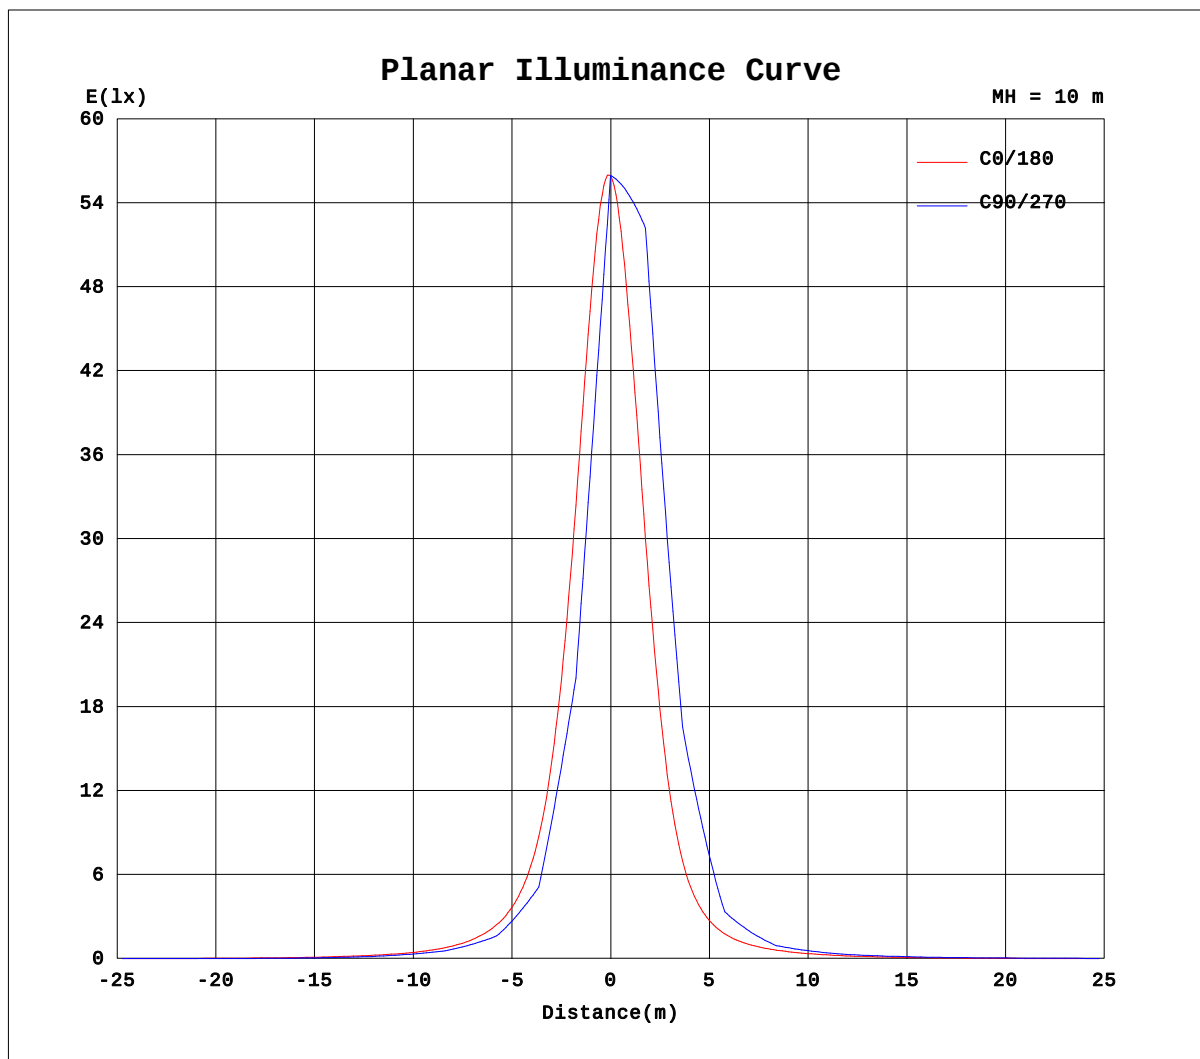

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2023-12-29

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.5V I:0.2144A P:35.46W PF:0.5958 Lamp Flux:1621.88x1 lm																	
NAME: 8.03.007.0153 30°SP-DKP-F170-24P-RDM-AL-R TYPE:LED												WEIGHT:					
DIM.:									SPEC.:			SERIAL No.:2023120060					
MFR.: TPK OPTOELECTRONIC TECH CO., LTD									SUR.:			PROTECTION ANGLE:					

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.96	3.08	4.95	6.57	8.12	9.12	9.66	9.93	10.3	10.7	10.8
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.92	6.15	9.90	13.1	16.2	18.2	19.3	19.9	20.6	21.3	21.5
-55	0.00	0.00	0.00	0.00	0.00	0.00	1.50	4.88	9.75	15.7	21.0	25.5	29.6	32.9	35.6	37.9	40.2	42.0	42.8
-50	0.00	0.00	0.00	0.00	0.00	0.00	3.00	9.76	17.6	25.2	32.1	37.9	42.9	47.5	51.9	55.9	59.9	62.7	64.2
-45	0.00	0.00	0.00	0.00	0.00	1.78	7.86	16.7	25.6	34.0	42.2	50.2	58.0	65.8	73.5	81.0	87.7	92.7	95.4
-40	0.00	0.00	0.00	0.00	0.00	3.55	12.7	23.7	33.6	42.8	52.3	62.5	73.1	84.0	95.2	106	116	123	127
-35	0.00	0.00	0.00	0.00	0.01	6.53	17.5	29.1	40.0	51.0	63.2	77.0	92.1	109	127	147	165	180	189
-30	0.00	0.00	0.00	0.00	0.02	9.50	22.4	34.4	46.3	59.2	74.2	91.5	111	134	159	188	215	238	250
-25	0.00	0.00	0.00	0.00	2.04	12.9	26.5	39.4	52.9	68.3	86.6	109	136	171	218	278	343	402	435
-20	0.00	0.00	0.00	0.00	4.07	16.2	30.6	44.3	59.5	77.5	99.0	126	161	209	276	368	471	566	619
-15	0.00	0.00	0.00	0.00	5.44	18.5	33.3	48.0	64.8	84.8	110	144	192	267	394	602	896	1199	1359
-10	0.00	0.00	0.00	0.00	6.82	20.8	36.0	51.7	70.0	92.1	121	161	222	324	511	835	1320	1831	2099
-5	0.00	0.00	0.00	0.00	7.88	22.4	38.0	54.3	73.7	97.4	129	174	247	387	676	1270	2229	3281	3848
0	0.00	0.00	0.00	0.00	8.95	24.1	40.0	56.9	77.4	103	136	186	272	450	841	1706	3138	4731	5597
5	0.00	0.00	0.00	0.00	8.86	24.1	39.9	56.8	77.1	102	135	185	270	443	824	1680	3145	4751	5531
10	0.00	0.00	0.00	0.00	8.78	24.0	39.9	56.8	76.9	102	134	184	267	435	806	1655	3152	4771	5465
15	0.00	0.00	0.00	0.00	8.21	23.1	38.8	55.1	74.3	97.5	127	171	240	374	646	1223	2206	3267	3731
20	0.00	0.00	0.00	0.00	7.63	22.2	37.8	53.5	71.7	93.4	121	157	213	313	486	790	1260	1763	1996
25	0.00	0.00	0.00	0.00	6.11	19.7	34.9	49.8	66.3	85.7	109	140	183	253	368	556	834	1122	1257
30	0.00	0.00	0.00	0.00	4.58	17.1	32.0	46.1	61.0	78.0	98.1	122	154	194	249	323	407	480	517
35	0.00	0.00	0.00	0.00	2.80	14.2	28.6	42.1	55.6	70.2	87.1	107	131	160	198	244	296	340	363
40	0.00	0.00	0.00	0.00	1.02	11.3	25.2	38.1	50.1	62.4	76.1	91.7	108	126	146	166	185	200	208
45	0.00	0.00	0.00	0.00	0.51	7.90	19.9	32.5	43.9	54.7	65.9	78.2	91.2	105	119	133	146	157	162
50	0.00	0.00	0.00	0.00	0.00	4.54	14.5	27.0	37.8	46.9	55.6	64.8	74.1	83.4	92.4	101	108	113	116
55	0.00	0.00	0.00	0.00	0.00	2.27	9.90	20.0	29.9	38.9	46.9	54.3	61.3	68.1	74.4	80.2	85.2	89.0	90.8
60	0.00	0.00	0.00	0.00	0.00	0.00	5.26	13.0	21.9	30.9	38.2	43.9	48.5	52.7	56.5	59.7	62.7	64.9	65.9
65	0.00	0.00	0.00	0.00	0.00	0.00	2.63	6.53	13.9	21.0	27.0	31.6	35.9	39.6	42.2	44.2	45.9	47.4	47.9
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	5.80	11.2	15.7	19.4	23.3	26.4	28.0	28.8	29.1	29.8	30.0
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	2.90	5.58	7.87	9.69	11.6	13.2	14.0	14.4	14.6	14.9	15.0
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-12-29

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.5V I:0.2144A P:35.46W PF:0.5958 Lamp Flux:1621.88x1 lm		
NAME: 8.03.007.0153 30°SP-DKP-F170-24P-RDM-AL-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2023120060
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	10.6	10.1	9.43	8.91	8.55	7.98	6.83	5.33	3.31	0.91	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	21.1	20.2	18.9	17.8	17.1	16.0	13.7	10.7	6.63	1.82	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	42.6	41.4	39.3	36.7	34.1	30.9	27.0	22.5	16.9	10.5	5.44	1.76	0.00	0.00	0.00	0.00	0.00	0.00
-50	64.1	62.6	59.6	55.6	51.0	45.9	40.3	34.3	27.2	19.1	10.9	3.52	0.00	0.00	0.00	0.00	0.00	0.00
-45	95.2	92.2	87.0	80.7	73.4	65.5	57.0	47.7	37.7	27.5	17.5	7.86	1.45	0.00	0.00	0.00	0.00	0.00
-40	126	122	114	106	95.9	85.2	73.6	61.0	48.3	35.9	24.0	12.2	2.90	0.00	0.00	0.00	0.00	0.00
-35	188	179	163	145	126	109	92.6	76.8	61.2	45.8	31.2	17.6	6.15	0.00	0.00	0.00	0.00	0.00
-30	249	235	212	185	157	133	112	92.6	74.2	55.7	38.3	23.1	9.40	0.00	0.00	0.00	0.00	0.00
-25	428	386	327	266	212	169	135	108	85.7	65.0	45.2	27.7	12.7	1.76	0.00	0.00	0.00	0.00
-20	607	538	441	347	266	205	158	123	97.3	74.4	52.1	32.3	16.1	3.53	0.00	0.00	0.00	0.00
-15	1285	1032	743	512	355	253	185	139	107	82.1	58.3	36.9	19.2	5.30	0.00	0.00	0.00	0.00
-10	1963	1526	1044	677	444	302	213	155	117	89.7	64.4	41.4	22.3	7.08	0.00	0.00	0.00	0.00
-5	3473	2460	1493	866	523	338	231	165	123	92.9	67.0	43.4	23.7	7.84	0.00	0.00	0.00	0.00
0	4983	3394	1943	1055	602	373	250	176	128	96.2	69.5	45.3	25.0	8.61	0.00	0.00	0.00	0.00
5	4874	3320	1904	1033	591	368	246	174	127	96.0	69.6	45.6	25.3	8.89	0.00	0.00	0.00	0.00
10	4766	3246	1866	1010	580	363	242	172	127	95.9	69.8	45.9	25.7	9.17	0.00	0.00	0.00	0.00
15	3282	2295	1380	796	484	317	220	160	120	91.1	66.2	43.5	24.1	8.23	0.00	0.00	0.00	0.00
20	1799	1343	894	582	389	272	198	148	112	86.3	62.6	41.0	22.6	7.29	0.00	0.00	0.00	0.00
25	1150	893	630	437	309	227	171	132	102	79.2	57.4	37.6	20.2	6.01	0.00	0.00	0.00	0.00
30	501	442	365	292	230	182	145	116	92.6	72.1	52.3	34.2	17.8	4.74	0.00	0.00	0.00	0.00
35	354	319	272	225	184	151	123	101	81.0	63.0	45.5	29.3	14.3	2.72	0.00	0.00	0.00	0.00
40	206	196	179	159	139	120	102	85.4	69.4	53.8	38.7	24.5	10.8	0.71	0.00	0.00	0.00	0.00
45	161	153	142	128	114	99.5	85.9	72.4	59.2	46.0	32.9	19.6	7.80	0.35	0.00	0.00	0.00	0.00
50	115	111	105	97.2	88.4	79.3	69.7	59.5	49.0	38.3	27.0	14.8	4.83	0.00	0.00	0.00	0.00	0.00
55	90.2	87.3	82.6	76.8	70.4	63.7	56.5	48.4	39.5	29.9	19.8	10.1	2.41	0.00	0.00	0.00	0.00	0.00
60	65.4	63.4	60.3	56.4	52.4	48.0	43.3	37.3	30.0	21.5	12.6	5.39	0.00	0.00	0.00	0.00	0.00	0.00
65	47.5	45.9	43.6	40.9	38.2	34.8	30.7	25.9	20.3	13.6	6.51	2.69	0.00	0.00	0.00	0.00	0.00	0.00
70	29.5	28.4	26.9	25.4	23.9	21.5	18.1	14.5	10.7	5.71	0.42	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	14.8	14.2	13.4	12.7	11.9	10.7	9.05	7.27	5.33	2.86	0.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:27.1DEG
 Operators:QC1
 Test Date:2023-12-29

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:61%
 Test Distance:8.300m [K=1.0000]
 Remarks: