

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		33069.5 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	17.3V x 11.8H
	At 50% of Imax	10.1V x 7.3H
	At 90% of Imax	3.8V x 1.3H
Beam Flux	Total	927.2 lumens per klm.
	To 10% of Imax	666.5 lumens per klm.
	To 50% of Imax	314.7 lumens per klm.
	To 90% of Imax	9.9 lumens per klm.
Upward LOR		0.0 %
Downward LOR		92.7 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-11

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.8V I:0.7043A P:149.4W PF:0.9649 Lamp Flux:11026.7x1 lm		
NAME: 8.03.004.0198 3°SP-F310A-40P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090056
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

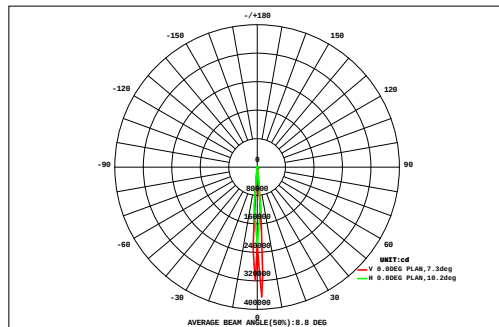

DATA OF LAMP		Eff:73.81lm/W	
MODEL	SP-F310A-40P-RDM	Imax(cd)	364648
NOMINAL POWER(W)	150	AVAILABILITY(%)	76.1
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	8386
NOMINAL FLUX(lm)	11026.7	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	11027
TEST VOLTAGE(V)	219.8	θ @50%(H,V)	7,10DEG

VERTICAL (DEG)	9	AREA FLUX DIAGRAM																UNIT: lm			Φ t	Φ a
	8	1.30	1.40	1.50	1.62	1.73	1.85	1.96	2.05	2.11	2.13	2.10	2.04	1.95	1.84	1.72	1.60	1.49	1.40	31.8	0.00	
	7	1.38	1.48	1.59	1.71	1.83	1.96	2.07	2.17	2.23	2.26	2.23	2.16	2.06	1.94	1.82	1.70	1.58	1.48	33.7	0.00	
	6	1.45	1.56	1.67	1.81	1.93	2.07	2.19	2.29	2.36	2.39	2.36	2.29	2.18	2.05	1.92	1.79	1.67	1.56	35.5	0.00	
	5	1.53	1.64	1.76	1.90	2.03	2.18	2.30	2.42	2.49	2.52	2.48	2.41	2.29	2.16	2.02	1.89	1.75	1.64	37.4	0.00	
	4	2.05	2.44	1.98	8.68	8.94	34.8	42.7	62.7	32.9	39.0	67.1	62.3	35.4	23.9	8.16	4.63	3.67	2.48	444	401	
	3	2.21	2.66	2.09	9.98	10.3	40.8	50.1	73.7	38.5	45.8	79.0	73.3	41.6	28.0	9.36	5.20	4.09	2.70	519	471	
	2	2.36	2.87	2.20	11.3	11.6	46.8	57.6	84.8	44.2	52.5	90.8	84.3	47.7	32.0	10.6	5.77	4.51	2.92	595	564	
	1	2.52	3.08	2.32	12.6	13.0	52.8	65.0	95.8	49.8	59.2	103	95.3	53.8	36.0	11.8	6.35	4.93	3.14	670	648	
	0	2.67	3.29	2.43	13.9	14.3	58.8	72.4	107	55.4	66.0	115	106	59.9	40.1	13.0	6.92	5.35	3.36	746	722	
	-1	2.83	3.51	2.54	15.2	15.6	64.9	79.9	118	61.1	72.7	126	117	66.1	44.1	14.2	7.50	5.76	3.58	821	795	
	-2	2.99	3.72	2.65	16.5	17.0	70.9	87.3	129	66.7	79.5	138	128	72.2	48.2	15.4	8.07	6.18	3.80	897	869	
	-3	3.14	3.93	2.76	17.8	18.3	76.9	94.7	140	72.3	86.2	150	139	78.3	52.2	16.6	8.65	6.60	4.02	972	943	
	-4	3.30	4.14	2.87	19.1	19.6	82.9	102	151	78.0	93.0	162	150	84.4	56.3	17.8	9.22	7.02	4.24	1047	1017	
	-5	3.46	4.35	2.98	20.4	21.0	88.9	110	162	83.6	99.7	174	161	90.6	60.3	19.0	9.80	7.44	4.46	1123	1090	
	-6	1.90	2.26	1.92	7.43	7.69	28.9	35.3	51.7	27.3	32.4	55.3	51.4	29.4	19.9	6.99	4.06	3.24	2.24	369	332	
	-7	1.75	2.05	1.82	6.14	6.37	22.9	27.9	40.7	21.7	25.6	43.5	40.4	23.3	15.9	5.80	3.49	2.82	2.02	294	262	
	-8	1.60	1.84	1.72	4.84	5.04	16.9	20.5	29.6	16.1	18.9	31.6	29.4	17.2	11.8	4.60	2.91	2.39	1.79	219	192	
	-9	1.44	1.63	1.61	3.55	3.72	10.9	13.1	18.6	10.5	12.2	19.8	18.4	11.0	7.81	3.41	2.34	1.97	1.57	144	82.1	
	-9	-8	-7	-6	-5	-4	-3	-2	HORIZONTAL (DEG)				2	3	4	5	6	7	8	9		
Φ t	39.9	47.8	38.4	175	180	706	867	1274	667	792	1364	1266	719	485	164	91.9	72.5	48.4	8998	---		
Φ a	0.00	0.00	0.00	127	130	687	858	1265	648	783	1355	1257	700	469	108	0.00	0.00	0.00	---	8386		

one-half-peak spread: U:5.1,D:5.1 , L:2.4,R:1.9


NEMA Beam Type: Type 1

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-11

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:219.8V I:0.7043A P:149.4W PF:0.9649 Lamp Flux:11026.7x1 lm		
NAME: 8.03.004.0198 3°SP-F310A-40P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090056
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

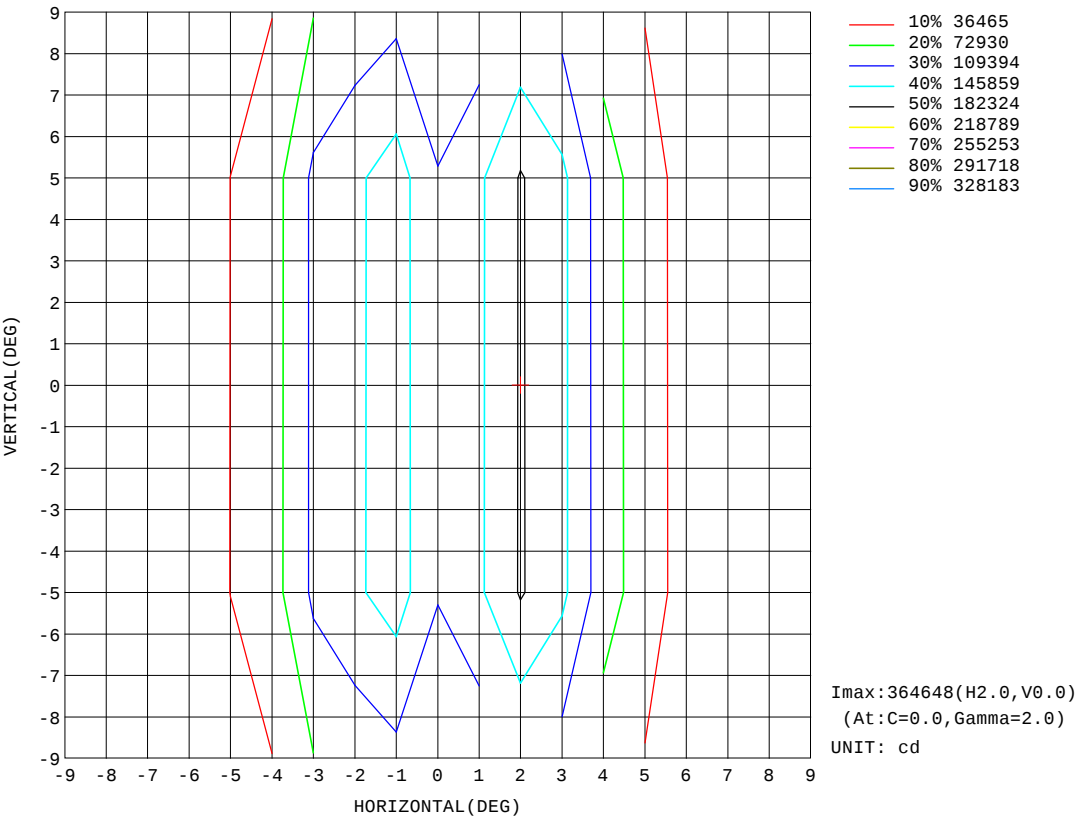


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-11

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:219.8V I:0.7043A P:149.4W PF:0.9649 Lamp Flux:11026.7x1 lm		
NAME: 8.03.004.0198 3°SP-F310A-40P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090056
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

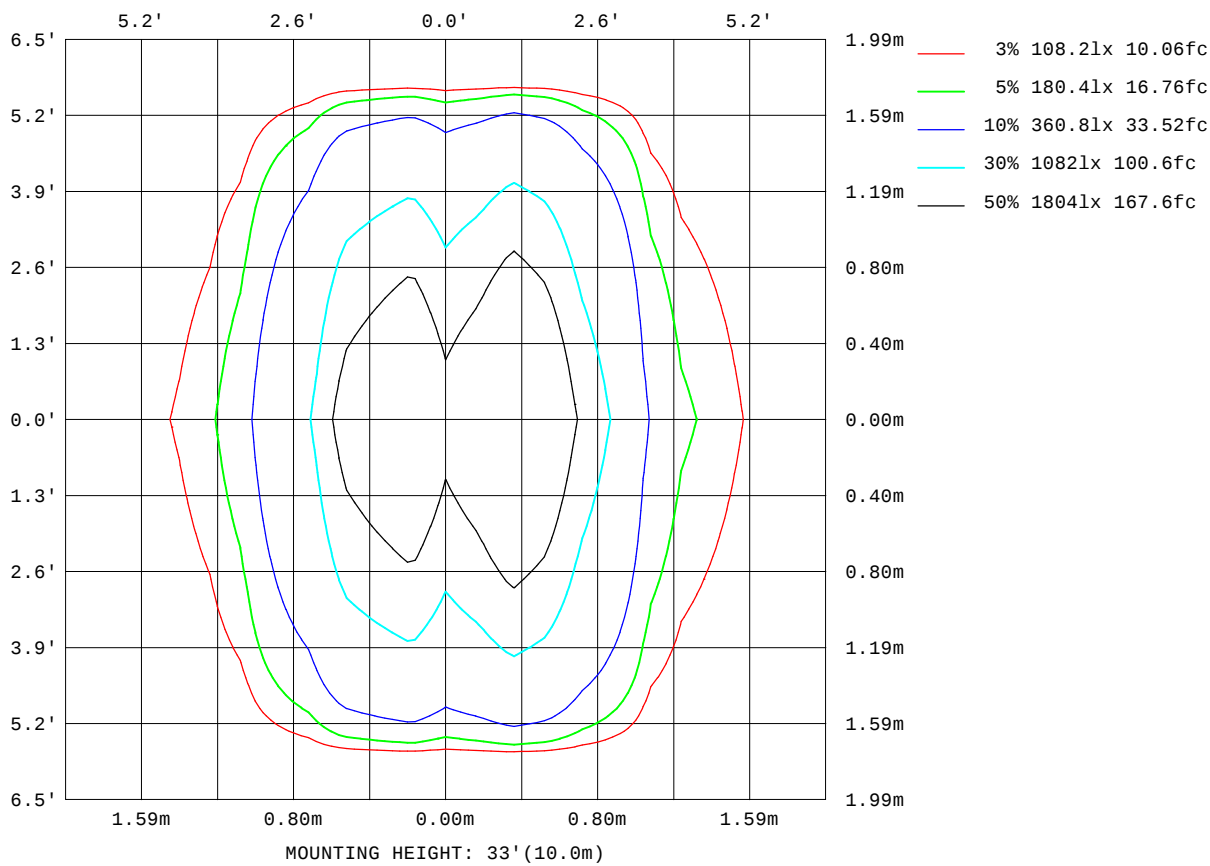


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-11

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:219.8V I:0.7043A P:149.4W PF:0.9649 Lamp Flux:11026.7x1 lm		
NAME: 8.03.004.0198 3°SP-F310A-40P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090056
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

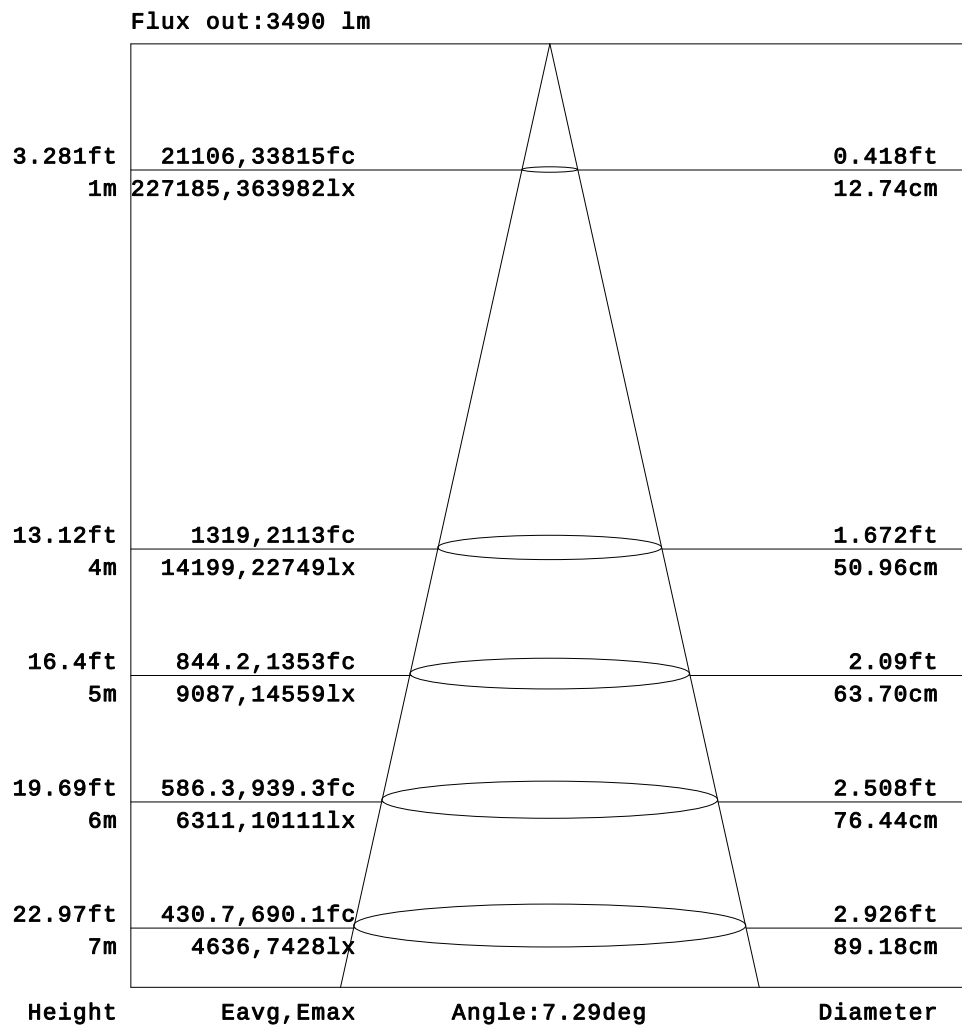


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-11

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

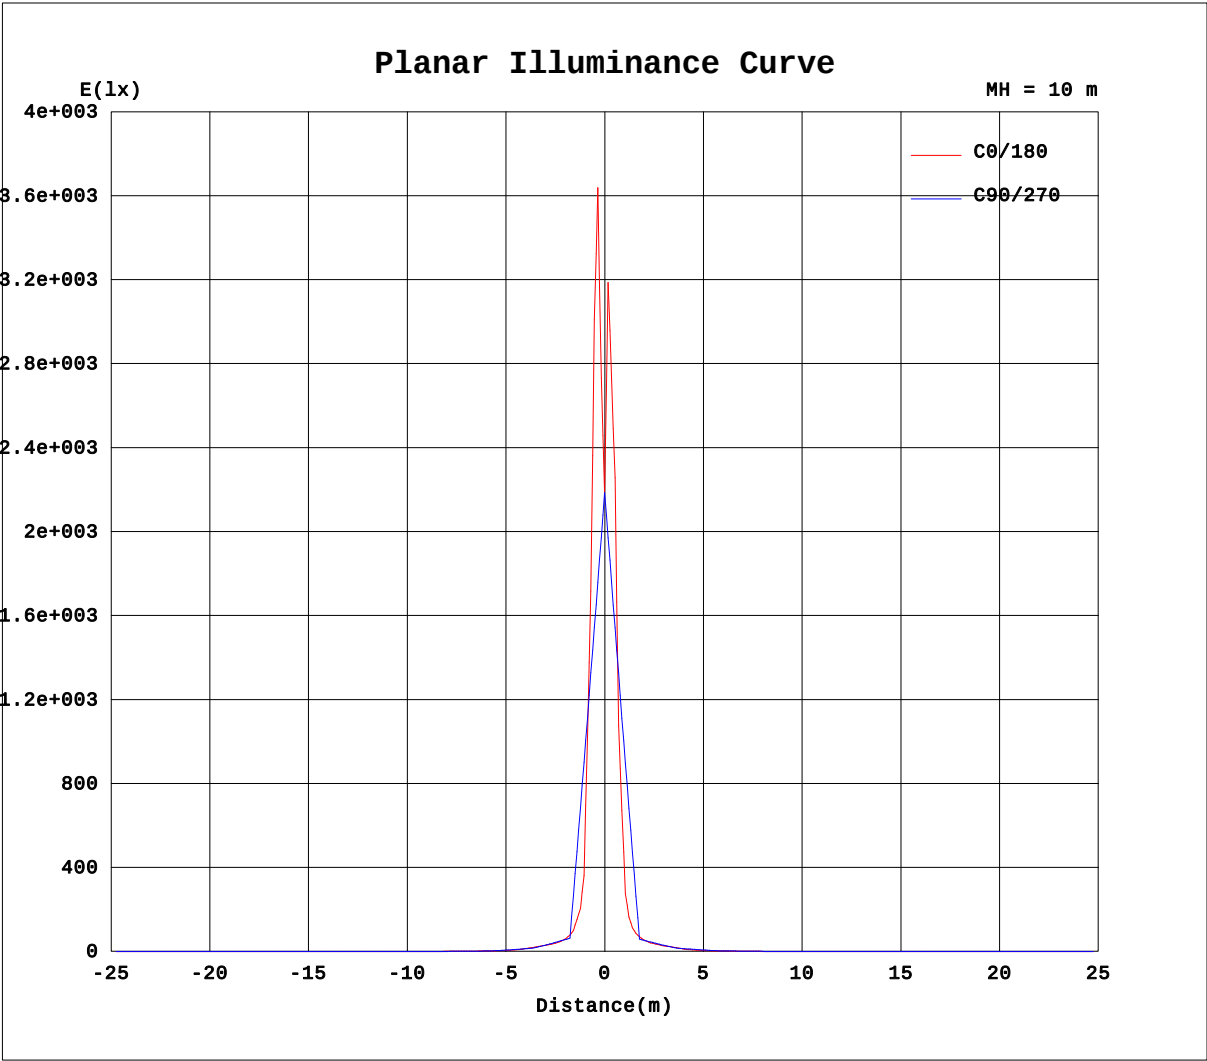

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-11

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.8V I:0.7043A P:149.4W PF:0.9649 Lamp Flux:11026.7x1 lm		
NAME: 8.03.004.0198 3°SP-F310A-40P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090056
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: ×100cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.03	0.06	0.08	0.10	0.12	0.14	0.15	0.16	0.17
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.06	0.12	0.16	0.19	0.24	0.29	0.31	0.33	0.35
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.07	0.11	0.16	0.22	0.29	0.36	0.42	0.47	0.51	0.54	0.56	0.59
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.13	0.22	0.30	0.38	0.47	0.56	0.64	0.71	0.74	0.77	0.80	0.82
-55	0.00	0.00	0.00	0.00	0.00	0.04	0.15	0.24	0.35	0.46	0.59	0.68	0.76	0.85	0.97	1.18	1.22	1.27	1.32
-50	0.00	0.00	0.00	0.00	0.00	0.09	0.25	0.35	0.48	0.62	0.81	0.89	0.96	1.05	1.23	1.62	1.68	1.74	1.81
-45	0.00	0.00	0.00	0.00	0.03	0.16	0.34	0.49	0.64	0.76	0.93	1.04	1.18	1.39	1.61	1.95	2.11	2.20	2.21
-40	0.00	0.00	0.00	0.00	0.07	0.23	0.43	0.63	0.81	0.91	1.05	1.19	1.41	1.72	2.00	2.27	2.53	2.67	2.60
-35	0.00	0.00	0.00	0.00	0.11	0.30	0.50	0.73	0.89	1.06	1.26	1.51	1.88	2.34	2.85	3.35	3.76	4.03	4.05
-30	0.00	0.00	0.00	0.00	0.15	0.37	0.57	0.82	0.96	1.22	1.47	1.83	2.35	2.96	3.71	4.44	4.99	5.38	5.50
-25	0.00	0.00	0.00	0.02	0.19	0.41	0.65	0.91	1.12	1.34	1.68	2.27	3.11	4.39	5.45	7.11	9.40	12.4	13.0
-20	0.00	0.00	0.00	0.04	0.23	0.46	0.72	0.99	1.27	1.46	1.89	2.72	3.87	5.83	7.18	9.78	13.8	19.3	20.5
-15	0.00	0.00	0.00	0.06	0.25	0.49	0.77	1.06	1.27	1.61	2.17	3.14	4.65	7.15	11.3	18.2	24.8	37.1	44.0
-10	0.00	0.00	0.00	0.07	0.27	0.52	0.82	1.14	1.28	1.76	2.45	3.57	5.43	8.46	15.5	26.7	35.8	54.9	67.5
-5	0.00	0.00	0.00	0.08	0.28	0.53	0.82	1.13	1.29	1.72	2.52	3.73	5.64	9.27	18.8	32.3	54.8	368	1127
0	0.00	0.00	0.00	0.08	0.29	0.54	0.82	1.11	1.31	1.68	2.59	3.89	5.86	10.1	22.1	37.9	73.7	682	2186
5	0.00	0.00	0.00	0.08	0.28	0.52	0.82	1.11	1.32	1.69	2.46	3.77	5.53	8.85	17.9	32.2	55.0	366	1124
10	0.00	0.00	0.00	0.07	0.27	0.50	0.81	1.11	1.33	1.70	2.32	3.66	5.19	7.63	13.7	26.4	36.3	50.4	62.9
15	0.00	0.00	0.00	0.06	0.25	0.47	0.75	1.02	1.28	1.57	2.07	3.18	4.40	6.26	10.3	18.0	24.7	34.5	41.9
20	0.00	0.00	0.00	0.05	0.23	0.45	0.69	0.93	1.24	1.44	1.82	2.70	3.60	4.89	6.92	9.55	13.1	18.6	20.9
25	0.00	0.00	0.00	0.03	0.20	0.41	0.62	0.97	1.09	1.30	1.62	2.34	2.93	3.85	5.23	6.94	9.03	12.2	13.8
30	0.00	0.00	0.00	0.00	0.16	0.37	0.54	1.01	0.94	1.16	1.42	1.98	2.27	2.81	3.54	4.33	4.99	5.84	6.65
35	0.00	0.00	0.00	0.00	0.13	0.31	0.59	0.80	1.03	1.05	1.22	1.57	1.86	2.25	2.74	3.29	3.73	4.25	4.69
40	0.00	0.00	0.00	0.00	0.09	0.24	0.64	0.60	1.12	0.95	1.02	1.16	1.46	1.70	1.95	2.24	2.47	2.66	2.74
45	0.00	0.00	0.00	0.00	0.04	0.18	0.46	0.51	0.81	0.80	1.06	1.08	1.22	1.40	1.59	1.79	1.94	2.04	2.09
50	0.00	0.00	0.00	0.00	0.00	0.11	0.27	0.42	0.49	0.65	1.09	1.00	0.98	1.10	1.24	1.34	1.40	1.42	1.43
55	0.00	0.00	0.00	0.00	0.00	0.06	0.17	0.28	0.37	0.49	0.75	0.75	0.79	0.91	1.02	1.10	1.14	1.16	1.17
60	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.14	0.24	0.33	0.42	0.51	0.61	0.73	0.80	0.86	0.88	0.89	0.91
65	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.07	0.12	0.18	0.25	0.33	0.39	0.48	0.53	0.58	0.60	0.62	0.63
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.08	0.14	0.18	0.22	0.26	0.30	0.33	0.35	0.35
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.04	0.07	0.09	0.11	0.13	0.15	0.16	0.17	0.18
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-11

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.8V I:0.7043A P:149.4W PF:0.9649 Lamp Flux:11026.7x1 lm		
NAME: 8.03.004.0198 3°SP-F310A-40P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090056
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: ×100cd		
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.17	0.16	0.16	0.15	0.12	0.10	0.08	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.35	0.33	0.31	0.29	0.24	0.20	0.16	0.12	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.58	0.56	0.54	0.52	0.49	0.41	0.35	0.29	0.21	0.16	0.09	0.05	0.01	0.00	0.00	0.00	0.00	0.00	
-60	0.82	0.79	0.77	0.75	0.74	0.62	0.54	0.46	0.36	0.30	0.17	0.09	0.01	0.00	0.00	0.00	0.00	0.00	
-55	1.31	1.28	1.22	1.10	0.93	0.82	0.74	0.66	0.54	0.43	0.30	0.19	0.07	0.00	0.00	0.00	0.00	0.00	
-50	1.80	1.76	1.68	1.44	1.12	1.02	0.93	0.86	0.73	0.55	0.42	0.28	0.14	0.01	0.00	0.00	0.00	0.00	
-45	2.23	2.18	2.01	1.75	1.47	1.27	1.09	0.99	0.85	0.70	0.53	0.39	0.20	0.05	0.00	0.00	0.00	0.00	
-40	2.65	2.60	2.34	2.06	1.81	1.53	1.25	1.12	0.98	0.85	0.64	0.49	0.26	0.10	0.00	0.00	0.00	0.00	
-35	4.01	3.82	3.40	2.93	2.43	1.98	1.62	1.35	1.14	0.94	0.76	0.55	0.33	0.14	0.01	0.00	0.00	0.00	
-30	5.37	5.03	4.46	3.81	3.06	2.43	1.98	1.58	1.30	1.03	0.88	0.62	0.39	0.18	0.02	0.00	0.00	0.00	
-25	12.4	9.59	7.17	5.52	4.83	3.39	2.48	1.81	1.42	1.18	0.95	0.69	0.44	0.21	0.04	0.00	0.00	0.00	
-20	19.4	14.2	9.89	7.22	6.60	4.36	2.97	2.04	1.55	1.34	1.03	0.77	0.49	0.25	0.06	0.00	0.00	0.00	
-15	37.5	25.0	18.3	11.4	7.68	5.00	3.35	2.29	1.69	1.35	1.11	0.81	0.53	0.27	0.07	0.00	0.00	0.00	
-10	55.6	35.8	26.8	15.6	8.77	5.64	3.72	2.55	1.83	1.36	1.19	0.85	0.57	0.29	0.09	0.00	0.00	0.00	
-5	551	59.4	33.4	19.8	9.75	5.86	3.94	2.80	1.84	1.38	1.17	0.86	0.59	0.31	0.10	0.00	0.00	0.00	
0	1047	83.0	40.1	23.9	10.7	6.07	4.17	3.06	1.85	1.39	1.15	0.87	0.61	0.33	0.10	0.00	0.00	0.00	
5	550	60.7	33.8	19.6	9.45	5.70	4.08	2.78	1.84	1.39	1.16	0.85	0.59	0.32	0.10	0.00	0.00	0.00	
10	53.4	38.4	27.5	15.2	8.18	5.32	4.00	2.50	1.84	1.39	1.17	0.84	0.57	0.30	0.10	0.00	0.00	0.00	
15	36.2	26.0	18.6	11.2	6.59	4.51	3.43	2.23	1.67	1.34	1.08	0.79	0.52	0.27	0.08	0.00	0.00	0.00	
20	19.0	13.5	9.70	7.20	5.00	3.69	2.86	1.96	1.50	1.30	0.98	0.74	0.48	0.25	0.06	0.00	0.00	0.00	
25	12.5	9.30	7.07	5.43	3.95	3.04	2.43	1.74	1.37	1.14	0.97	0.67	0.45	0.21	0.04	0.00	0.00	0.00	
30	5.92	5.06	4.44	3.65	2.91	2.38	2.00	1.52	1.24	0.99	0.96	0.60	0.42	0.18	0.02	0.00	0.00	0.00	
35	4.33	3.79	3.37	2.83	2.33	1.95	1.61	1.31	1.12	1.05	0.80	0.79	0.34	0.14	0.01	0.00	0.00	0.00	
40	2.74	2.52	2.30	2.00	1.76	1.51	1.23	1.10	0.99	1.12	0.64	0.99	0.25	0.10	0.00	0.00	0.00	0.00	
45	2.09	1.98	1.84	1.64	1.47	1.28	1.13	1.13	0.86	0.83	0.56	0.68	0.19	0.05	0.00	0.00	0.00	0.00	
50	1.44	1.44	1.39	1.29	1.17	1.04	1.03	1.15	0.73	0.54	0.47	0.38	0.13	0.01	0.00	0.00	0.00	0.00	
55	1.18	1.17	1.15	1.07	0.97	0.84	0.79	0.80	0.54	0.40	0.32	0.22	0.07	0.00	0.00	0.00	0.00	0.00	
60	0.91	0.90	0.91	0.85	0.77	0.64	0.54	0.45	0.35	0.27	0.16	0.07	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.63	0.61	0.61	0.57	0.51	0.42	0.35	0.28	0.20	0.13	0.08	0.04	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.35	0.33	0.31	0.28	0.24	0.20	0.16	0.10	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.18	0.17	0.15	0.14	0.12	0.10	0.08	0.05	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-11

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: