

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		11743.1 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	26.5V x 20.7H
	At 50% of Imax	10.9V x 9.9H
	At 90% of Imax	3.5V x 3.8H
Beam Flux	Total	981.2 lumens per klm.
	To 10% of Imax	550.3 lumens per klm.
	To 50% of Imax	239.2 lumens per klm.
	To 90% of Imax	22.1 lumens per klm.
Upward LOR		0.0 %
Downward LOR		98.1 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-30

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.5V I:0.6876A P:146.4W PF:0.9653 Lamp Flux:12125.2x1 lm		
NAME: 8.03.004.0201 8° SP-F310A-40P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024080133
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

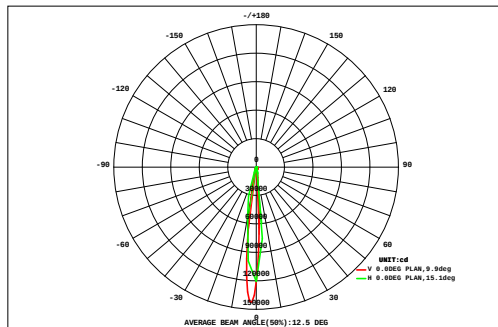

DATA OF LAMP		Eff:82.84lm/W	
MODEL	SP-F310A-40P-RDM	Imax(cd)	142387
NOMINAL POWER(W)	146	AVAILABILITY(%)	58.8
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	7130
NOMINAL FLUX(lm)	12125.2	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	12125
TEST VOLTAGE(V)	220.5	θ @50%(H,V)	10,11DEG

		AREA FLUX DIAGRAM																UNIT:lm			Φ t	Φ a
		3.05	3.36	3.66	3.95	4.20	4.39	4.49	4.52	4.46	4.32	4.11	3.85	3.55	3.24	2.92	2.59	2.27	1.99	64.9	0.00	
VERTICAL (DEG)	18	3.15	3.55	3.96	4.41	4.89	5.39	5.88	6.29	6.53	6.52	6.24	5.76	5.18	4.59	4.02	3.51	3.05	2.64	85.6	0.00	
	16	3.14	3.63	4.19	4.88	5.71	6.69	7.76	8.78	9.50	9.71	9.35	8.55	7.56	6.55	5.64	4.86	4.21	3.63	114	0.00	
	14	3.30	3.86	4.52	5.33	6.33	7.55	8.90	10.2	11.1	11.4	11.0	10.0	8.81	7.59	6.49	5.56	4.80	4.12	131	0.00	
	12	4.91	5.75	6.80	8.11	9.61	11.2	12.4	13.1	12.8	11.8	10.3	8.77	7.37	6.19	5.26	4.47	3.83	3.27	146	0.00	
	10	5.56	6.53	7.78	9.34	11.1	12.9	14.4	15.0	14.5	13.0	11.2	9.33	7.72	6.42	5.41	4.57	3.90	3.32	162	0.00	
	8	5.21	6.23	7.62	9.66	12.9	19.5	29.6	43.4	55.5	58.1	49.0	34.6	21.8	13.2	8.95	6.53	5.15	4.20	391	268	
	6	4.33	5.34	6.85	9.50	14.9	28.7	52.0	86.2	118	127	107	73.3	43.4	23.6	14.3	9.50	7.06	5.55	737	663	
	4	4.26	5.34	7.00	10.1	16.7	33.9	63.6	107	148	160	135	91.9	53.7	28.6	16.9	10.9	7.99	6.21	908	841	
	2	7.68	10.7	16.5	30.5	60.1	108	164	197	181	130	76.5	38.2	20.3	12.0	8.36	6.34	5.02	4.15	1075	1010	
	0	8.77	12.4	19.8	37.7	75.7	136	205	240	213	142	75.6	32.7	16.0	9.81	7.24	5.78	4.65	3.90	1245	1177	
-	2	7.10	9.69	14.6	26.0	50.0	89.8	139	174	173	137	91.9	52.8	29.6	16.8	10.8	7.70	5.86	4.71	1040	974	
	4	3.93	4.47	4.85	4.04	2.66	4.81	14.5	47.5	93.9	124	118	87.0	52.9	28.9	17.0	11.0	7.92	6.08	633	573	
	6	3.01	2.96	1.99	0.27	0.00	0.00	0.00	14.0	73.3	124	129	100	61.7	33.4	19.3	12.2	8.70	6.60	591	545	
	8	6.44	8.27	11.1	16.8	25.9	41.3	58.6	67.9	61.7	44.0	26.7	14.9	9.75	7.83	6.42	5.35	4.49	3.79	421	341	
	10	6.97	9.03	12.2	18.9	29.2	45.4	61.1	62.5	44.1	17.3	3.44	0.18	0.57	2.32	3.66	3.89	3.60	3.20	328	269	
	12	5.54	6.98	9.11	13.3	19.6	29.3	39.0	41.1	32.0	20.2	17.9	14.0	9.67	6.39	5.29	4.82	4.21	3.64	282	215	
-18	14	3.04	3.39	3.68	3.49	3.07	2.43	3.83	10.8	22.8	33.0	34.7	29.0	20.4	13.4	9.32	7.07	5.63	4.64	214	140	
	16	-18	-16	-14	-12	-10	-8	-6	-4	HORIZONTAL (DEG)				4	6	8	10	12	14	16	18	
Φ t		89.4	111	146	216	353	587	883	1149	1275	1173	917	615	380	231	157	117	92.4	75.6	8568	---	
Φ a		0.00	0.00	36.0	124	264	520	807	1071	1204	1103	851	559	304	137	38.8	0.00	0.00	0.00	---	7018	

one-half-peak spread: U:6.4,D:4.6 , L:5.4,R:4.6


NEMA Beam Type: Type 2

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-30

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.5V I:0.6876A P:146.4W PF:0.9653 Lamp Flux:12125.2x1 lm		
NAME: 8.03.004.0201 8° SP-F310A-40P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024080133
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

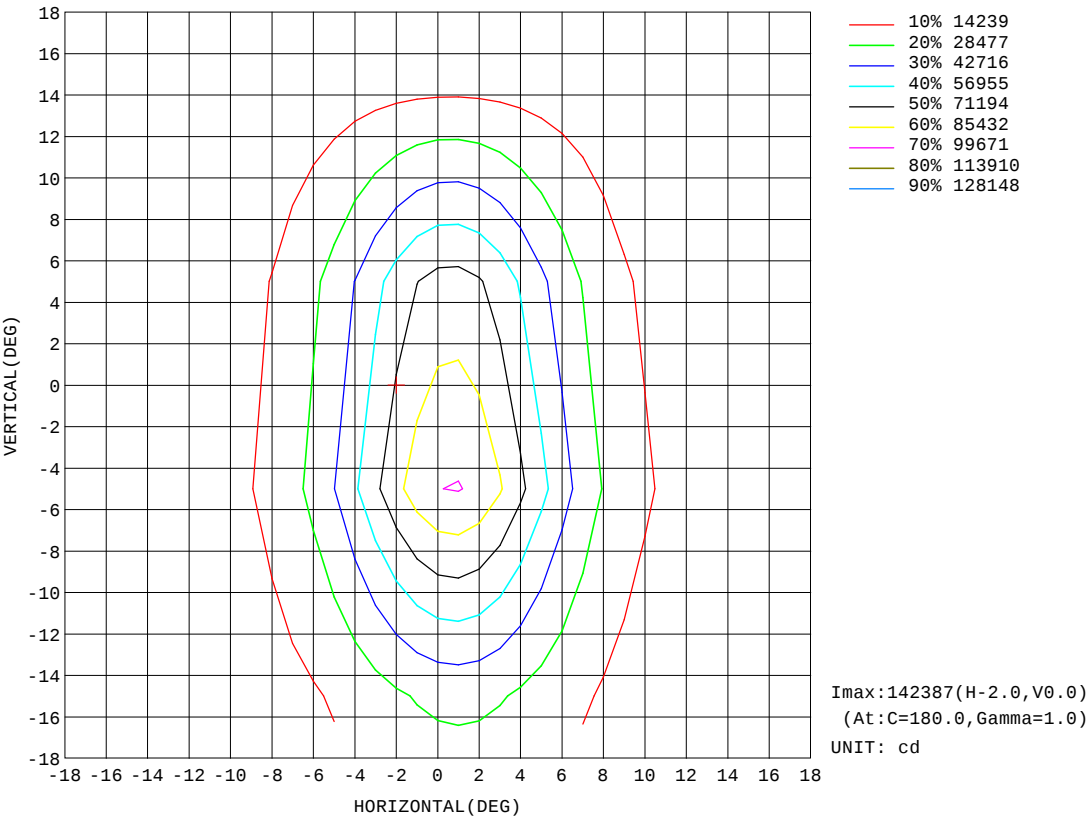


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-30

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.5V I:0.6876A P:146.4W PF:0.9653 Lamp Flux:12125.2x1 lm		
NAME: 8.03.004.0201 8° SP-F310A-40P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024080133
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

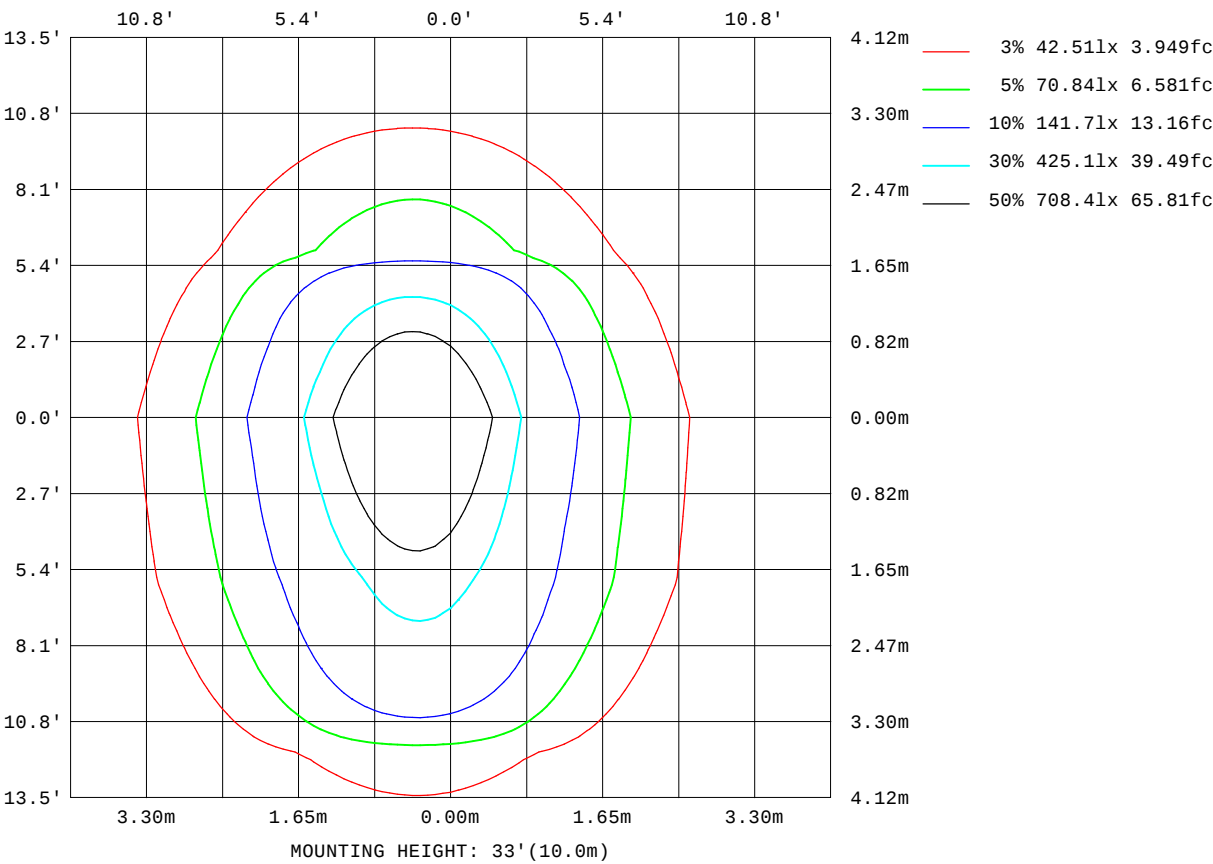


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-30

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.5V I:0.6876A P:146.4W PF:0.9653 Lamp Flux:12125.2x1 lm		
NAME: 8.03.004.0201 8° SP-F310A-40P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024080133
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

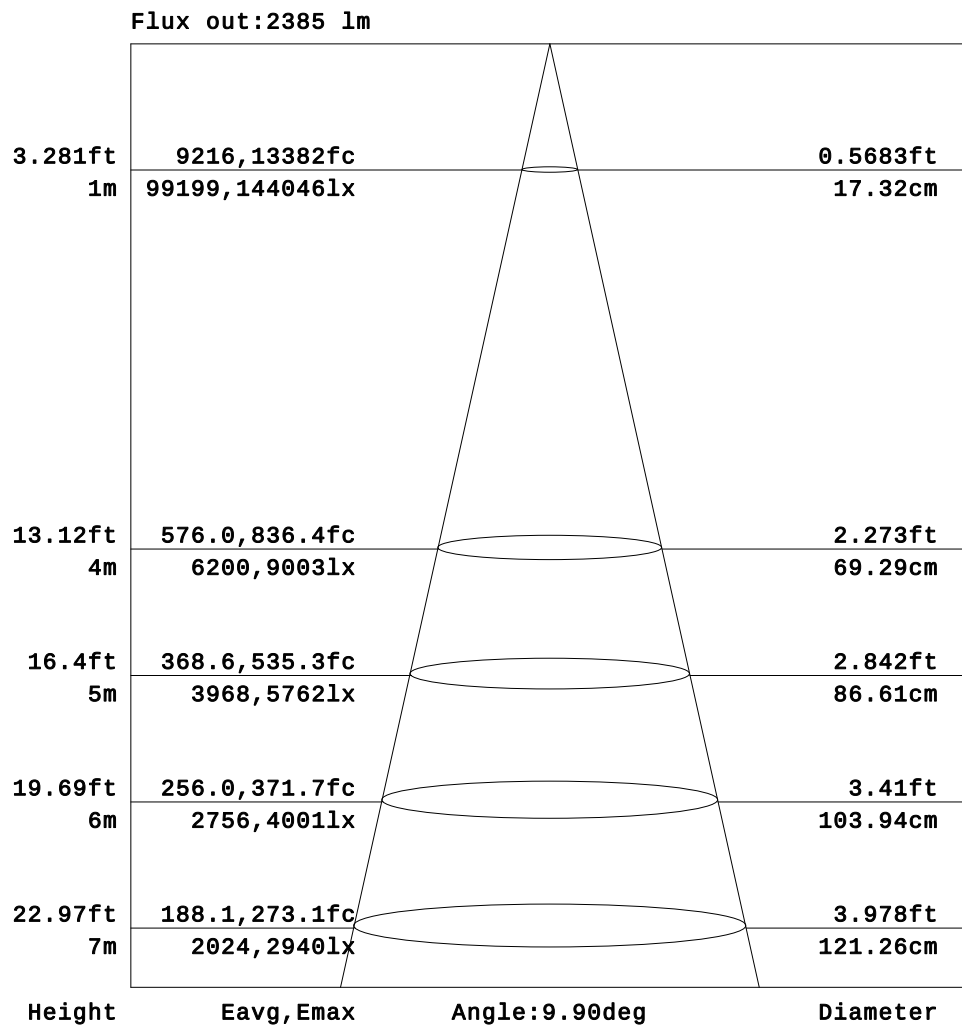


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-30

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

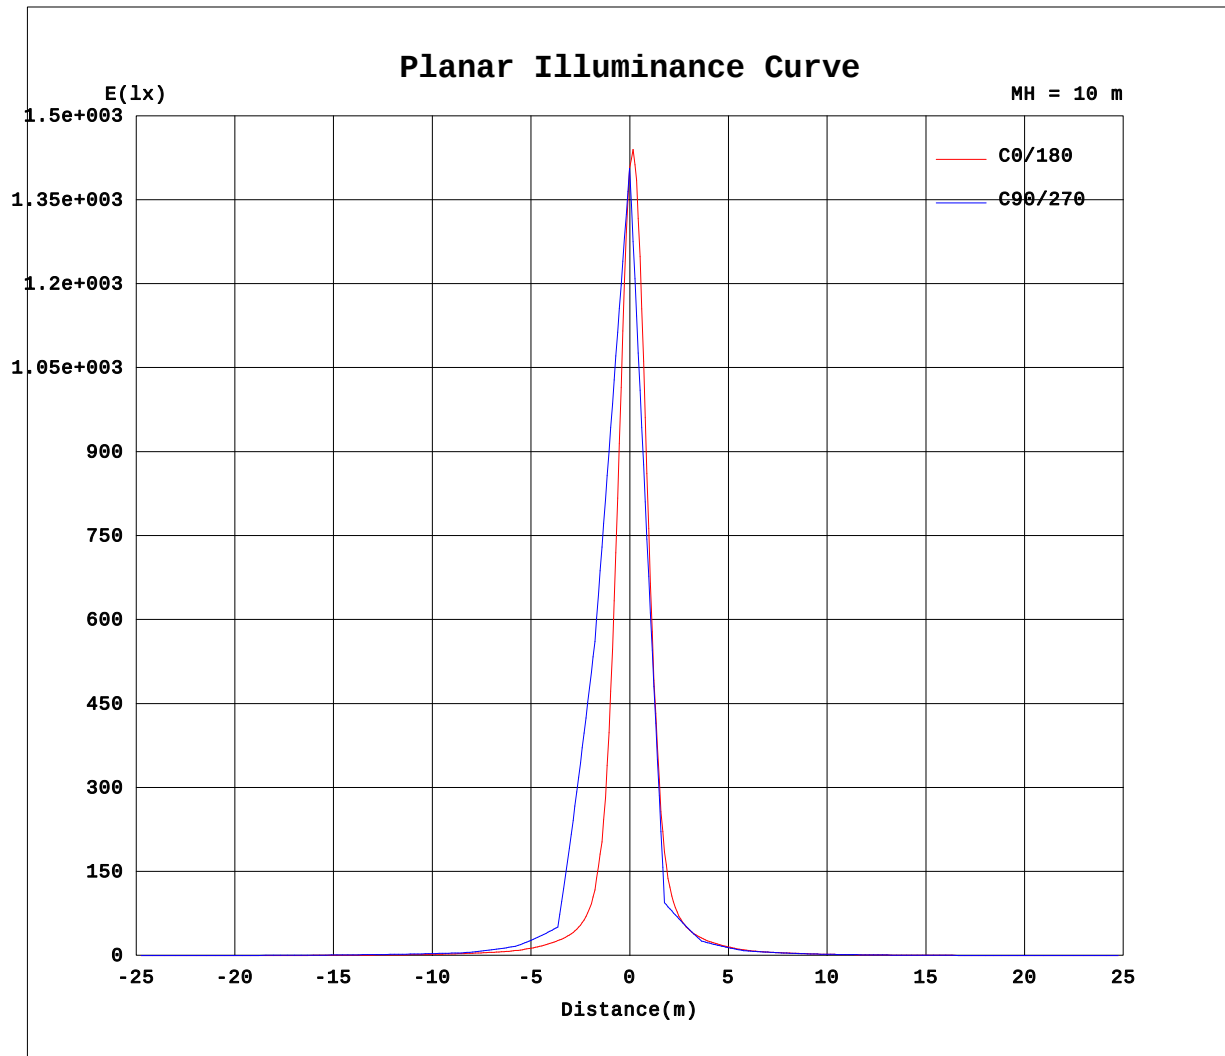

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 28.0DEG
Operators: QC1
Test Date: 2024-08-30

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 83%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.5V I:0.6876A P:146.4W PF:0.9653 Lamp Flux:12125.2x1 lm		
NAME: 8.03.004.0201 8° SP-F310A-40P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024080133
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1																	UNIT: ×100cd		
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.11	0.27	0.45	0.64	0.86	1.08	1.30	1.49	1.64	1.76	1.86	1.91	1.94	1.93
-75	0.00	0.00	0.00	0.00	0.07	0.21	0.45	0.72	1.01	1.32	1.63	1.92	2.18	2.40	2.58	2.73	2.83	2.90	2.91
-70	0.00	0.00	0.00	0.04	0.29	0.59	0.95	1.34	1.75	2.15	2.53	2.86	3.14	3.38	3.58	3.74	3.84	3.89	3.88
-65	0.00	0.00	0.00	0.03	0.28	0.63	1.07	1.53	2.02	2.51	2.98	3.39	3.76	4.09	4.37	4.60	4.77	4.88	4.91
-60	0.00	0.00	0.00	0.28	0.68	1.18	1.74	2.31	2.88	3.45	3.93	4.38	4.79	5.15	5.45	5.69	5.85	5.93	5.92
-55	0.00	0.00	0.00	0.15	0.56	1.10	1.72	2.35	2.99	3.61	4.20	4.73	5.24	5.77	6.31	6.83	7.26	7.55	7.67
-50	0.00	0.00	0.06	0.49	1.05	1.75	2.45	3.16	3.85	4.49	5.11	5.70	6.32	7.03	7.81	8.52	9.06	9.36	9.38
-45	0.00	0.00	0.00	0.27	0.79	1.46	2.19	2.93	3.69	4.39	5.06	5.72	6.49	7.41	8.38	9.24	9.92	10.4	10.6
-40	0.00	0.00	0.14	0.63	1.30	2.05	2.81	3.63	4.37	5.09	5.79	6.63	7.75	8.96	10.0	10.8	11.4	11.7	11.7
-35	0.00	0.00	0.01	0.39	1.01	1.80	2.62	3.44	4.28	5.07	5.91	7.01	8.36	9.76	11.5	13.7	16.2	18.1	19.0
-30	0.00	0.00	0.25	0.84	1.66	2.54	3.40	4.28	5.14	6.01	7.28	8.98	10.7	12.5	15.6	19.5	23.4	25.8	26.0
-25	0.00	0.00	0.03	0.51	1.27	2.16	3.05	3.97	4.88	5.80	7.06	8.81	10.7	13.5	18.2	24.4	31.9	39.5	44.0
-20	0.00	0.00	0.32	1.04	1.94	2.84	3.81	4.77	5.69	6.96	8.87	10.8	13.8	19.6	27.7	38.0	49.8	59.9	60.8
-15	0.00	0.00	0.04	0.61	1.46	2.38	3.31	4.29	5.26	6.33	8.06	10.1	12.7	18.2	27.0	39.9	66.7	157	317
-10	0.00	0.00	0.36	1.16	2.08	3.02	3.99	4.99	6.00	7.61	9.77	12.0	17.5	26.6	39.9	67.8	165	468	532
-5	0.00	0.00	0.06	0.69	1.54	2.47	3.43	4.43	5.42	6.61	8.58	10.7	14.1	21.4	32.3	51.3	110	424	993
0	0.00	0.00	0.44	1.21	2.12	3.06	4.07	5.07	6.11	7.82	10.0	12.5	18.5	28.2	43.7	85.1	326	1162	1206
5	0.00	0.00	0.08	0.70	1.53	2.45	3.40	4.38	5.35	6.50	8.37	10.5	13.5	20.0	29.7	45.7	91.7	334	757
10	0.00	0.00	0.41	1.14	2.04	2.95	3.91	4.87	5.82	7.26	9.32	11.4	15.3	22.6	32.3	45.6	68.0	94.2	95.3
15	0.00	0.00	0.06	0.64	1.42	2.29	3.19	4.13	5.05	6.01	7.47	9.40	11.5	15.2	21.1	28.9	39.6	54.6	65.4
20	0.00	0.00	0.36	1.03	1.85	2.70	3.61	4.51	5.36	6.36	7.90	9.75	11.5	14.5	18.8	24.0	28.5	31.3	31.1
25	0.00	0.00	0.03	0.53	1.22	2.02	2.84	3.70	4.55	5.36	6.33	7.66	9.20	10.9	13.3	16.3	19.3	21.8	22.9
30	0.00	0.00	0.25	0.82	1.54	2.32	3.11	3.93	4.70	5.45	6.27	7.41	8.81	10.1	11.3	12.3	13.4	14.0	14.0
35	0.00	0.00	0.00	0.38	0.95	1.64	2.36	3.10	3.87	4.57	5.26	6.01	6.92	7.92	8.87	9.74	10.6	11.2	11.5
40	0.00	0.00	0.13	0.59	1.18	1.82	2.49	3.19	3.89	4.51	5.12	5.67	6.23	6.87	7.54	8.17	8.64	8.90	8.88
45	0.00	0.00	0.00	0.20	0.64	1.18	1.75	2.37	3.01	3.61	4.17	4.69	5.17	5.65	6.13	6.59	6.97	7.24	7.35
50	0.00	0.00	0.01	0.32	0.73	1.22	1.76	2.30	2.85	3.39	3.86	4.30	4.68	5.01	5.29	5.50	5.66	5.76	5.77
55	0.00	0.00	0.00	0.05	0.32	0.68	1.09	1.54	1.99	2.45	2.90	3.31	3.67	3.98	4.27	4.48	4.64	4.76	4.81
60	0.00	0.00	0.00	0.06	0.32	0.62	0.96	1.31	1.68	2.06	2.43	2.76	3.04	3.29	3.51	3.67	3.77	3.83	3.84
65	0.00	0.00	0.00	0.00	0.08	0.22	0.45	0.70	0.97	1.25	1.53	1.81	2.06	2.27	2.46	2.60	2.71	2.77	2.80
70	0.00	0.00	0.00	0.00	0.00	0.10	0.25	0.41	0.59	0.77	0.97	1.17	1.34	1.48	1.59	1.67	1.73	1.75	1.74
75	0.00	0.00	0.00	0.00	0.00	0.01	0.08	0.15	0.24	0.33	0.42	0.52	0.63	0.72	0.81	0.87	0.92	0.94	0.94
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.07	0.11	0.13	0.13	0.13	0.12
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-30

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.5V I:0.6876A P:146.4W PF:0.9653 Lamp Flux:12125.2x1 lm		
NAME: 8.03.004.0201 8° SP-F310A-40P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024080133
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: ×100cd		
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	1.89	1.82	1.73	1.58	1.42	1.24	1.02	0.80	0.58	0.38	0.22	0.08	0.00	0.00	0.00	0.00	0.00	0.00	
-75	2.89	2.82	2.72	2.58	2.38	2.18	1.93	1.65	1.35	1.04	0.75	0.49	0.25	0.10	0.00	0.00	0.00	0.00	
-70	3.82	3.71	3.56	3.36	3.10	2.83	2.51	2.15	1.75	1.35	0.96	0.60	0.30	0.06	0.00	0.00	0.00	0.00	
-65	4.88	4.77	4.61	4.40	4.13	3.83	3.47	3.08	2.65	2.18	1.69	1.21	0.77	0.38	0.10	0.00	0.00	0.00	
-60	5.82	5.65	5.43	5.14	4.80	4.42	3.98	3.51	2.99	2.43	1.84	1.27	0.76	0.33	0.02	0.00	0.00	0.00	
-55	7.60	7.35	6.96	6.46	5.91	5.39	4.89	4.39	3.84	3.26	2.61	1.96	1.34	0.77	0.31	0.01	0.00	0.00	
-50	9.13	8.61	7.90	7.12	6.38	5.76	5.21	4.62	3.99	3.34	2.60	1.90	1.23	0.62	0.17	0.00	0.00	0.00	
-45	10.5	10.1	9.49	8.67	7.69	6.73	5.94	5.28	4.64	3.97	3.26	2.51	1.77	1.07	0.48	0.05	0.00	0.00	
-40	11.5	10.9	10.1	9.06	7.82	6.70	5.86	5.18	4.48	3.77	3.01	2.22	1.46	0.77	0.24	0.00	0.00	0.00	
-35	18.6	17.0	14.7	12.3	10.3	8.80	7.44	6.25	5.34	4.57	3.80	2.98	2.14	1.35	0.64	0.13	0.00	0.00	
-30	24.1	20.5	16.4	13.0	10.9	9.24	7.53	6.18	5.28	4.46	3.63	2.71	1.86	1.05	0.38	0.00	0.00	0.00	
-25	41.6	34.5	26.8	20.1	14.9	11.5	9.43	7.61	6.15	5.18	4.32	3.44	2.51	1.63	0.81	0.20	0.00	0.00	
-20	51.2	39.1	28.8	20.7	14.3	11.1	9.11	7.15	5.80	4.88	3.98	3.04	2.11	1.20	0.45	0.00	0.00	0.00	
-15	229	88.0	46.3	30.2	20.7	14.1	10.8	8.77	6.83	5.58	4.65	3.73	2.74	1.80	0.92	0.25	0.00	0.00	
-10	207	75.7	42.0	27.7	18.4	12.6	10.1	7.94	6.21	5.17	4.22	3.23	2.24	1.31	0.51	0.01	0.00	0.00	
-5	611	159	61.1	35.9	23.9	15.8	11.4	9.28	7.17	5.76	4.80	3.85	2.84	1.87	0.96	0.26	0.00	0.00	
0	347	89.7	44.4	28.7	18.9	12.8	10.2	8.00	6.25	5.19	4.24	3.26	2.26	1.30	0.50	0.01	0.00	0.00	
5	454	124	52.3	32.3	21.8	14.7	11.1	8.98	6.99	5.69	4.74	3.80	2.79	1.83	0.92	0.24	0.00	0.00	
10	70.0	46.8	32.3	22.4	15.4	11.5	9.48	7.47	6.00	5.04	4.12	3.13	2.15	1.24	0.46	0.00	0.00	0.00	
15	58.3	42.9	30.8	22.2	16.1	12.1	9.82	7.95	6.40	5.36	4.47	3.56	2.59	1.66	0.82	0.19	0.00	0.00	
20	28.1	23.4	18.3	14.2	11.4	9.68	7.91	6.44	5.47	4.61	3.74	2.81	1.91	1.04	0.35	0.00	0.00	0.00	
25	22.0	19.5	16.5	13.6	11.2	9.48	7.97	6.63	5.63	4.82	4.00	3.13	2.25	1.41	0.65	0.11	0.00	0.00	
30	13.2	12.2	11.1	10.1	8.81	7.46	6.35	5.55	4.81	4.05	3.23	2.37	1.57	0.82	0.25	0.00	0.00	0.00	
35	11.3	10.6	9.80	8.98	8.10	7.14	6.22	5.46	4.78	4.08	3.35	2.56	1.79	1.06	0.45	0.04	0.00	0.00	
40	8.59	8.10	7.48	6.82	6.23	5.70	5.13	4.55	3.92	3.25	2.52	1.81	1.11	0.52	0.09	0.00	0.00	0.00	
45	7.27	7.03	6.66	6.21	5.73	5.28	4.80	4.29	3.73	3.14	2.50	1.85	1.23	0.66	0.22	0.00	0.00	0.00	
50	5.70	5.54	5.32	5.02	4.68	4.30	3.88	3.38	2.85	2.27	1.70	1.14	0.64	0.24	0.00	0.00	0.00	0.00	
55	4.79	4.69	4.53	4.31	4.04	3.72	3.37	2.97	2.51	2.02	1.53	1.06	0.64	0.28	0.06	0.00	0.00	0.00	
60	3.78	3.66	3.49	3.28	3.03	2.73	2.40	2.03	1.60	1.18	0.80	0.46	0.19	0.00	0.00	0.00	0.00	0.00	
65	2.78	2.71	2.60	2.45	2.27	2.05	1.80	1.51	1.21	0.90	0.61	0.36	0.17	0.05	0.00	0.00	0.00	0.00	
70	1.70	1.64	1.54	1.41	1.26	1.08	0.86	0.64	0.44	0.26	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.92	0.89	0.84	0.77	0.68	0.59	0.50	0.39	0.28	0.18	0.10	0.03	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.11	0.09	0.06	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-30

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: