

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		21892.4 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	18.8V x 13.5H
	At 50% of Imax	10.5V x 8.2H
	At 90% of Imax	3.9V x 4.7H
Beam Flux	Total	944.0 lumens per klm.
	To 10% of Imax	586.0 lumens per klm.
	To 50% of Imax	324.9 lumens per klm.
	To 90% of Imax	48.0 lumens per klm.
Upward LOR		0.0 %
Downward LOR		94.4 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-30

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.4V I:0.6923A P:147.2W PF:0.9646 Lamp Flux:12530.9x1 lm		
NAME: 8.03.004.0202 3° SP-F310A-40P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024080134
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

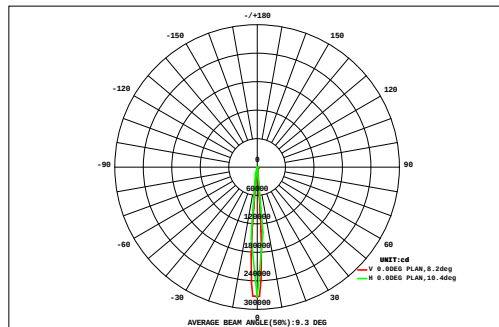

DATA OF LAMP		Eff:85.14lm/W	
MODEL	SP-F310A-40P-RDM	Imax(cd)	274330
NOMINAL POWER(W)	148	AVAILABILITY(%)	67.3
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	8435
NOMINAL FLUX(lm)	12530.9	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	12531
TEST VOLTAGE(V)	220.4	θ @50%(H,V)	8,10DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
	2.03	2.20	2.39	2.59	2.80	2.98	3.12	3.21	3.24	3.18	3.05	2.89	2.68	2.48	2.27	2.08	1.91	1.75	46.8	0.00		
	2.15	2.40	2.67	2.96	3.28	3.63	3.96	4.25	4.45	4.49	4.35	4.09	3.73	3.36	2.99	2.66	2.38	2.13	59.9	0.00		
	2.26	2.61	2.99	3.40	3.89	4.49	5.12	5.70	6.16	6.37	6.24	5.83	5.26	4.64	4.03	3.49	3.06	2.69	78.2	0.00		
	2.40	2.81	3.25	3.73	4.32	5.03	5.81	6.53	7.11	7.39	7.26	6.76	6.07	5.33	4.59	3.94	3.43	2.99	88.7	0.00		
	3.19	3.70	4.27	4.97	5.81	6.71	7.53	8.16	8.40	8.16	7.50	6.64	5.76	4.89	4.17	3.61	3.12	2.68	99.3	0.00		
	3.55	4.13	4.78	5.61	6.59	7.64	8.57	9.26	9.47	9.09	8.26	7.22	6.20	5.21	4.40	3.80	3.26	2.78	110	0.00		
	3.41	4.03	4.79	5.80	7.26	8.92	18.8	47.2	90.9	98.3	99.5	60.8	18.9	9.46	6.18	4.82	3.93	3.27	496	384		
	3.01	3.64	4.52	5.76	7.86	10.4	34.1	105	216	236	240	143	38.3	15.9	8.81	6.30	4.90	3.97	1088	985		
	3.01	3.68	4.67	6.08	8.56	11.6	41.8	133	276	301	307	182	47.7	19.1	10.2	7.10	5.43	4.36	1372	1273		
	4.32	5.51	7.28	10.4	14.0	53.7	172	351	368	374	207	41.3	18.2	9.76	6.96	5.26	4.17	3.46	1656	1555		
	4.76	6.15	8.25	12.1	16.3	68.5	220	442	439	442	218	20.4	14.6	8.78	6.80	5.18	4.10	3.42	1940	1840		
	4.14	5.21	6.81	9.58	13.0	43.7	137	286	322	331	205	63.1	23.1	11.7	7.84	5.81	4.53	3.70	1484	1382		
	2.94	3.41	4.04	4.80	6.52	0.43	0.69	9.67	103	123	179	135	38.1	16.9	9.55	6.82	5.24	4.16	653	574		
	2.60	2.90	3.25	3.44	4.70	0.00	0.00	0.00	37.8	61.0	172	159	43.3	18.8	10.3	7.26	5.53	4.35	536	443		
	3.73	4.48	5.58	7.16	9.58	14.0	18.8	20.8	12.3	7.98	2.48	2.31	5.55	6.03	5.23	4.32	3.58	3.08	137	0.00		
	3.88	4.67	5.83	7.49	9.99	14.9	15.0	4.30	0.00	0.00	0.00	0.00	0.62	3.05	4.03	3.63	3.13	2.78	83.3	0.00		
	3.22	3.81	4.65	5.82	7.49	10.7	9.85	5.23	7.93	9.71	8.68	6.25	4.47	3.97	4.22	3.72	3.19	2.79	106	0.00		
2.10	2.39	2.69	3.05	3.40	3.64	3.87	4.75	10.2	16.2	16.3	12.0	8.61	6.52	5.17	4.24	3.54	2.95	112	0.00			
-18	-16	-14	-12	-10	-8	-6	-4	HORIZONTAL (DEG)				4	6	8	10	12	14	16	18			
Φ t	56.7	67.7	82.7	105	135	271	706	1446	1921	2037	1692	859	291	156	108	84.0	68.4	57.3	10145	---		
Φ a	0.00	0.00	0.00	0.00	0.00	162	581	1369	1839	1952	1624	774	133	0.00	0.00	0.00	0.00	0.00	---	8435		


one-half-peak spread: U:5.4,D:5.1 , L:4.7,R:3.5EMA Beam Type: Type 1 x 2 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-30

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.4V I:0.6923A P:147.2W PF:0.9646 Lamp Flux:12530.9x1 lm		
NAME: 8.03.004.0202 3° SP-F310A-40P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024080134
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

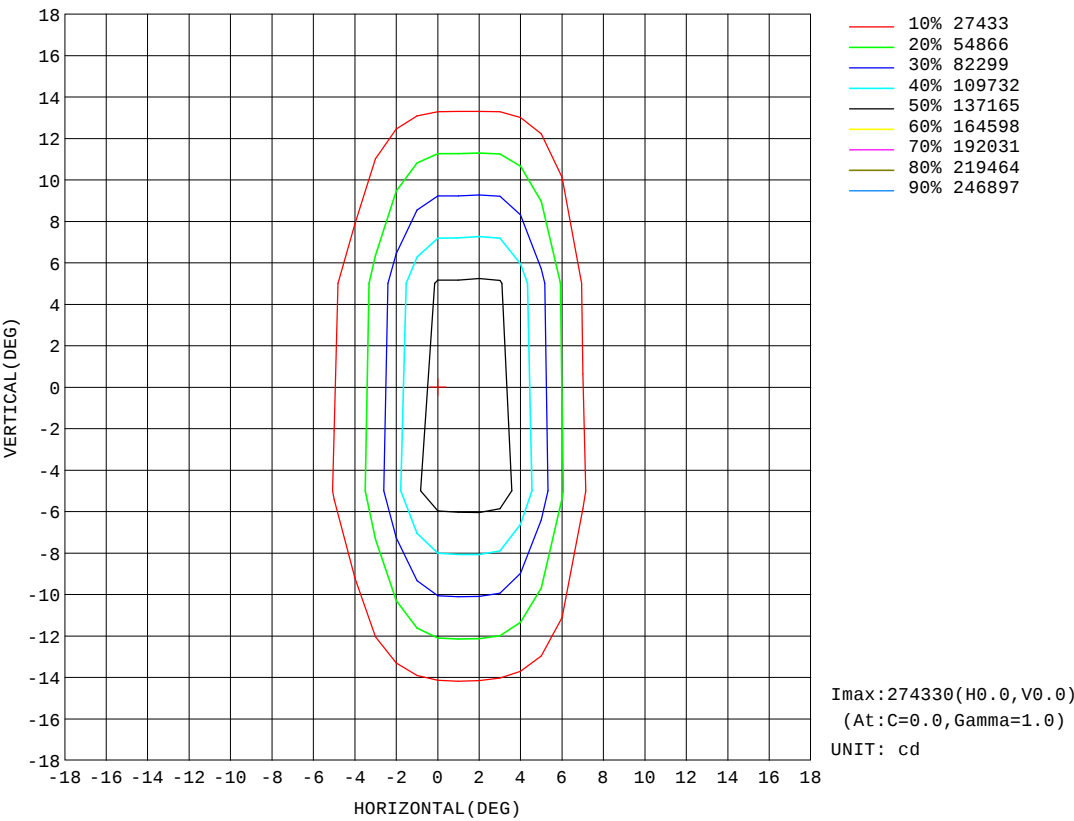


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-30

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.4V I:0.6923A P:147.2W PF:0.9646 Lamp Flux:12530.9x1 lm		
NAME: 8.03.004.0202 3° SP-F310A-40P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024080134
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

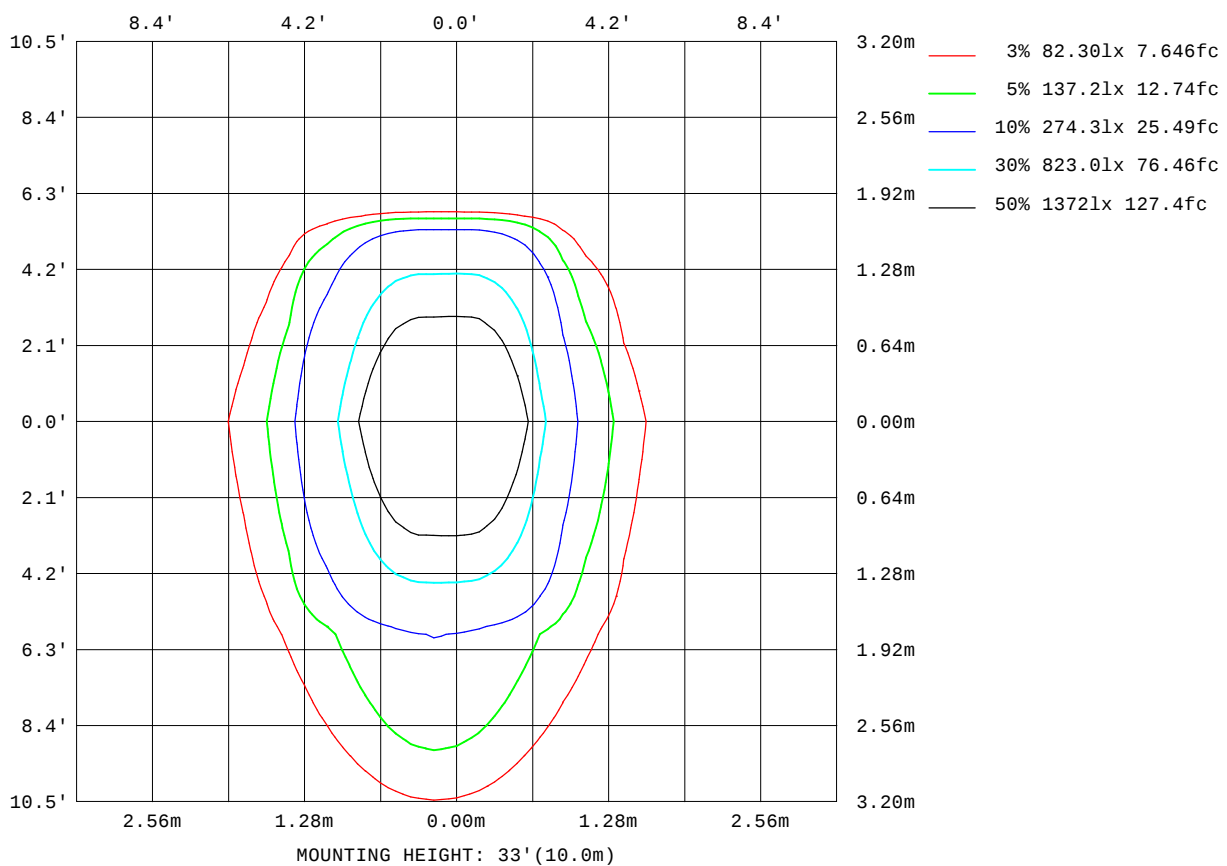


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-30

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.4V I:0.6923A P:147.2W PF:0.9646 Lamp Flux:12530.9x1 lm		
NAME: 8.03.004.0202 3° SP-F310A-40P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024080134
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

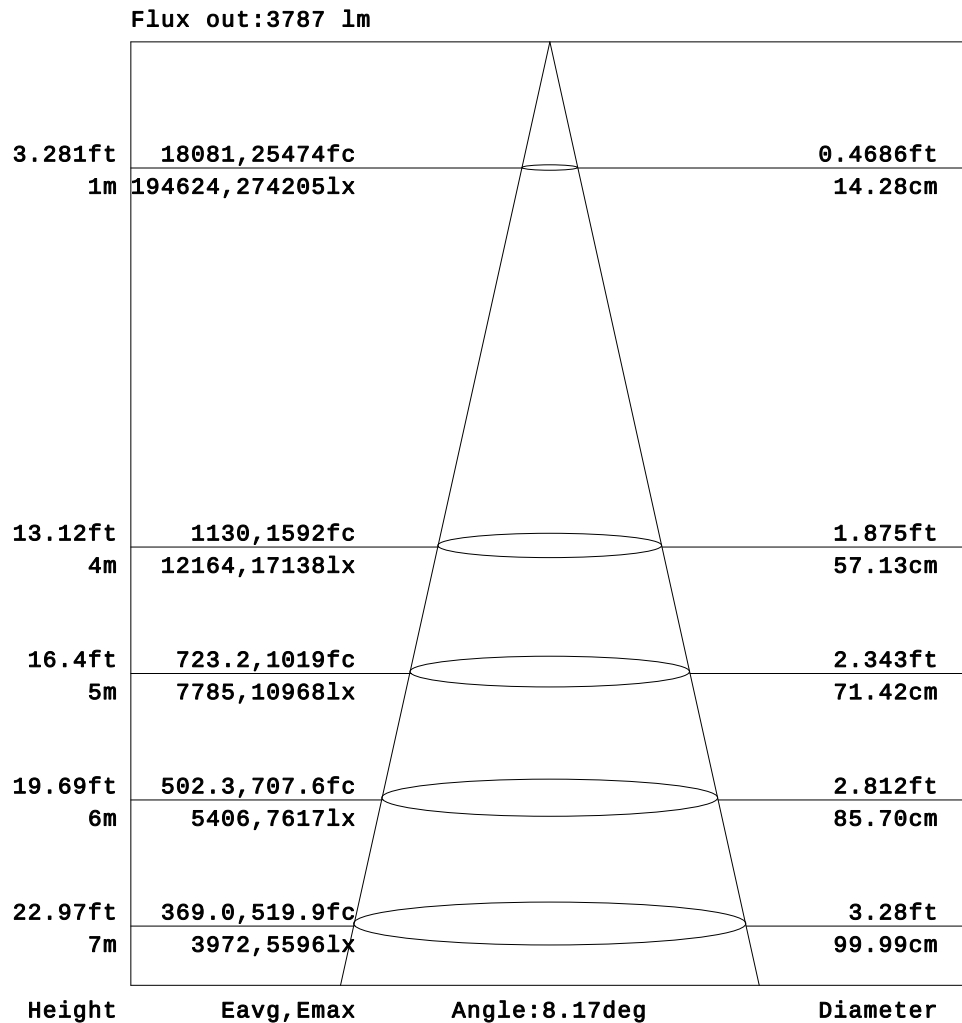


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-30

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

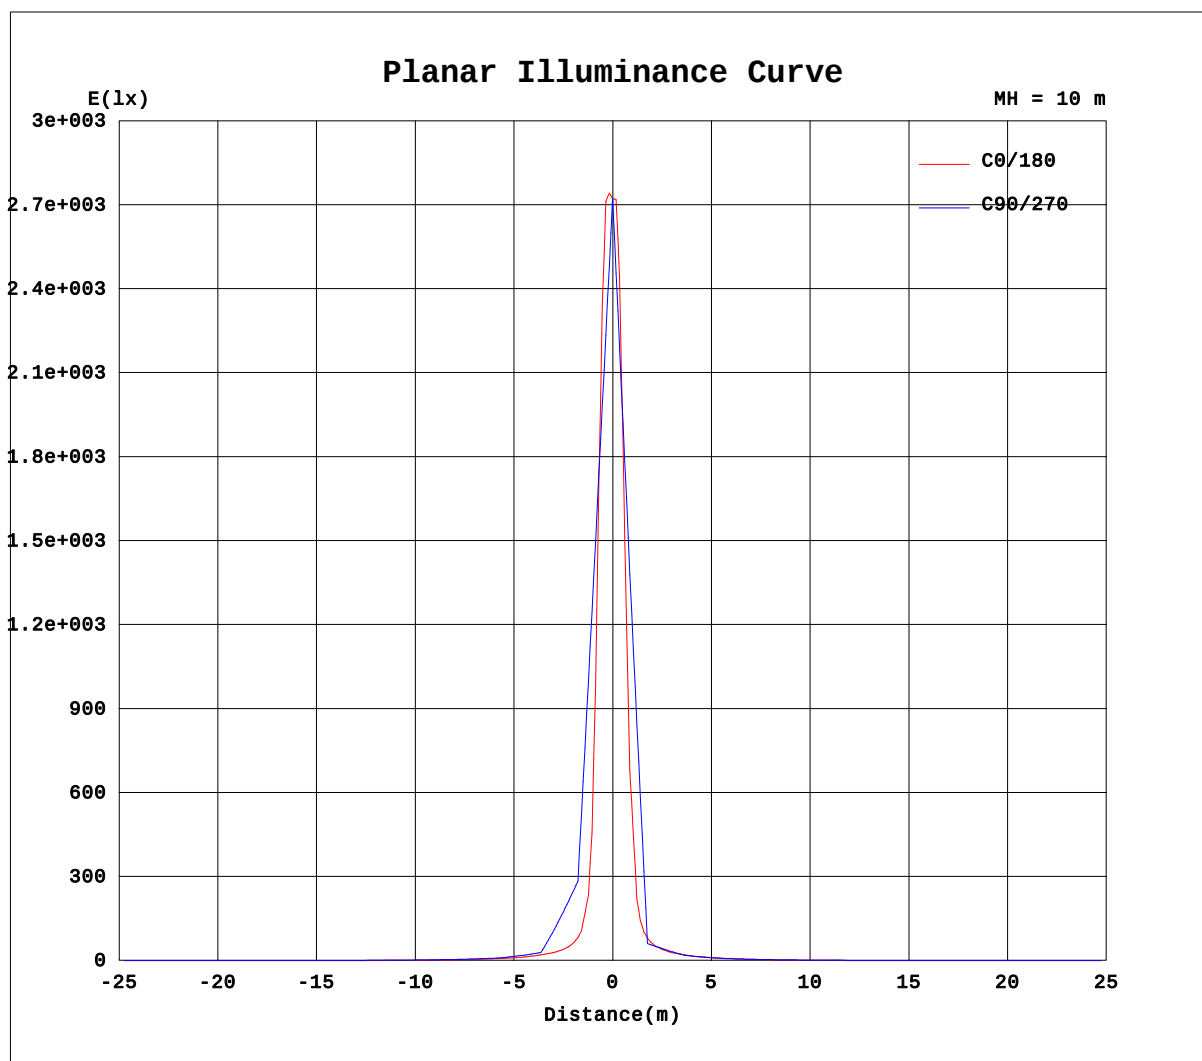

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 28.0DEG
Operators: QC1
Test Date: 2024-08-30

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 83%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.4V I:0.6923A P:147.2W PF:0.9646 Lamp Flux:12530.9x1 lm		
NAME: 8.03.004.0202 3° SP-F310A-40P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024080134
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: ×100cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.08	0.14	0.19	0.23	0.27	0.32	0.35	0.35
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.09	0.17	0.25	0.33	0.43	0.54	0.64	0.74	0.83	0.91	0.97	0.99
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.24	0.41	0.57	0.73	0.88	1.04	1.17	1.32	1.45	1.55	1.62	1.64
-65	0.00	0.00	0.00	0.00	0.00	0.08	0.22	0.43	0.65	0.90	1.18	1.44	1.64	1.80	1.96	2.10	2.21	2.29	2.34
-60	0.00	0.00	0.00	0.00	0.03	0.26	0.52	0.78	1.09	1.46	1.86	2.17	2.38	2.56	2.72	2.85	2.94	3.02	3.04
-55	0.00	0.00	0.00	0.00	0.07	0.31	0.61	0.96	1.40	1.81	2.20	2.54	2.82	3.08	3.33	3.55	3.73	3.88	3.96
-50	0.00	0.00	0.00	0.00	0.27	0.60	0.97	1.46	2.06	2.47	2.82	3.15	3.47	3.79	4.12	4.40	4.65	4.82	4.89
-45	0.00	0.00	0.00	0.01	0.26	0.62	1.07	1.62	2.18	2.65	3.10	3.54	4.02	4.55	5.09	5.60	6.04	6.42	6.61
-40	0.00	0.00	0.00	0.15	0.53	0.99	1.58	2.23	2.72	3.17	3.72	4.32	4.99	5.73	6.48	7.17	7.77	8.21	8.36
-35	0.00	0.00	0.00	0.07	0.46	0.93	1.57	2.25	2.79	3.32	3.96	4.73	5.66	6.74	7.92	9.10	10.2	11.2	11.6
-30	0.00	0.00	0.00	0.28	0.75	1.34	2.12	2.73	3.27	3.94	4.78	5.86	7.16	8.67	10.3	11.9	13.5	14.6	14.9
-25	0.00	0.00	0.00	0.17	0.64	1.22	1.99	2.65	3.25	3.97	4.91	6.15	7.76	9.73	12.1	15.1	19.0	22.7	24.6
-20	0.00	0.00	0.00	0.42	0.96	1.68	2.42	3.04	3.77	4.70	5.96	7.64	9.87	12.6	16.1	21.4	27.7	32.8	34.4
-15	0.00	0.00	0.00	0.25	0.77	1.43	2.23	2.90	3.58	4.48	5.73	7.43	9.75	12.8	17.6	25.2	38.6	72.1	160
-10	0.00	0.00	0.01	0.50	1.06	1.86	2.60	3.25	4.05	5.17	6.73	8.90	11.9	16.2	24.7	37.5	67.9	171	286
-5	0.00	0.00	0.00	0.31	0.85	1.54	2.33	3.01	3.75	4.74	6.15	8.09	10.8	14.7	21.7	33.4	60.5	283	1503
0	0.00	0.00	0.04	0.54	1.12	1.92	2.64	3.31	4.15	5.32	6.97	9.26	12.5	17.5	27.2	44.5	107	1198	2743
5	0.00	0.00	0.00	0.32	0.85	1.54	2.33	2.99	3.71	4.67	6.05	7.94	10.6	14.2	20.4	30.5	52.6	252	1392
10	0.00	0.00	0.03	0.51	1.06	1.85	2.58	3.20	3.95	5.01	6.50	8.54	11.3	14.8	20.7	29.7	41.9	57.7	64.1
15	0.00	0.00	0.00	0.28	0.78	1.42	2.21	2.84	3.48	4.32	5.47	7.04	9.12	11.7	15.2	20.5	27.2	36.4	43.4
20	0.00	0.00	0.00	0.45	0.96	1.65	2.37	2.96	3.62	4.46	5.59	7.07	8.92	11.1	13.6	16.3	19.4	22.2	23.1
25	0.00	0.00	0.00	0.20	0.67	1.20	1.94	2.59	3.15	3.79	4.61	5.69	7.03	8.61	10.4	12.3	14.4	16.4	17.4
30	0.00	0.00	0.00	0.32	0.77	1.32	2.07	2.66	3.16	3.72	4.43	5.32	6.36	7.48	8.70	9.93	11.0	11.7	11.8
35	0.00	0.00	0.00	0.09	0.50	0.95	1.53	2.17	2.70	3.17	3.71	4.34	5.08	5.91	6.80	7.69	8.51	9.11	9.35
40	0.00	0.00	0.00	0.18	0.57	1.00	1.52	2.16	2.62	3.02	3.46	3.93	4.45	5.03	5.61	6.15	6.57	6.80	6.84
45	0.00	0.00	0.00	0.02	0.29	0.67	1.05	1.54	2.05	2.52	2.90	3.27	3.66	4.08	4.50	4.89	5.22	5.44	5.52
50	0.00	0.00	0.00	0.01	0.31	0.63	0.95	1.33	1.88	2.32	2.63	2.91	3.19	3.46	3.71	3.92	4.08	4.17	4.19
55	0.00	0.00	0.00	0.00	0.09	0.34	0.60	0.89	1.25	1.63	1.94	2.24	2.52	2.78	3.00	3.19	3.33	3.41	3.45
60	0.00	0.00	0.00	0.00	0.05	0.25	0.48	0.70	0.94	1.19	1.49	1.80	2.07	2.28	2.46	2.58	2.66	2.70	2.71
65	0.00	0.00	0.00	0.00	0.00	0.08	0.20	0.35	0.54	0.72	0.91	1.13	1.33	1.49	1.62	1.73	1.80	1.84	1.86
70	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.15	0.28	0.40	0.51	0.63	0.72	0.81	0.88	0.94	0.98	1.00	1.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.12	0.18	0.23	0.29	0.34	0.39	0.43	0.46	0.48	0.50	0.50
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-30

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.4V I:0.6923A P:147.2W PF:0.9646 Lamp Flux:12530.9x1 lm		
NAME: 8.03.004.0202 3° SP-F310A-40P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024080134
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2		UNIT: ×100cd																	
H(°)	V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.36	0.37	0.33	0.29	0.26	0.21	0.17	0.11	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	1.00	1.00	0.97	0.90	0.81	0.73	0.63	0.53	0.41	0.30	0.21	0.13	0.05	0.00	0.00	0.00	0.00	0.00	0.00
-70	1.65	1.62	1.55	1.43	1.30	1.17	1.02	0.86	0.70	0.53	0.36	0.19	0.04	0.00	0.00	0.00	0.00	0.00	0.00
-65	2.35	2.32	2.26	2.16	2.03	1.89	1.72	1.52	1.27	0.99	0.73	0.50	0.28	0.10	0.00	0.00	0.00	0.00	0.00
-60	3.04	3.00	2.90	2.79	2.65	2.48	2.27	2.00	1.62	1.24	0.91	0.63	0.35	0.11	0.00	0.00	0.00	0.00	0.00
-55	3.96	3.89	3.74	3.56	3.35	3.12	2.86	2.57	2.23	1.86	1.45	1.02	0.66	0.34	0.08	0.00	0.00	0.00	0.00
-50	4.85	4.70	4.44	4.17	3.87	3.56	3.21	2.88	2.55	2.17	1.65	1.11	0.71	0.34	0.05	0.00	0.00	0.00	0.00
-45	6.59	6.36	5.96	5.49	4.99	4.47	3.97	3.48	3.05	2.64	2.19	1.65	1.06	0.61	0.23	0.00	0.00	0.00	0.00
-40	8.20	7.73	7.11	6.42	5.69	4.97	4.30	3.73	3.22	2.78	2.33	1.70	1.04	0.56	0.17	0.00	0.00	0.00	0.00
-35	11.5	10.9	9.84	8.72	7.53	6.40	5.38	4.51	3.80	3.23	2.72	2.20	1.49	0.87	0.39	0.03	0.00	0.00	0.00
-30	14.5	13.2	11.7	10.1	8.42	6.98	5.73	4.70	3.90	3.24	2.72	2.18	1.39	0.77	0.28	0.00	0.00	0.00	0.00
-25	23.9	21.1	17.2	13.6	11.0	8.88	7.07	5.64	4.55	3.73	3.08	2.54	1.86	1.07	0.51	0.08	0.00	0.00	0.00
-20	31.5	25.9	19.7	15.0	11.8	9.22	7.19	5.64	4.49	3.64	3.00	2.42	1.64	0.89	0.35	0.00	0.00	0.00	0.00
-15	105	50.3	30.9	21.1	14.9	11.4	8.64	6.62	5.16	4.10	3.34	2.72	2.07	1.20	0.59	0.11	0.00	0.00	0.00
-10	119	55.1	32.5	21.7	14.8	11.1	8.30	6.33	4.90	3.89	3.14	2.54	1.79	0.98	0.40	0.00	0.00	0.00	0.00
-5	941	91.7	42.2	26.6	17.4	12.6	9.38	7.06	5.43	4.25	3.44	2.78	2.14	1.25	0.61	0.12	0.00	0.00	0.00
0	467	70.3	35.9	23.5	15.3	11.2	8.36	6.37	4.92	3.90	3.17	2.55	1.79	0.97	0.39	0.00	0.00	0.00	0.00
5	882	76.9	37.3	24.3	16.4	12.0	9.02	6.84	5.28	4.16	3.37	2.74	2.09	1.21	0.58	0.11	0.00	0.00	0.00
10	52.3	36.4	25.9	18.0	13.3	10.2	7.72	5.96	4.65	3.74	3.03	2.44	1.68	0.92	0.36	0.00	0.00	0.00	0.00
15	40.3	31.0	22.9	17.2	12.9	10.1	7.81	6.08	4.79	3.85	3.16	2.58	1.92	1.09	0.51	0.07	0.00	0.00	0.00
20	21.2	18.0	15.0	12.4	10.1	8.03	6.40	5.09	4.11	3.38	2.81	2.25	1.42	0.77	0.27	0.00	0.00	0.00	0.00
25	16.9	15.1	13.0	11.0	9.22	7.58	6.17	5.01	4.11	3.40	2.85	2.32	1.60	0.90	0.40	0.02	0.00	0.00	0.00
30	11.4	10.6	9.42	8.19	7.02	5.94	4.96	4.16	3.52	2.96	2.48	1.88	1.14	0.60	0.18	0.00	0.00	0.00	0.00
35	9.19	8.72	8.00	7.12	6.23	5.40	4.63	3.96	3.41	2.91	2.44	1.87	1.19	0.66	0.25	0.00	0.00	0.00	0.00
40	6.68	6.35	5.89	5.35	4.77	4.23	3.74	3.30	2.90	2.48	1.99	1.30	0.79	0.37	0.05	0.00	0.00	0.00	0.00
45	5.47	5.29	5.00	4.64	4.24	3.81	3.42	3.05	2.68	2.26	1.80	1.26	0.78	0.40	0.09	0.00	0.00	0.00	0.00
50	4.14	4.02	3.83	3.61	3.37	3.06	2.80	2.51	2.15	1.67	1.20	0.80	0.45	0.16	0.00	0.00	0.00	0.00	0.00
55	3.43	3.37	3.25	3.07	2.87	2.61	2.34	2.06	1.75	1.40	1.03	0.68	0.39	0.14	0.00	0.00	0.00	0.00	0.00
60	2.69	2.64	2.53	2.37	2.18	1.93	1.66	1.37	1.09	0.82	0.57	0.33	0.12	0.00	0.00	0.00	0.00	0.00	0.00
65	1.85	1.82	1.76	1.66	1.53	1.37	1.19	0.99	0.79	0.58	0.39	0.21	0.10	0.00	0.00	0.00	0.00	0.00	0.00
70	0.99	0.96	0.91	0.85	0.76	0.67	0.57	0.44	0.32	0.18	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.50	0.49	0.47	0.44	0.40	0.35	0.30	0.25	0.19	0.11	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-08-30

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: