

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		5864.6 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	38.3V x 38.3H
	At 50% of Imax	13.6V x 17.1H
	At 90% of Imax	4.1V x 6.6H
Beam Flux	Total	998.9 lumens per klm.
	To 10% of Imax	628.9 lumens per klm.
	To 50% of Imax	241.6 lumens per klm.
	To 90% of Imax	23.0 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-04

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.5V I:0.4459A P:91.89W PF:0.9346 Lamp Flux:6036.94x1 lm		
NAME: 8.03.004.0203 15° SP-F310A-52P-DMX	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090029
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

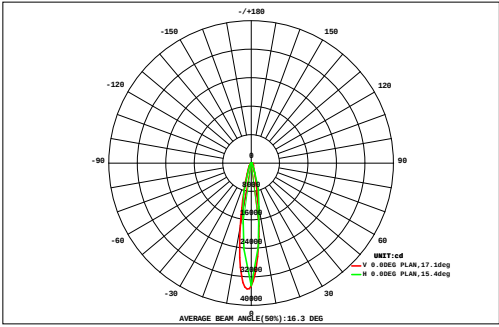

DATA OF LAMP		Eff:65.70lm/W	
MODEL	SP-F310A-52P-DMX	Imax(cd)	35404
NOMINAL POWER(W)	92	AVAILABILITY(%)	64.2
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	3875
NOMINAL FLUX(lm)	6036.94	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	6037
TEST VOLTAGE(V)	220.5	θ @50%(H,V)	17,14DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT: lm				Φ t	Φ a
	27	2.31	2.70	3.05	3.37	3.68	4.00	4.29	4.52	4.64	4.63	4.49	4.24	3.91	3.56	3.17	2.77	2.35	1.95	63.7	0.00	
	24	2.19	2.67	3.22	3.81	4.42	5.07	5.73	6.34	6.77	6.94	6.80	6.39	5.80	5.15	4.49	3.88	3.31	2.76	85.7	0.00	
	21	2.87	3.48	4.16	4.92	5.75	6.59	7.39	8.00	8.30	8.20	7.76	7.05	6.23	5.39	4.60	3.88	3.23	2.66	100	0.00	
	18	3.64	4.36	5.18	6.13	7.16	8.20	9.13	9.72	9.84	9.44	8.66	7.62	6.57	5.54	4.62	3.80	3.08	2.48	115	16.7	
	15	3.02	3.85	4.92	6.36	8.38	11.3	15.1	19.7	23.7	25.5	24.1	20.3	15.8	11.8	8.82	6.67	5.16	4.03	218	172	
	12	3.53	4.61	6.08	8.17	11.2	15.6	21.3	27.4	31.8	32.7	29.6	24.0	18.1	13.2	9.66	7.20	5.50	4.26	274	232	
	9	5.11	6.73	9.05	12.5	17.6	24.6	32.9	39.7	42.0	38.3	30.6	22.2	15.6	11.0	7.88	5.88	4.45	3.41	330	291	
	6	4.31	5.69	7.66	10.7	15.5	23.3	35.1	49.3	60.2	62.7	55.7	43.1	29.4	19.0	12.4	8.49	6.13	4.55	453	418	
	3	3.30	4.37	5.88	8.41	12.7	21.1	36.6	58.9	79.5	89.2	83.5	66.3	44.8	28.0	17.4	11.4	8.02	5.85	585	553	
	0	5.68	7.87	11.6	18.1	30.3	51.6	79.8	102	108	94.9	70.7	44.3	25.8	15.3	9.98	7.03	5.13	3.82	692	661	
	-3	5.48	7.55	11.1	17.2	28.6	48.5	75.1	97.0	104	92.6	70.2	45.0	26.7	16.0	10.4	7.29	5.31	3.94	672	639	
-6	2.98	3.77	4.62	5.73	6.91	8.94	14.9	28.4	45.2	57.3	58.6	50.5	36.3	23.7	15.2	10.2	7.25	5.35	386	345		
-9	3.78	4.84	6.20	8.08	10.5	13.9	18.6	25.5	32.5	36.0	34.1	28.6	21.1	14.7	10.1	7.24	5.38	4.08	285	246		
-12	4.78	6.23	8.28	11.2	15.6	20.8	25.1	25.3	20.9	13.6	7.09	4.16	3.68	4.21	4.18	3.80	3.18	2.59	185	138		
-15	2.54	3.13	3.82	4.65	5.71	7.21	9.53	12.9	16.7	19.4	19.7	17.4	14.0	10.7	8.08	6.15	4.80	3.78	170	115		
-18	2.20	2.60	2.96	3.25	3.37	3.43	3.84	5.31	8.02	11.0	12.7	12.3	10.6	8.48	6.71	5.26	4.19	3.36	110	48.0		
-21	2.90	3.40	3.93	4.43	4.80	4.85	4.34	3.20	2.07	1.48	1.31	1.49	1.85	2.32	2.48	2.40	2.14	1.84	51.2	0.00		
-24	2.20	2.59	2.99	3.36	3.63	3.71	3.49	3.22	3.44	3.58	3.56	3.40	3.14	2.89	2.83	2.65	2.36	2.03	55.1	0.00		
-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)				6	9	12	15	18	21	24	27		
Φ t	62.8	80.4	105	140	196	283	402	527	607	607	529	409	289	201	143	106	81.0	62.7	4832	---		
Φ a	0.00	4.29	29.5	77.0	142	238	360	489	573	572	492	373	256	167	70.0	30.1	1.04	0.00	---	3875		


one-half-peak spread: U:7.1,D:6.7 , L:8.1,R:9.1 NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-04

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.5V I:0.4459A P:91.89W PF:0.9346 Lamp Flux:6036.94x1 lm		
NAME: 8.03.004.0203 15° SP-F310A-52P-DMX	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090029
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

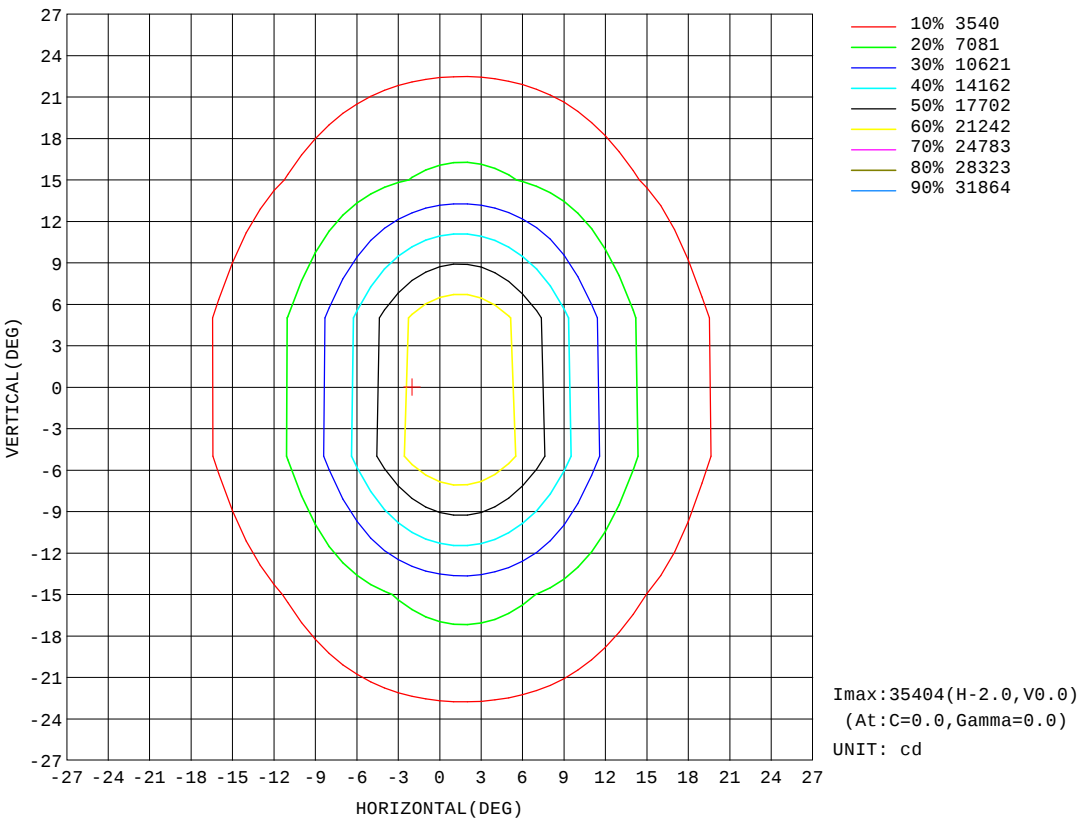


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-04

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.5V I:0.4459A P:91.89W PF:0.9346 Lamp Flux:6036.94x1 lm		
NAME: 8.03.004.0203 15° SP-F310A-52P-DMX	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090029
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

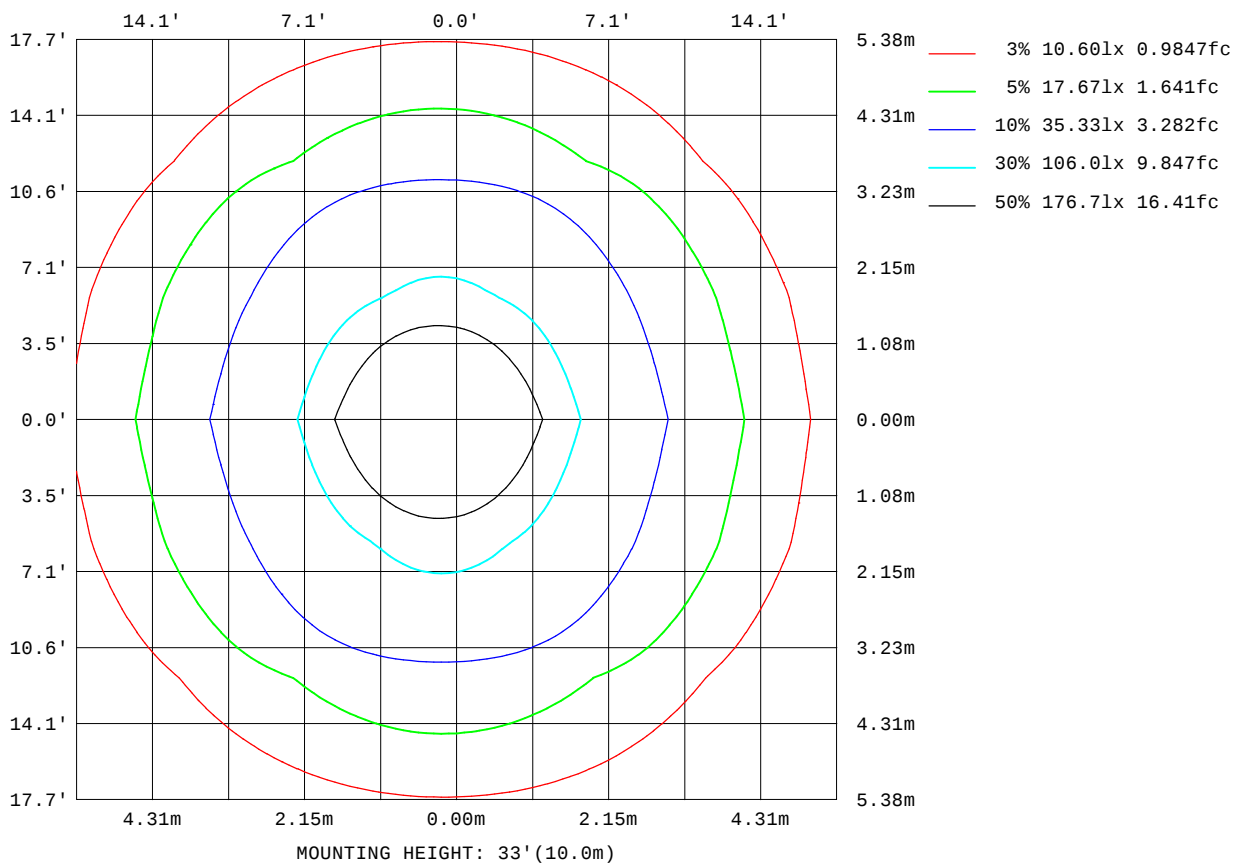


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-04

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.5V I:0.4459A P:91.89W PF:0.9346 Lamp Flux:6036.94x1 lm		
NAME: 8.03.004.0203 15° SP-F310A-52P-DMX	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090029
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

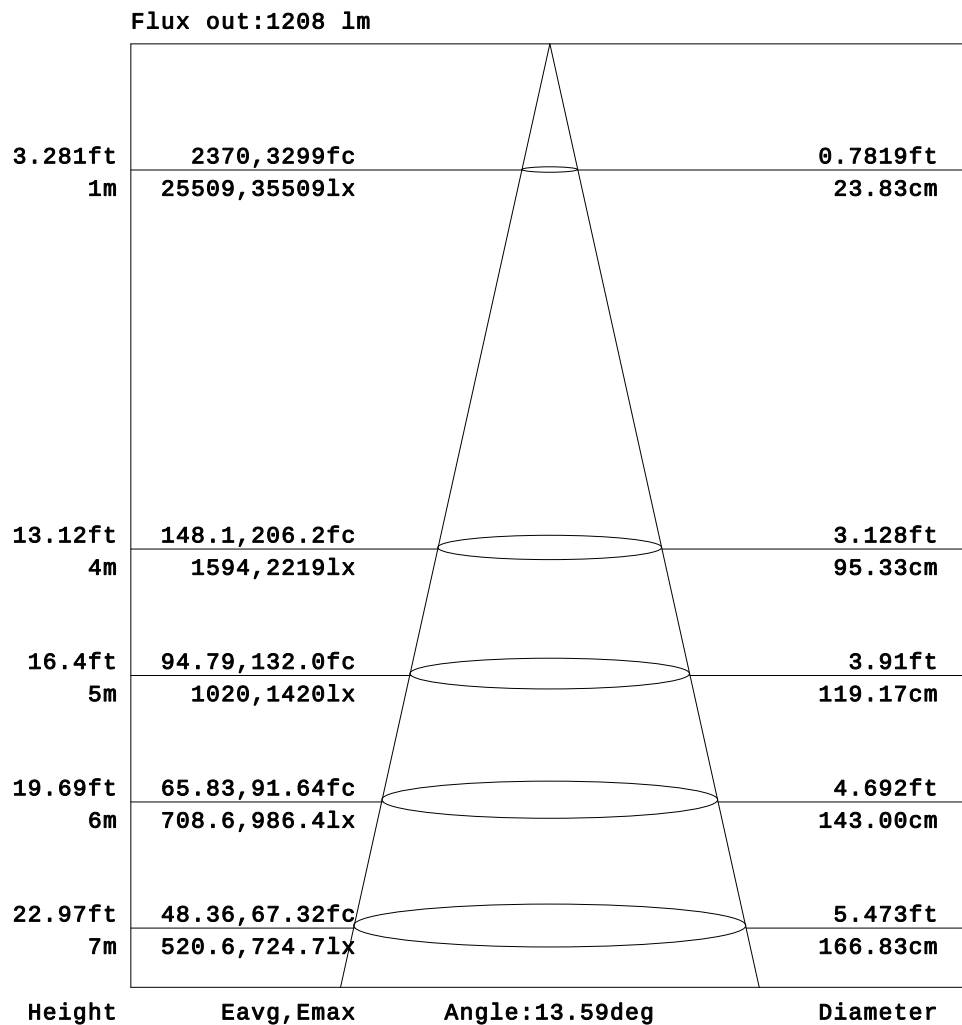


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-04

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

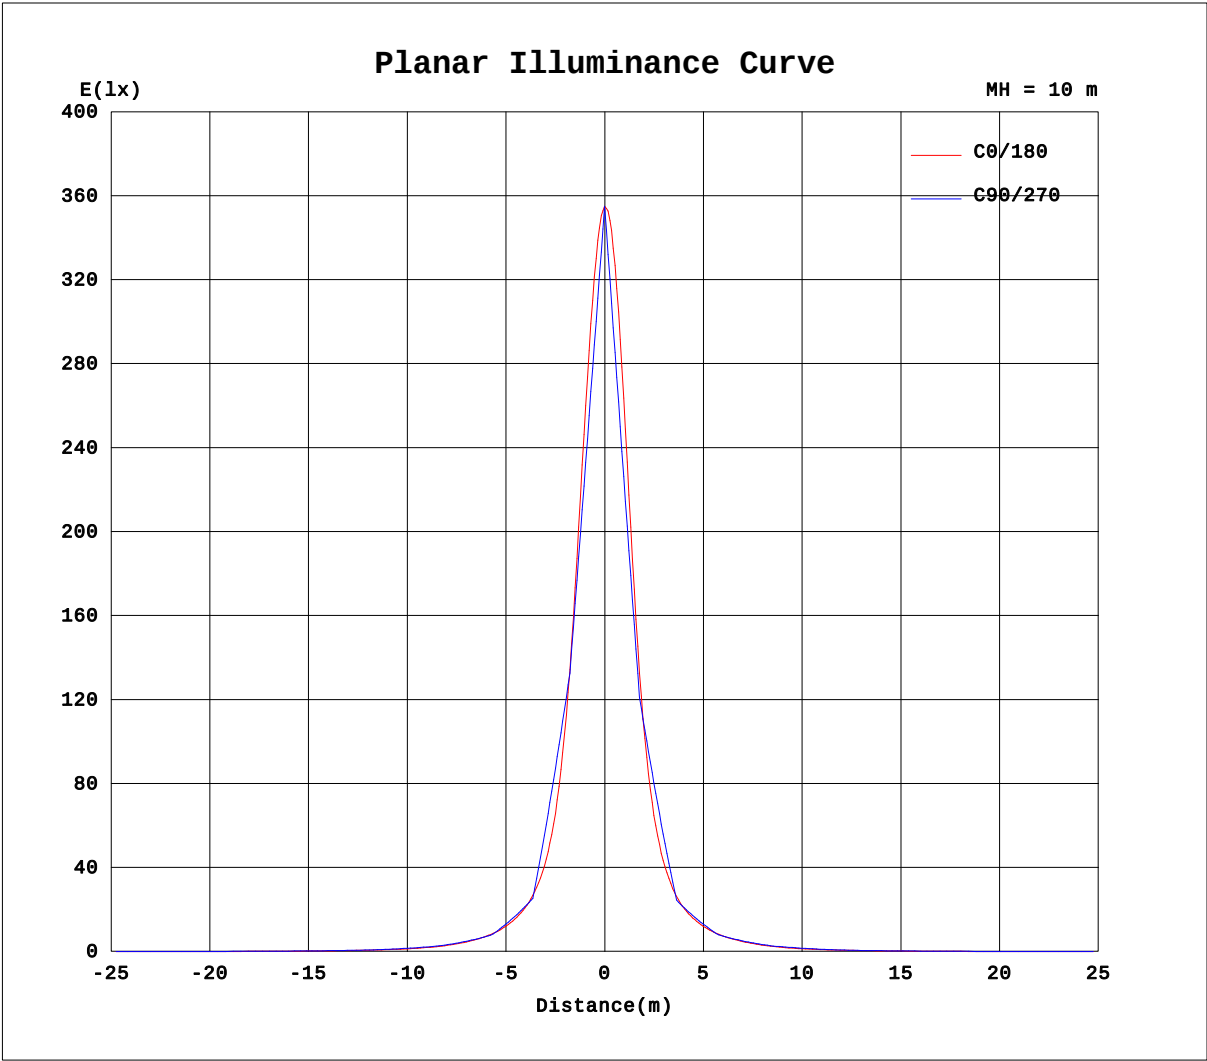

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-04

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.5V I:0.4459A P:91.89W PF:0.9346 Lamp Flux:6036.94x1 lm		
NAME: 8.03.004.0203 15° SP-F310A-52P-DMX	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090029
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: ×10cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.30	0.51	0.71	0.95	1.21	1.30	1.30
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.27	0.74	1.24	1.68	2.09	2.53	3.06	3.55	4.08	4.46	4.70	4.77
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.24	1.09	2.08	3.02	3.87	4.61	5.41	6.18	7.04	7.70	8.04	8.23	8.23
-65	0.00	0.00	0.00	0.00	0.00	0.07	0.67	1.70	2.98	4.21	5.36	6.48	7.58	8.77	10.0	11.1	11.8	12.2	12.4
-60	0.00	0.00	0.00	0.00	0.00	0.82	2.25	3.87	5.35	6.77	8.21	9.65	11.2	12.9	14.4	15.4	16.1	16.5	16.6
-55	0.00	0.00	0.00	0.00	0.07	0.93	2.61	4.51	6.39	8.23	10.1	12.1	14.2	16.6	18.9	20.8	22.2	23.2	23.6
-50	0.00	0.00	0.00	0.00	1.00	2.98	5.26	7.45	9.62	11.9	14.4	16.9	20.0	23.2	25.8	27.9	29.6	30.6	30.6
-45	0.00	0.00	0.00	0.00	0.70	2.79	5.35	7.91	10.5	13.3	16.3	19.8	24.1	29.6	34.9	39.2	42.4	44.9	46.0
-40	0.00	0.00	0.00	0.51	2.73	5.65	8.54	11.4	14.7	18.2	22.3	27.6	34.7	42.5	49.4	54.5	58.5	61.0	61.2
-35	0.00	0.00	0.00	0.06	1.86	4.84	8.11	11.4	15.1	19.3	24.3	31.1	40.4	52.1	64.2	73.9	81.1	87.1	90.5
-30	0.00	0.00	0.00	1.34	4.45	8.01	11.6	15.5	20.4	26.1	34.0	45.2	59.9	76.4	91.3	102	111	118	120
-25	0.00	0.00	0.00	0.34	3.04	6.68	10.5	14.5	19.5	25.5	34.1	46.7	63.7	84.6	109	135	164	193	212
-20	0.00	0.00	0.00	2.24	5.95	9.83	14.1	19.2	25.4	34.6	48.3	67.5	91.9	121	158	202	253	295	305
-15	0.00	0.00	0.00	0.75	3.96	7.91	12.1	17.0	23.0	31.1	43.7	62.8	88.7	124	175	257	403	633	830
-10	0.00	0.00	0.06	2.80	6.66	10.8	15.7	21.6	29.5	41.4	60.5	87.2	125	183	280	466	814	1246	1371
-5	0.00	0.00	0.00	1.08	4.47	8.53	13.0	18.3	25.0	34.9	50.2	74.1	107	157	243	417	832	1686	2421
0	0.00	0.00	0.22	3.13	7.12	11.4	16.4	22.6	31.3	44.9	66.7	97.8	144	222	381	773	1785	3176	3451
5	0.00	0.00	0.00	1.15	4.56	8.62	13.0	18.4	25.2	35.1	50.4	74.4	108	158	244	417	824	1654	2362
10	0.00	0.00	0.16	2.95	6.84	11.0	15.8	21.9	29.8	41.8	61.0	88.3	127	186	282	459	773	1146	1250
15	0.00	0.00	0.00	0.98	4.20	8.14	12.3	17.3	23.4	31.6	44.2	63.6	90.1	126	178	259	395	599	767
20	0.00	0.00	0.08	2.58	6.21	10.1	14.4	19.6	26.0	35.2	49.0	68.7	94.1	125	161	204	251	287	294
25	0.00	0.00	0.00	0.60	3.42	7.03	10.8	15.0	20.0	26.2	34.9	47.6	65.1	87.1	112	139	166	193	209
30	0.00	0.00	0.00	1.75	4.86	8.37	12.0	16.1	21.0	26.9	34.8	46.3	61.6	79.4	94.9	106	115	121	123
35	0.00	0.00	0.00	0.16	2.30	5.32	8.57	11.9	15.8	20.1	25.4	32.3	42.0	54.2	66.8	76.7	84.0	90.1	93.1
40	0.00	0.00	0.00	0.86	3.24	6.17	9.13	12.2	15.6	19.3	23.7	29.2	36.6	44.4	51.4	56.8	61.0	63.2	63.1
45	0.00	0.00	0.00	0.00	1.05	3.25	5.83	8.44	11.1	14.0	17.2	20.8	25.4	30.8	36.2	40.4	43.8	46.2	47.1
50	0.00	0.00	0.00	0.00	1.36	3.39	5.68	7.88	10.1	12.5	14.9	17.6	20.7	23.8	26.3	28.3	29.8	30.6	30.6
55	0.00	0.00	0.00	0.00	0.19	1.17	2.88	4.76	6.64	8.50	10.4	12.4	14.5	16.8	19.1	20.8	22.1	23.0	23.4
60	0.00	0.00	0.00	0.00	0.00	0.95	2.35	3.91	5.38	6.79	8.21	9.61	11.1	12.7	14.1	15.0	15.7	16.0	16.0
65	0.00	0.00	0.00	0.00	0.00	0.12	0.74	1.50	2.64	3.77	4.89	5.94	6.96	8.04	9.16	10.1	10.7	11.1	11.3
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.46	1.25	2.12	2.84	3.49	4.12	4.72	5.44	6.03	6.34	6.50	6.50
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.38	0.79	1.22	1.55	1.87	2.18	2.49	2.86	3.08	3.21	3.26
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-04

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.5V I:0.4459A P:91.89W PF:0.9346 Lamp Flux:6036.94x1 lm		
NAME: 8.03.004.0203 15° SP-F310A-52P-DMX	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090029
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																		UNIT: ×10cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	1.28	1.12	0.85	0.66	0.47	0.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	4.75	4.62	4.31	3.88	3.37	2.91	2.40	1.95	1.56	1.09	0.60	0.18	0.00	0.00	0.00	0.00	0.00	0.00	
-70	8.10	7.79	7.30	6.48	5.71	4.96	4.20	3.45	2.59	1.59	0.66	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-65	12.4	12.1	11.6	10.8	9.72	8.53	7.41	6.34	5.24	4.08	2.89	1.68	0.75	0.17	0.00	0.00	0.00	0.00	
-60	16.4	15.8	15.0	13.9	12.3	10.7	9.33	7.93	6.54	5.15	3.64	2.06	0.77	0.00	0.00	0.00	0.00	0.00	
-55	23.5	22.8	21.7	20.3	18.4	16.1	13.8	11.9	10.0	8.18	6.39	4.56	2.71	1.09	0.14	0.00	0.00	0.00	
-50	29.9	28.5	26.7	24.6	21.8	18.7	15.9	13.6	11.3	9.05	6.96	4.83	2.63	0.85	0.00	0.00	0.00	0.00	
-45	45.5	43.7	40.7	37.0	32.6	27.6	22.9	19.0	15.8	12.8	10.1	7.67	5.22	2.75	0.75	0.00	0.00	0.00	
-40	59.2	55.5	50.4	44.3	37.5	30.7	24.9	20.4	16.8	13.3	10.3	7.59	4.79	2.09	0.16	0.00	0.00	0.00	
-35	89.9	85.3	78.2	69.7	58.9	47.3	36.8	28.6	22.6	18.0	14.1	10.7	7.63	4.52	1.71	0.04	0.00	0.00	
-30	116	107	96.2	82.7	66.4	50.8	38.3	29.1	22.8	17.9	13.8	10.1	6.78	3.39	0.80	0.00	0.00	0.00	
-25	208	186	155	126	99.4	75.5	55.7	40.7	30.3	23.3	17.9	13.3	9.52	5.97	2.54	0.20	0.00	0.00	
-20	277	228	179	137	103	75.5	53.9	38.8	28.7	21.9	16.4	11.9	8.05	4.29	1.21	0.00	0.00	0.00	
-15	788	559	352	228	156	110	77.0	53.5	37.7	27.6	20.8	15.3	10.9	6.98	3.19	0.45	0.00	0.00	
-10	1039	621	360	225	149	102	69.7	47.7	33.7	24.6	18.3	13.2	8.97	5.00	1.58	0.00	0.00	0.00	
-5	2199	1325	642	340	208	136	91.6	62.0	42.3	30.2	22.3	16.4	11.5	7.45	3.50	0.58	0.00	0.00	
0	2364	1103	501	276	172	112	75.1	50.4	35.1	25.5	18.9	13.4	9.07	5.03	1.57	0.00	0.00	0.00	
5	2143	1293	629	335	206	135	90.9	61.5	42.0	30.0	22.1	16.3	11.4	7.37	3.43	0.53	0.00	0.00	
10	954	582	344	219	147	101	68.7	47.1	33.2	24.3	18.1	13.1	8.82	4.86	1.47	0.00	0.00	0.00	
15	726	522	337	222	153	108	75.6	52.7	37.2	27.3	20.5	15.1	10.7	6.79	3.02	0.34	0.00	0.00	
20	267	222	176	135	101	74.2	52.9	38.1	28.3	21.6	16.2	11.7	7.84	4.08	1.07	0.00	0.00	0.00	
25	204	182	154	125	98.4	74.4	54.7	40.0	29.8	23.0	17.7	13.1	9.33	5.71	2.33	0.10	0.00	0.00	
30	118	109	97.1	82.6	65.5	50.0	37.7	28.7	22.5	17.7	13.5	9.91	6.52	3.12	0.61	0.00	0.00	0.00	
35	91.8	87.0	79.6	70.6	59.2	47.2	36.6	28.5	22.5	17.9	14.0	10.5	7.41	4.20	1.47	0.00	0.00	0.00	
40	60.9	56.9	51.8	45.5	38.2	31.0	25.1	20.6	16.8	13.3	10.2	7.39	4.45	1.78	0.04	0.00	0.00	0.00	
45	46.4	44.4	41.4	37.7	33.1	27.8	22.9	19.0	15.7	12.7	9.94	7.42	4.88	2.39	0.52	0.00	0.00	0.00	
50	29.8	28.5	26.7	24.6	21.7	18.5	15.8	13.3	11.0	8.74	6.62	4.40	2.23	0.57	0.00	0.00	0.00	0.00	
55	23.1	22.5	21.4	19.9	18.0	15.6	13.4	11.4	9.54	7.69	5.90	4.06	2.26	0.76	0.03	0.00	0.00	0.00	
60	15.7	15.2	14.3	13.1	11.5	10.00	8.63	7.24	5.87	4.49	2.95	1.50	0.37	0.00	0.00	0.00	0.00	0.00	
65	11.2	10.9	10.4	9.63	8.57	7.45	6.43	5.42	4.38	3.28	2.18	1.17	0.50	0.01	0.00	0.00	0.00	0.00	
70	6.38	6.09	5.61	4.89	4.31	3.66	3.03	2.36	1.57	0.76	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	3.24	3.14	2.97	2.66	2.33	2.03	1.70	1.38	1.03	0.62	0.23	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-04

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: