

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	4892.1 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	45.9V x 44.1H
	At 50% of Imax	18.4V x 18.5H
	At 90% of Imax	4.4V x 6.8H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	700.7 lumens per klm.
	To 50% of Imax	264.1 lumens per klm.
	To 90% of Imax	24.3 lumens per klm.

Upward LOR	0.0 %
Downward LOR	100.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-21

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.3V I:0.3429A P:73.11W PF:1.000 Freq:60.00Hz Lamp Flux:5227.27x1 lm		
NAME: 8.03.004.0205 15° SP-F310A-36P-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411059
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

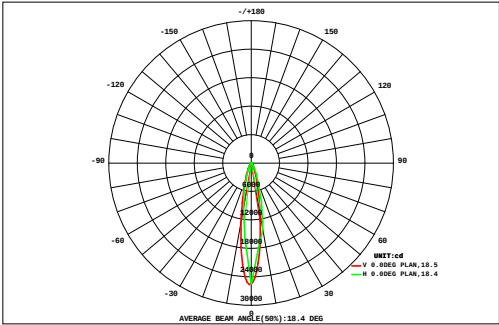

DATA OF LAMP		Eff:71.49lm/W	
MODEL	SP-F310A-36P-RDM	Imax(cd)	25573
NOMINAL POWER(W)	73	AVAILABILITY(%)	70.8
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	3703
NOMINAL FLUX(lm)	5227.27	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	5227
TEST VOLTAGE(V)	220	θ @50%(H,V)	18,18DEG


		AREA FLUX DIAGRAM															UNIT:lm			Φ t	Φ a
VERTICAL (DEG)	27	1.46	1.76	2.11	2.49	2.89	3.28	3.64	3.94	4.12	4.18	4.09	3.87	3.55	3.18	2.77	2.37	1.99	1.64	53.3	0.00
	24	1.47	1.86	2.34	2.91	3.56	4.27	4.99	5.67	6.19	6.48	6.50	6.24	5.74	5.10	4.43	3.74	3.10	2.53	77.1	2.34
	21	2.06	2.62	3.29	4.08	4.95	5.85	6.72	7.42	7.86	7.95	7.69	7.12	6.34	5.50	4.64	3.83	3.11	2.48	93.5	38.5
	18	2.71	3.44	4.33	5.35	6.44	7.54	8.54	9.25	9.56	9.43	8.84	7.93	6.86	5.80	4.75	3.83	3.03	2.37	110	65.1
	15	2.17	2.87	3.83	5.06	6.66	8.73	11.3	14.4	17.3	19.4	19.8	18.4	15.6	12.5	9.65	7.29	5.58	4.27	185	158
	12	2.62	3.54	4.80	6.44	8.65	11.6	15.2	19.3	22.9	25.0	24.7	22.2	18.3	14.3	10.8	8.03	6.07	4.60	229	204
	9	4.00	5.48	7.36	9.88	13.2	17.6	22.8	27.8	31.0	31.1	27.8	22.6	17.1	12.5	8.97	6.66	4.96	3.69	275	253
	6	3.33	4.55	6.19	8.46	11.8	16.5	23.0	31.3	39.7	45.4	45.3	39.2	30.2	21.5	14.9	10.3	7.25	5.23	364	346
	3	2.49	3.37	4.69	6.62	9.78	14.7	22.6	34.5	48.8	60.7	64.4	57.6	44.6	31.5	21.6	14.3	9.84	6.98	459	444
	0	4.57	6.35	9.01	13.4	20.3	30.8	46.2	63.4	75.8	76.6	64.7	46.9	31.2	20.4	13.1	8.87	6.22	4.50	542	526
	-3	4.43	6.14	8.69	12.9	19.4	29.5	44.3	61.1	73.8	75.8	65.4	48.6	33.0	21.8	14.2	9.57	6.66	4.79	540	523
	-6	2.31	3.09	4.11	5.28	7.09	9.84	14.1	21.5	32.5	44.2	51.2	49.2	40.1	29.3	20.5	13.9	9.58	6.79	365	346
-9	3.10	4.19	5.59	7.46	10.2	14.2	19.3	25.7	32.2	37.0	37.7	33.8	26.8	19.7	14.1	9.89	7.06	5.11	313	291	
-12	4.09	5.56	7.47	10.2	14.3	20.0	26.6	32.0	33.7	30.1	23.0	16.1	11.5	8.56	6.58	5.12	4.07	3.11	262	235	
-15	1.94	2.54	3.31	4.25	5.40	6.97	9.21	12.3	16.1	19.9	21.9	21.4	18.6	14.9	11.4	8.62	6.40	4.80	190	161	
-18	1.67	2.11	2.66	3.20	3.68	4.14	4.83	6.13	8.38	11.5	14.1	15.0	14.0	11.8	9.43	7.32	5.53	4.20	130	96.2	
-21	2.46	3.09	3.84	4.69	5.53	6.21	6.58	6.32	5.57	4.39	3.44	3.05	3.12	3.27	3.14	2.82	2.37	1.94	71.8	9.97	
-24	1.72	2.16	2.66	3.23	3.81	4.31	4.64	4.67	4.43	4.35	4.53	4.46	4.18	3.82	3.57	3.18	2.70	2.22	64.6	4.71	
-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)				6	9	12	15	18	21	24	27	
Φ t	48.6	64.7	86.3	116	158	216	294	387	470	513	495	424	331	245	178	130	95.5	71.2	4324	---	
Φ a	0.00	8.03	36.2	66.0	115	186	269	364	450	497	481	406	304	215	150	97.1	42.2	15.8	---	3703	

one-half-peak spread: U:11.7,D:6.9 , L:9.8,R:8.9 NEMA Beam Type: Type 3

V(β) Range:-90 - 90DEG	V(B) Range:-80 - 80DEG
H(β) Interval: 1.0DEG	V(B) Interval: 5.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Temperature:28.0DEG	Humidity:83%
Operators:QC1	Test Distance:8.300m [K=1.0000]
Test Date:2024-11-21	Remarks:

ISOCANDELA DIAGRAM

Test:U:220.3V I:0.3429A P:73.11W PF:1.000 Freq:60.00Hz Lamp Flux:5227.27x1 lm		
NAME: 8.03.004.0205 15° SP-F310A-36P-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411059
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

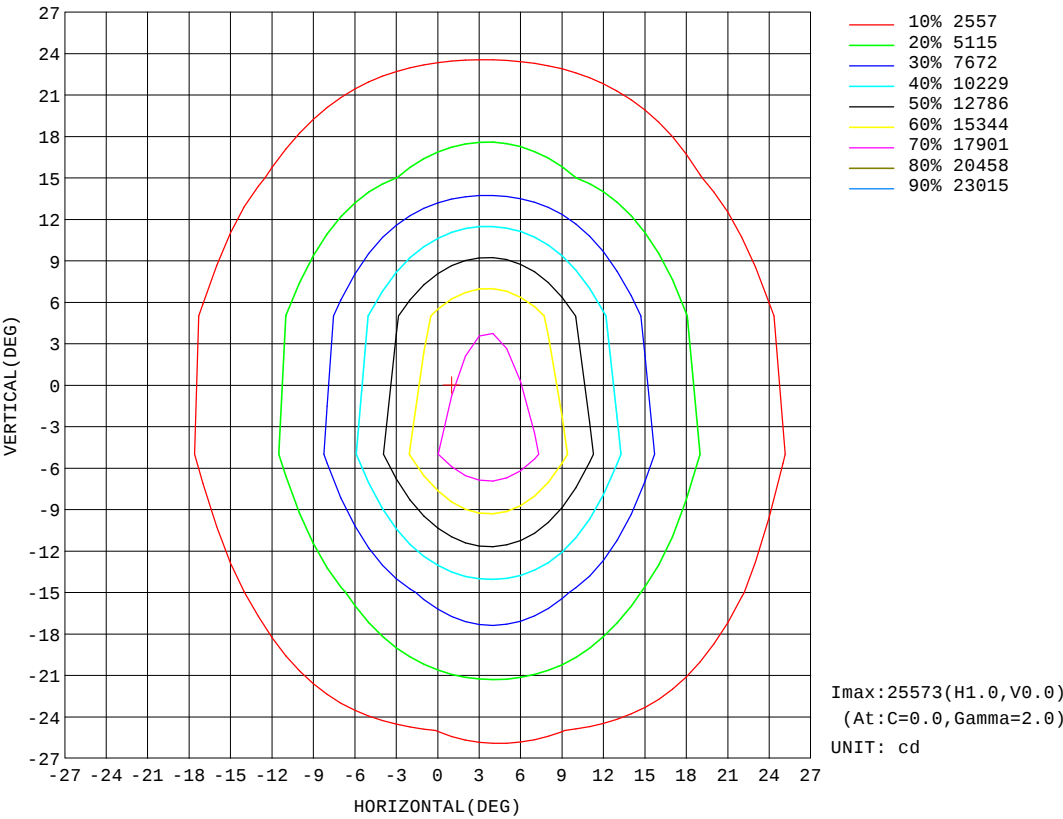


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-21

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.3V I:0.3429A P:73.11W PF:1.000 Freq:60.00Hz Lamp Flux:5227.27x1 lm		
NAME: 8.03.004.0205 15° SP-F310A-36P-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411059
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

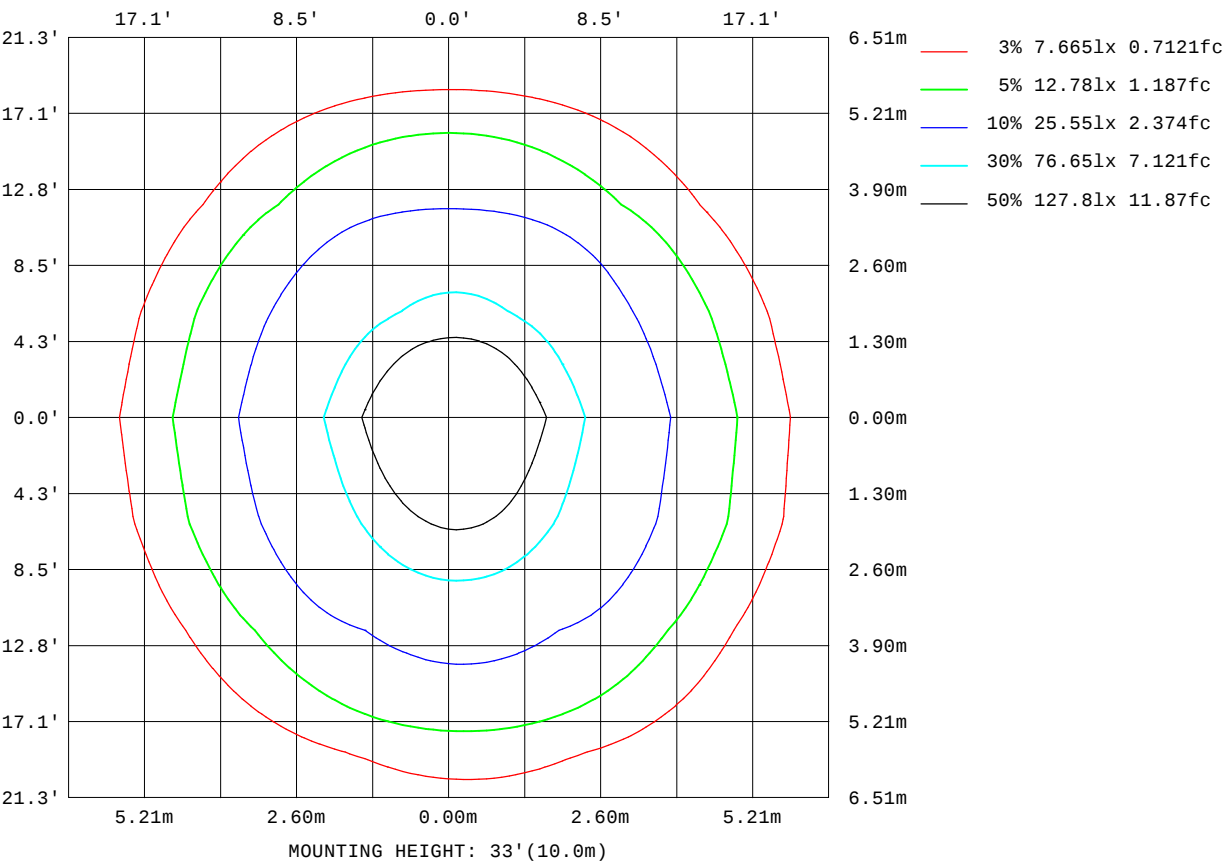

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-21

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

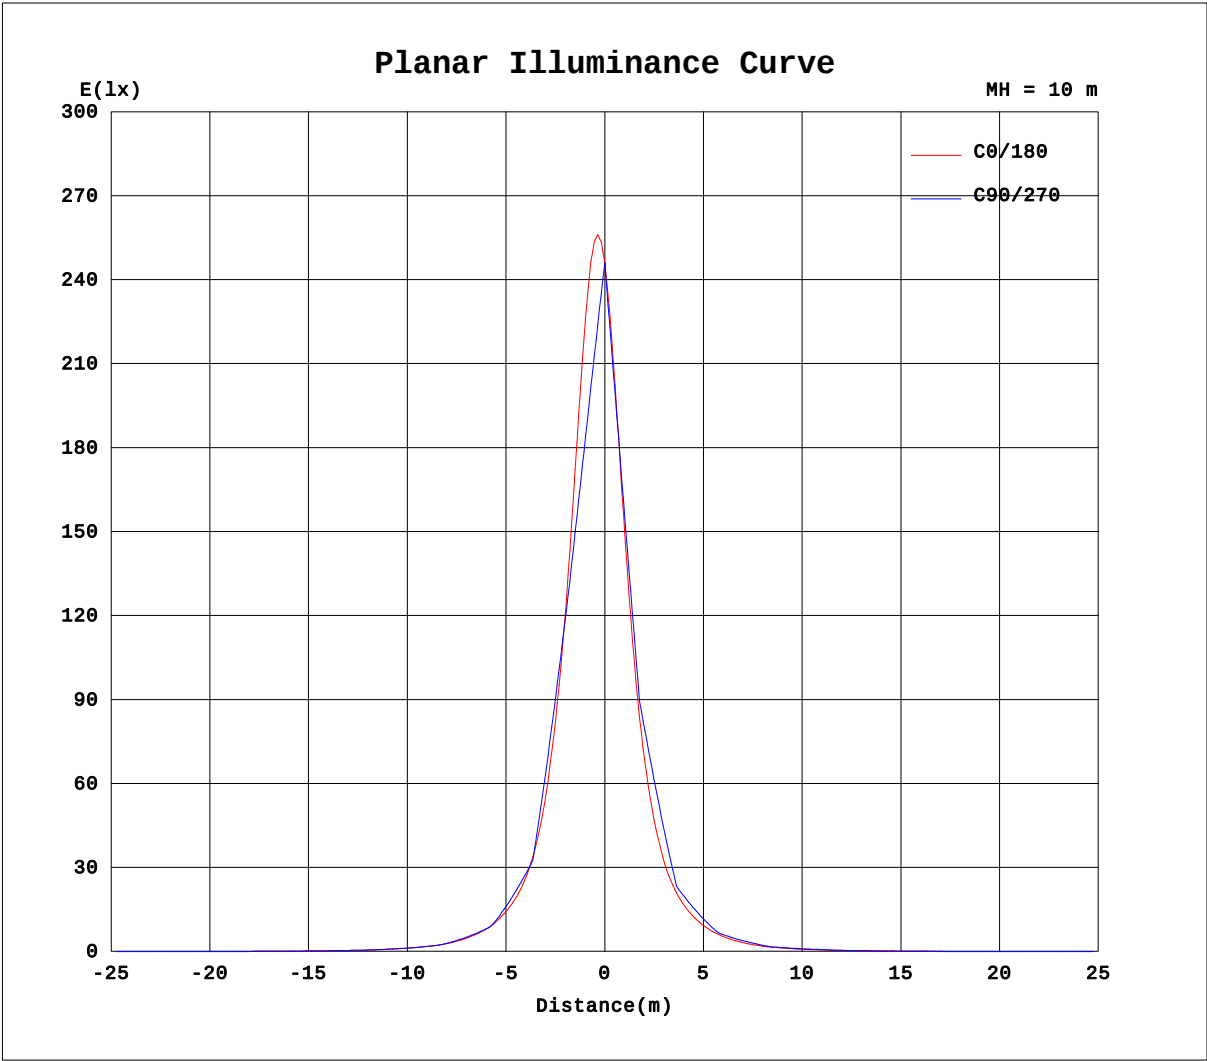


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-21

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.3V I:0.3429A P:73.11W PF:1.000 Freq:60.00Hz Lamp Flux:5227.27x1 lm		
NAME: 8.03.004.0205 15° SP-F310A-36P-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411059
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

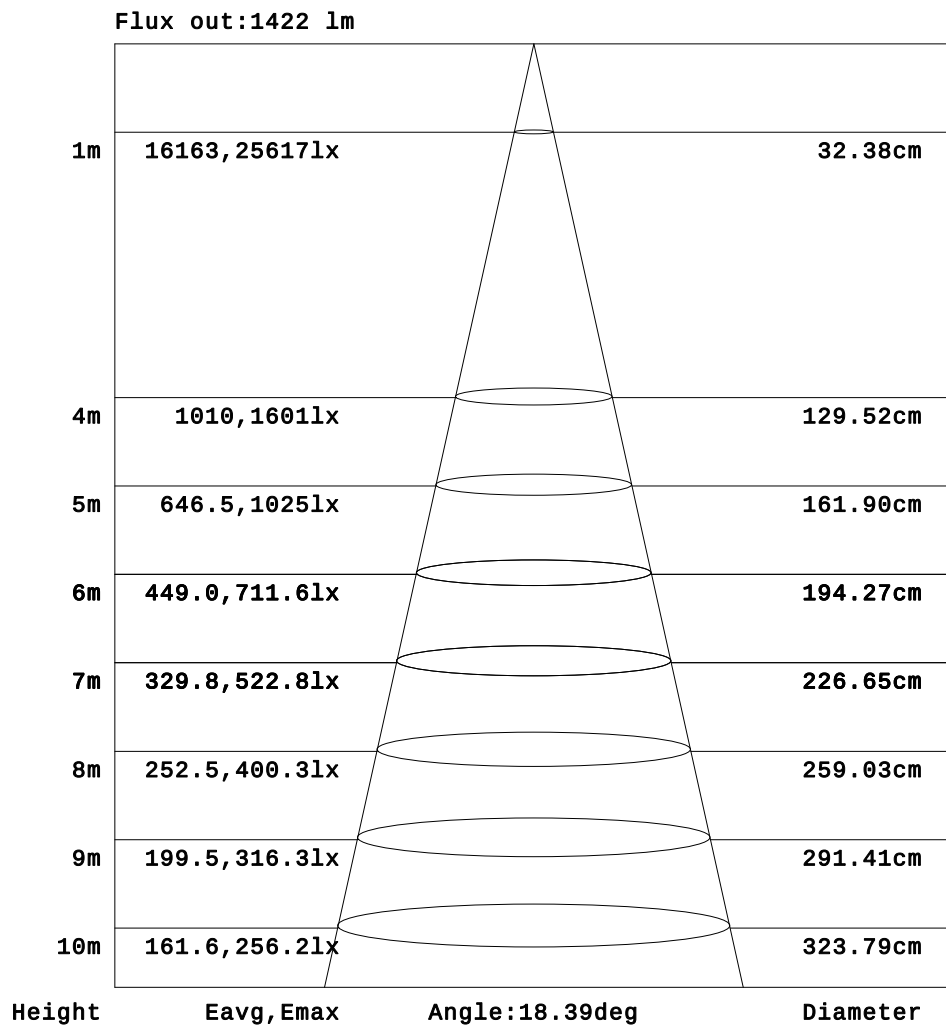

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-21

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.3V I:0.3429A P:73.11W PF:1.000 Freq:60.00Hz Lamp Flux:5227.27x1 lm		
NAME: 8.03.004.0205 15° SP-F310A-36P-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411059
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: ×10cd			
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.13	0.41	0.68	0.92	1.18	1.50	2.03	1.81	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.59	1.15	1.65	2.14	2.71	3.68	3.84	3.62	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.31	0.73	1.30	2.00	2.73	3.53	4.41	5.30	6.12	6.99	6.98	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.27	1.11	2.09	3.35	4.26	5.27	6.44	7.78	8.88	9.68	10.2	10.5	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.13	0.72	1.66	2.88	4.39	5.94	7.49	9.31	11.3	13.1	14.6	15.6	16.4	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.95	2.17	3.61	5.43	7.34	9.43	11.8	14.6	17.1	19.2	20.8	22.1	22.8	
-45	0.00	0.00	0.00	0.00	0.00	0.13	1.03	2.57	4.29	6.44	8.94	11.8	15.2	19.1	23.3	27.5	31.2	34.3	36.6	
-40	0.00	0.00	0.00	0.00	0.00	1.15	2.87	4.95	7.44	10.4	13.9	18.1	23.2	28.6	34.7	40.3	45.4	49.6	51.8	
-35	0.00	0.00	0.00	0.00	0.00	0.75	2.51	4.76	7.62	11.1	15.3	20.4	27.2	36.0	46.6	58.9	71.6	83.9	93.0	
-30	0.00	0.00	0.00	0.00	0.53	2.39	4.66	7.85	11.8	16.6	22.5	30.3	41.5	55.7	73.2	92.8	113	130	140	
-25	0.00	0.00	0.00	0.00	0.08	1.65	3.83	6.89	11.0	15.9	22.1	30.9	44.4	63.6	90.0	125	168	216	257	
-20	0.00	0.00	0.00	0.00	1.22	3.42	6.35	10.7	15.8	22.3	31.4	46.2	68.8	101	146	207	280	355	401	
-15	0.00	0.00	0.00	0.00	0.29	2.30	4.83	8.58	13.7	19.9	28.1	41.4	64.0	98.1	151	233	372	594	838	
-10	0.00	0.00	0.00	0.00	1.60	4.02	7.44	12.4	18.6	26.6	39.1	61.2	96.6	153	245	408	712	1141	1435	
-5	0.00	0.00	0.00	0.00	0.48	2.64	5.41	9.59	15.2	22.1	32.0	48.7	77.8	124	201	339	616	1136	1786	
0	0.00	0.00	0.00	0.03	1.81	4.34	8.02	13.3	19.6	28.3	42.7	68.0	109	177	299	554	1074	1942	2551	
5	0.00	0.00	0.00	0.00	0.48	2.66	5.45	9.69	15.2	22.1	31.8	48.1	76.3	121	195	326	575	1027	1583	
10	0.00	0.00	0.00	0.00	1.59	4.06	7.60	12.5	18.6	26.3	38.4	59.1	91.8	143	228	358	560	809	960	
15	0.00	0.00	0.00	0.00	0.29	2.31	4.98	8.85	13.8	19.7	27.6	40.1	60.5	91.2	139	209	312	452	585	
20	0.00	0.00	0.00	0.00	1.19	3.55	6.77	10.8	15.8	21.9	30.2	43.5	63.0	90.4	128	175	225	267	283	
25	0.00	0.00	0.00	0.00	0.08	1.64	4.23	7.20	11.0	15.7	21.5	29.5	41.2	57.3	78.9	107	138	169	189	
30	0.00	0.00	0.00	0.00	0.50	2.59	5.39	7.83	11.6	16.1	21.6	28.5	37.6	48.8	61.8	76.0	89.4	99.2	103	
35	0.00	0.00	0.00	0.00	0.00	0.72	2.84	4.84	7.48	10.8	14.8	19.5	25.4	32.5	40.6	49.4	58.3	65.8	70.5	
40	0.00	0.00	0.00	0.00	0.00	1.12	2.94	4.77	7.28	10.1	13.3	17.2	21.5	25.8	29.7	33.7	36.8	39.0	39.8	
45	0.00	0.00	0.00	0.00	0.00	0.13	1.04	2.45	4.16	6.34	8.76	11.4	14.4	17.8	20.9	23.8	26.4	28.2	29.3	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.85	2.10	3.60	5.47	7.27	9.18	11.3	13.6	15.6	17.1	18.3	19.0	19.3	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.67	1.55	2.85	4.46	5.71	7.16	8.78	10.4	11.8	12.8	13.5	13.9	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.13	0.97	2.24	3.14	3.94	4.90	5.91	6.92	7.70	8.19	8.44	8.54	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.23	0.69	1.37	1.70	2.35	3.07	3.81	4.47	5.06	5.37	5.38	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.19	0.67	1.12	1.52	1.94	2.48	2.27	2.31	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.19	0.43	0.64	0.84	1.09	1.21	1.13	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-21

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.3V I:0.3429A P:73.11W PF:1.000 Freq:60.00Hz Lamp Flux:5227.27x1 lm		
NAME: 8.03.004.0205 15° SP-F310A-36P-RDM	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:202411059
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: ×10cd		
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	1.86	2.23	2.06	1.71	1.49	1.29	1.06	0.80	0.57	0.27	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	4.08	4.51	3.63	3.14	2.74	2.31	1.81	1.34	0.78	0.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	7.16	7.55	7.28	6.66	5.98	5.18	4.44	3.76	3.09	1.94	1.05	0.56	0.12	0.00	0.00	0.00	0.00	0.00	
-60	10.6	10.6	10.2	9.39	8.24	7.14	6.22	5.46	4.03	2.52	1.50	0.55	0.00	0.00	0.00	0.00	0.00	0.00	
-55	16.8	16.7	16.3	15.4	14.0	12.1	10.3	8.59	7.01	5.08	3.46	2.15	1.06	0.27	0.00	0.00	0.00	0.00	
-50	23.0	22.5	21.4	19.8	17.5	14.8	12.2	9.89	7.67	5.59	3.81	2.38	1.03	0.01	0.00	0.00	0.00	0.00	
-45	37.5	37.0	35.0	32.1	28.3	24.0	19.6	15.7	12.3	9.30	6.68	4.49	2.99	1.12	0.08	0.00	0.00	0.00	
-40	51.8	49.4	45.4	40.0	33.9	27.9	22.2	17.4	13.2	9.79	6.80	4.69	2.62	0.68	0.00	0.00	0.00	0.00	
-35	96.5	93.1	83.9	71.5	58.2	45.7	34.9	26.0	19.5	14.6	10.6	7.14	4.75	2.24	0.46	0.00	0.00	0.00	
-30	139	127	108	86.9	67.1	50.1	36.4	26.5	19.7	14.5	10.0	6.57	3.74	1.48	0.02	0.00	0.00	0.00	
-25	272	250	207	158	115	81.5	57.0	39.0	27.5	20.0	14.3	9.55	5.90	3.13	0.96	0.00	0.00	0.00	
-20	387	324	248	176	120	81.6	54.4	36.5	25.7	18.4	12.6	7.95	4.49	2.03	0.15	0.00	0.00	0.00	
-15	916	744	498	314	198	128	82.8	52.8	35.0	24.2	17.0	11.3	6.82	3.72	1.32	0.00	0.00	0.00	
-10	1282	861	509	299	184	115	72.1	45.7	30.0	21.0	14.4	9.00	5.11	2.43	0.37	0.00	0.00	0.00	
-5	1972	1452	834	453	260	159	98.6	60.8	39.0	26.3	18.4	12.2	7.28	3.97	1.49	0.00	0.00	0.00	
0	2144	1249	645	343	202	123	75.6	47.0	31.0	21.6	14.7	9.10	5.14	2.44	0.37	0.00	0.00	0.00	
5	1734	1277	740	406	239	149	93.3	58.0	37.5	25.6	18.1	11.9	7.09	3.86	1.42	0.00	0.00	0.00	
10	865	615	387	243	157	102	64.7	41.7	28.1	20.0	13.8	8.52	4.84	2.26	0.29	0.00	0.00	0.00	
15	616	512	361	238	160	107	71.2	46.5	31.7	22.5	16.0	10.5	6.28	3.40	1.15	0.00	0.00	0.00	
20	266	225	177	132	94.3	66.3	45.4	31.7	23.2	16.9	11.4	7.07	4.02	1.73	0.07	0.00	0.00	0.00	
25	191	174	146	115	87.5	64.3	46.2	32.8	24.1	18.0	12.8	8.42	5.04	2.64	0.71	0.00	0.00	0.00	
30	99.8	90.8	78.2	64.5	51.1	39.3	29.4	22.6	17.3	12.7	8.65	5.43	3.02	1.10	0.00	0.00	0.00	0.00	
35	71.1	67.6	61.0	52.6	43.9	35.3	27.7	21.3	16.5	12.5	8.92	6.01	3.56	1.65	0.24	0.00	0.00	0.00	
40	39.0	37.0	34.0	30.3	26.2	22.0	17.9	14.1	10.9	7.91	5.51	3.55	1.69	0.31	0.00	0.00	0.00	0.00	
45	29.5	28.6	26.9	24.6	21.8	18.7	15.5	12.5	9.84	7.39	5.17	3.46	1.89	0.58	0.00	0.00	0.00	0.00	
50	19.1	18.4	17.3	15.7	13.7	11.6	9.57	7.66	5.81	4.07	2.69	1.49	0.42	0.00	0.00	0.00	0.00	0.00	
55	13.9	13.6	13.0	12.0	10.7	9.21	7.75	6.35	4.91	3.48	2.27	1.27	0.51	0.04	0.00	0.00	0.00	0.00	
60	8.48	8.21	7.66	6.80	5.91	5.08	4.24	3.34	2.24	1.38	0.62	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
65	5.48	5.62	5.11	4.59	4.01	3.43	2.81	2.18	1.48	0.94	0.54	0.17	0.00	0.00	0.00	0.00	0.00	0.00	
70	2.80	2.41	1.96	1.68	1.40	1.04	0.62	0.23	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	1.21	1.42	1.09	0.92	0.79	0.63	0.43	0.23	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-11-21

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: