

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	2446.2 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	59.4V x 58.4H
	At 50% of Imax	35.6V x 36.0H
	At 90% of Imax	14.4V x 15.3H

Beam Flux	Total	998.9 lumens per klm.
	To 10% of Imax	865.3 lumens per klm.
	To 50% of Imax	547.2 lumens per klm.
	To 90% of Imax	99.0 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-02-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.3V I:0.6840A P:145.5W PF:1.000 Freq:50.00Hz Lamp Flux:11222.1x1 lm		
NAME: 8.03.004.0208 40° SP-F310A-72P-RDM-TPR	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025020015
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

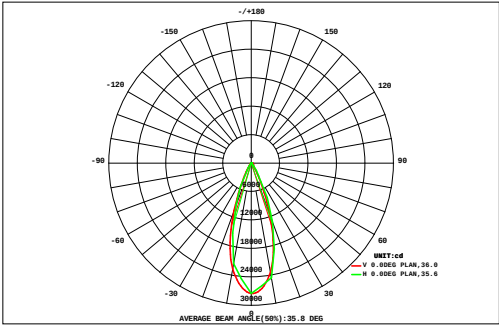

DATA OF LAMP		Eff:77.14lm/W	
MODE:SP-F310A-72P-RDM-TPR		Imax(cd)	27452
NOMINAL POWER(W)	145	AVAILABILITY(%)	87.3
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	9797
NOMINAL FLUX(lm)	11222.1	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	11222
TEST VOLTAGE(V)	220	θ @50%(H,V)	36,36DEG


		AREA FLUX DIAGRAM															UNIT:lm			Φ t	Φ a
		1.46	2.68	3.22	2.30	2.18	2.44	2.64	2.86	3.03	3.01	2.87	2.60	2.32	2.16	2.15	2.44	1.97	1.12	43.5	0.00
VERTICAL (DEG)	45	2.12	3.73	3.74	2.68	2.80	3.16	3.42	3.75	3.95	3.86	3.64	3.19	2.85	2.72	2.88	2.92	1.99	1.05	54.5	0.00
	40	1.45	2.28	3.22	3.73	4.50	5.49	7.21	9.24	10.8	11.0	9.61	7.66	5.92	4.84	3.76	2.94	2.12	1.33	97.1	0.00
	35	1.65	2.08	3.08	4.68	6.12	7.85	10.8	14.0	16.0	15.6	13.1	10.1	7.65	6.16	4.31	2.81	1.77	1.24	129	0.00
	30	1.83	2.58	3.92	6.49	11.3	19.1	31.1	44.5	54.1	55.8	49.5	36.5	22.5	12.7	7.29	4.18	2.50	1.59	368	298
	25	2.24	3.25	5.29	9.61	17.9	31.7	51.4	71.4	83.4	82.6	70.5	48.9	28.2	14.8	7.81	4.17	2.38	1.55	537	476
	20	2.27	3.54	6.42	13.4	28.4	55.0	90.5	119	135	140	129	104	69.6	36.0	15.8	7.25	3.62	2.06	961	912
	15	2.82	4.80	9.79	22.0	47.1	90.0	138	169	184	184	165	131	83.1	39.7	16.2	7.21	3.53	1.98	1300	1255
	10	2.61	4.42	8.93	20.4	45.1	86.4	135	172	192	196	181	152	108	59.6	25.9	10.9	4.95	2.49	1409	1366
	5	3.22	6.07	13.4	31.5	67.8	121	170	203	219	215	192	155	104	53.8	22.9	9.67	4.39	2.19	1594	1554
	0	2.53	4.10	8.01	17.8	39.8	79.7	129	166	187	192	178	151	105	57.3	25.9	11.1	5.04	2.54	1362	1317
-15	2.85	4.85	9.86	21.8	47.3	89.0	136	165	179	178	160	128	78.3	37.6	16.6	7.54	3.66	2.02	1268	1222	
	2.14	3.23	5.27	9.80	20.1	40.9	71.1	98.9	116	121	110	89.2	61.8	34.1	16.4	7.52	3.81	2.14	814	763	
	2.21	3.30	5.02	8.23	15.0	28.7	46.9	64.5	76.3	75.7	60.8	40.7	24.2	13.4	6.88	3.83	2.37	1.57	480	416	
	1.70	2.42	3.50	5.19	8.15	13.3	22.2	32.2	40.2	43.4	40.2	31.5	21.9	13.6	8.00	4.39	2.62	1.67	296	218	
	1.66	2.31	3.15	4.08	4.67	4.19	4.85	6.50	7.67	7.67	6.73	5.12	3.60	3.60	3.37	2.48	1.79	1.26	74.7	0.00	
-35	1.45	2.26	3.04	3.44	3.93	4.73	6.03	7.91	9.68	10.5	9.90	8.29	6.25	4.63	3.60	2.68	1.99	1.31	91.6	0.00	
	1.60	2.56	3.09	2.81	2.45	2.37	2.12	1.90	1.85	1.79	1.64	1.53	1.62	1.72	1.76	1.86	1.54	0.97	35.2	0.00	
-45	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL(DEG)					10	15	20	25	30	35	40	45
Φ t	37.8	60.5	102	190	374	685	1058	1351	1520	1538	1385	1107	737	399	192	95.9	52.0	30.1	10913	---	
Φ a	0.00	0.00	2.30	88.3	297	632	1014	1302	1467	1484	1337	1068	690	323	91.8	0.00	0.00	0.00	---	9797	

one-half-peak spread: U:19.5,D:16.3 , L:18.4,R:17.8 NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2025-02-14
 V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.3V I:0.6840A P:145.5W PF:1.000 Freq:50.00Hz Lamp Flux:11222.1x1 lm		
NAME: 8.03.004.0208 40° SP-F310A-72P-RDM-TPR	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025020015
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

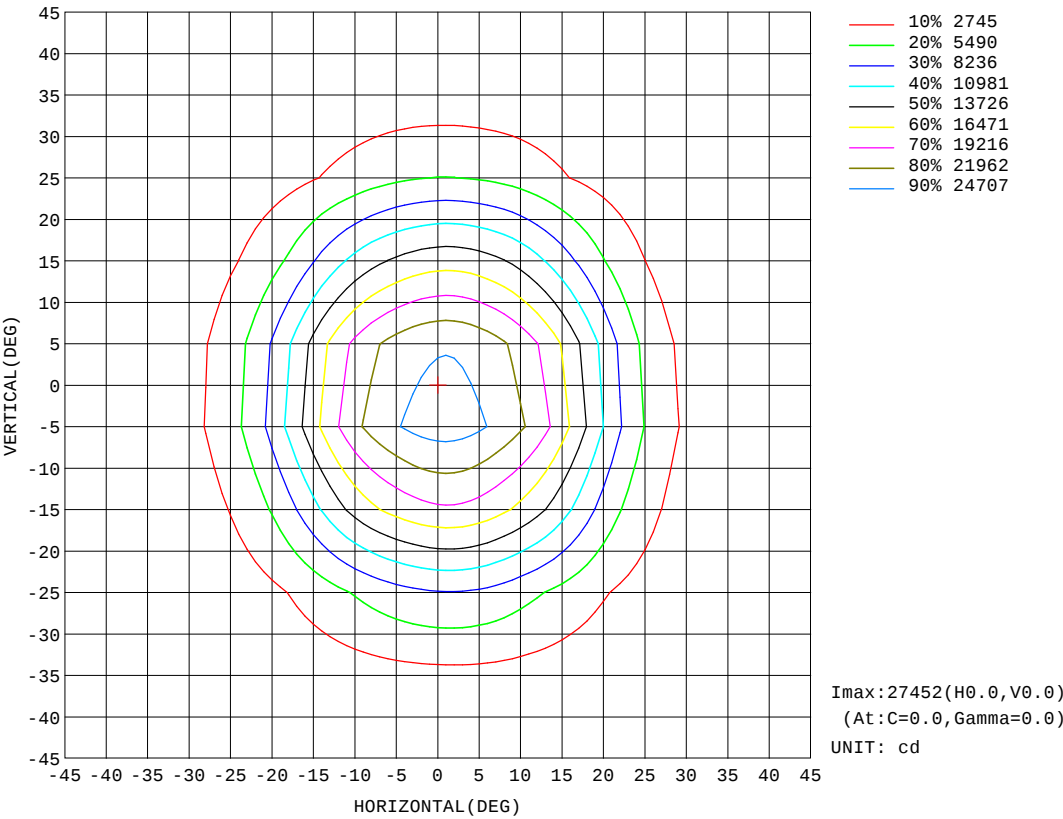


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-02-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:220.3V I:0.6840A P:145.5W PF:1.000 Freq:50.00Hz Lamp Flux:11222.1x1 lm		
NAME: 8.03.004.0208 40° SP-F310A-72P-RDM-TPR	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025020015
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

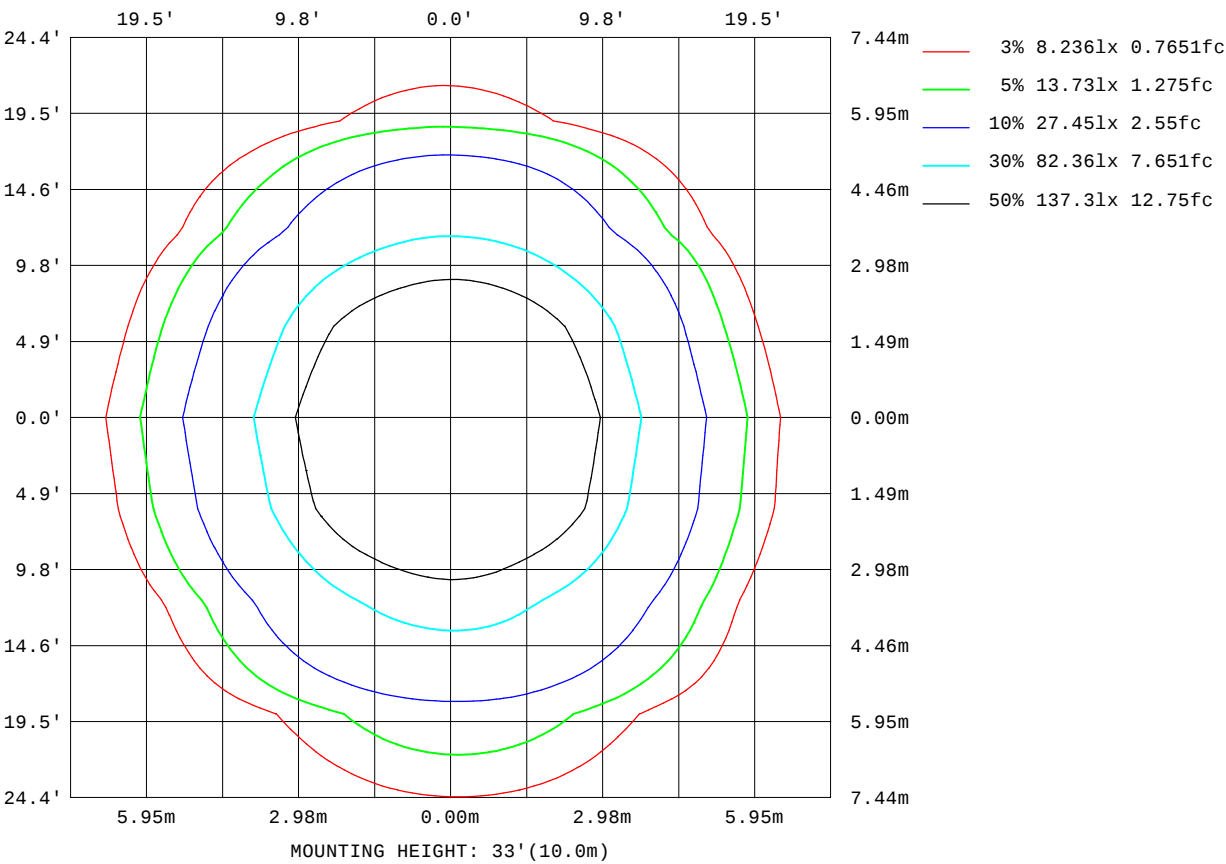

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-02-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

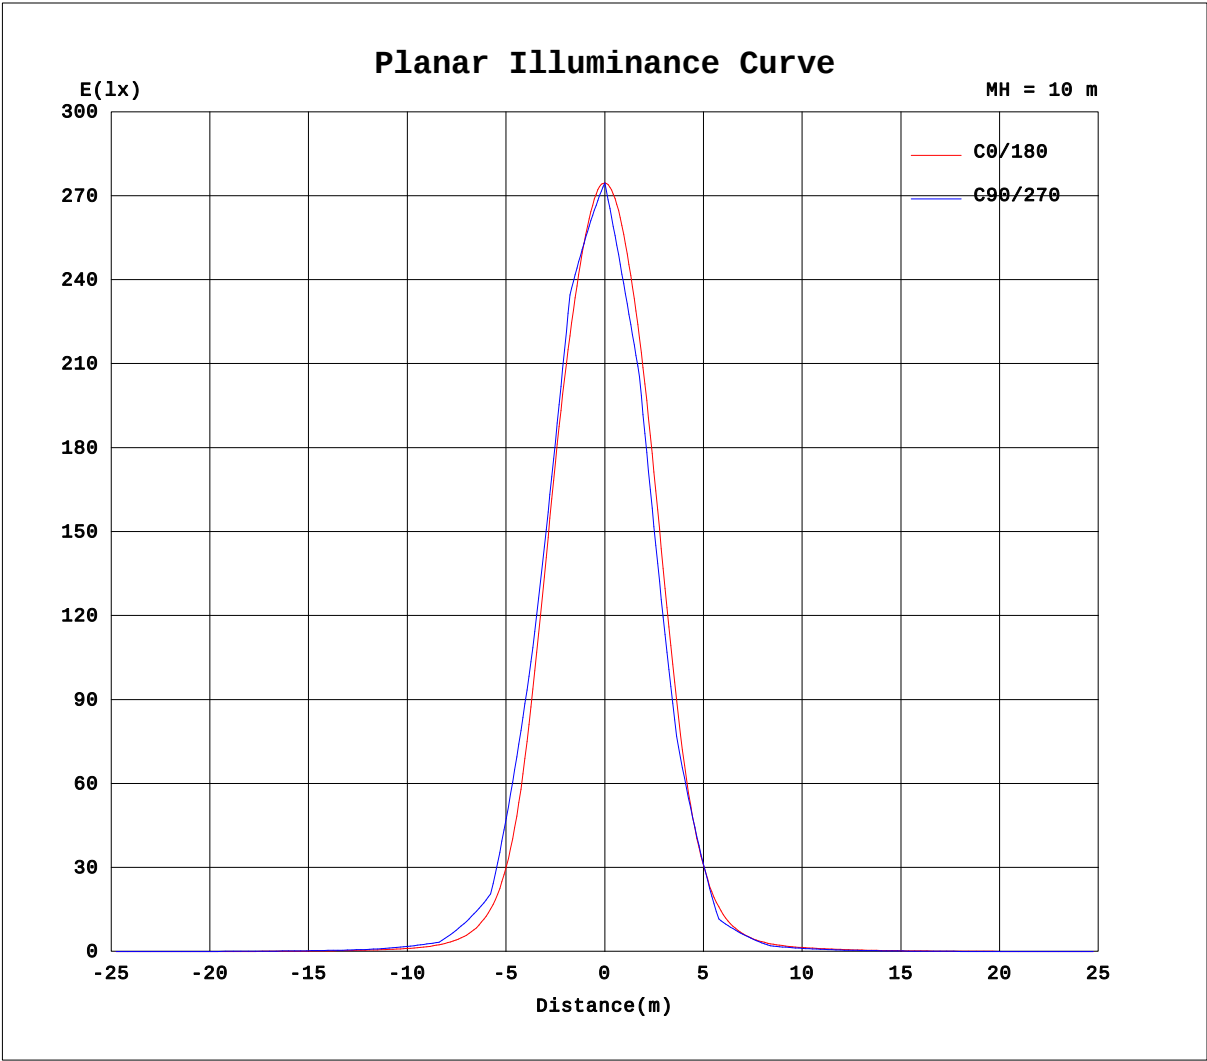


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-02-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.3V I:0.6840A P:145.5W PF:1.000 Freq:50.00Hz Lamp Flux:11222.1x1 lm		
NAME: 8.03.004.0208 40° SP-F310A-72P-RDM-TPR	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025020015
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

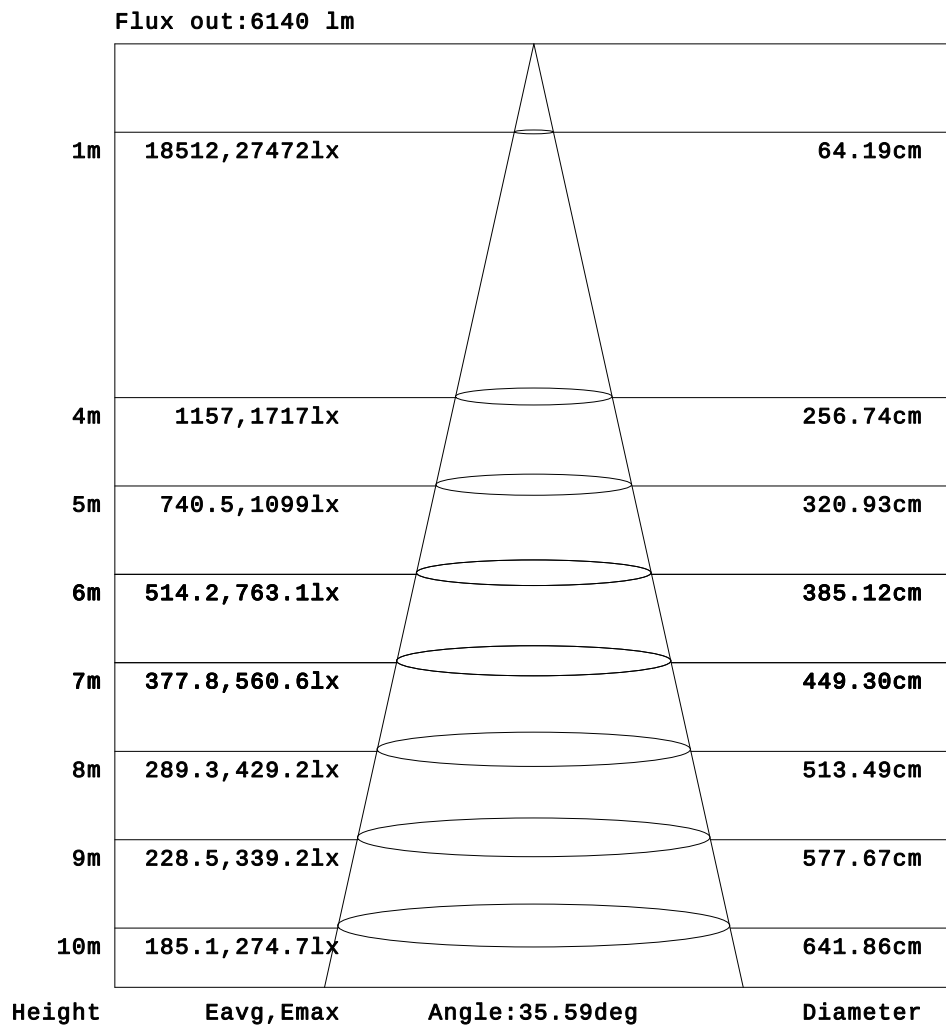

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-02-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.3V I:0.6840A P:145.5W PF:1.000 Freq:50.00Hz Lamp Flux:11222.1x1 lm		
NAME: 8.03.004.0208 40° SP-F310A-72P-RDM-TPR	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025020015
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																		UNIT: ×10cd	
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.28	1.10	1.67	2.45	2.04	1.50	1.61	1.75	1.94	2.20	2.41
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.94	2.38	3.65	5.04	3.74	2.97	3.30	3.56	3.97	4.50	4.85
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.53	1.37	3.25	7.08	9.51	12.1	10.7	7.82	7.54	8.17	8.65	9.15	9.43
-60	0.00	0.00	0.00	0.00	0.00	0.12	1.31	3.22	6.90	13.1	16.5	19.5	16.4	12.0	12.0	13.0	13.5	14.0	14.0
-55	0.00	0.00	0.00	0.00	0.01	0.79	2.60	4.56	7.80	14.7	22.8	27.7	26.9	21.6	18.6	19.8	21.0	22.1	22.6
-50	0.00	0.00	0.00	0.00	0.20	2.01	4.62	6.92	10.7	19.7	31.6	36.5	35.6	29.1	25.6	27.2	29.0	30.5	31.2
-45	0.00	0.00	0.00	0.00	0.61	2.73	5.61	8.47	11.9	18.7	30.9	40.2	43.0	38.4	36.6	39.9	44.9	50.0	53.6
-40	0.00	0.00	0.00	0.00	1.68	4.49	7.77	11.3	15.0	22.0	34.7	46.0	49.4	45.8	48.7	54.3	63.0	71.3	76.4
-35	0.00	0.00	0.00	0.03	1.93	5.00	8.46	12.5	17.1	22.9	32.6	44.4	54.2	63.8	78.5	101	138	175	196
-30	0.00	0.00	0.00	0.40	3.34	6.85	10.7	15.7	20.9	27.1	35.0	47.5	62.3	87.1	115	161	228	290	319
-25	0.00	0.00	0.00	0.35	3.41	7.17	11.3	16.2	22.4	29.2	38.7	53.8	79.6	129	222	382	571	728	810
-20	0.00	0.00	0.00	1.30	4.92	9.04	13.7	19.1	26.4	34.6	47.6	68.3	111	200	384	679	982	1212	1311
-15	0.00	0.00	0.00	0.86	4.61	8.92	13.6	19.1	26.6	35.7	50.0	77.7	143	286	571	1016	1462	1736	1877
-10	0.00	0.00	0.00	1.79	5.89	10.5	15.3	21.9	30.1	41.3	60.5	105	214	461	917	1544	2079	2338	2457
-5	0.00	0.00	0.00	1.16	5.22	9.80	14.6	20.8	29.0	39.9	58.3	101	207	451	914	1552	2124	2448	2598
0	0.00	0.00	0.00	1.98	6.30	10.9	15.8	22.8	31.7	44.0	67.1	126	269	588	1151	1814	2336	2647	2745
5	0.00	0.00	0.00	1.12	5.09	9.57	14.2	20.6	28.7	39.1	56.2	96.2	195	423	847	1446	1981	2297	2444
10	0.00	0.00	0.00	1.65	5.62	10.00	14.8	21.5	29.4	39.2	56.0	94.0	187	391	764	1321	1787	2035	2154
15	0.00	0.00	0.00	0.78	4.29	8.44	12.8	18.7	26.0	33.9	45.8	68.8	123	241	462	811	1173	1415	1535
20	0.00	0.00	0.00	1.11	4.53	8.51	12.8	18.7	25.4	32.5	42.2	58.9	93.4	161	276	458	680	862	927
25	0.00	0.00	0.00	0.30	3.06	6.73	10.6	16.1	21.6	27.6	35.5	47.5	68.7	106	164	259	384	498	553
30	0.00	0.00	0.00	0.31	2.97	6.42	10.2	15.9	19.8	25.7	32.7	42.7	55.1	70.4	82.2	107	139	169	180
35	0.00	0.00	0.00	0.02	1.66	4.62	8.12	12.5	16.2	22.1	35.7	49.2	50.4	50.7	57.9	70.1	87.2	105	113
40	0.00	0.00	0.00	0.00	1.42	4.15	7.55	10.8	14.2	22.7	45.0	58.2	43.5	34.3	37.1	39.9	42.3	45.3	45.9
45	0.00	0.00	0.00	0.00	0.51	2.42	5.25	8.07	11.1	17.9	32.0	44.4	35.7	26.5	28.1	30.1	31.5	33.4	34.1
50	0.00	0.00	0.00	0.00	0.17	1.75	3.96	6.48	9.72	17.6	25.0	31.8	21.2	19.0	20.0	20.8	21.5	22.0	22.1
55	0.00	0.00	0.00	0.00	0.00	0.65	1.95	3.94	6.59	11.5	16.5	20.3	15.7	13.6	14.5	15.1	15.7	16.2	16.4
60	0.00	0.00	0.00	0.00	0.00	0.00	0.58	2.32	4.88	7.59	9.58	9.24	8.00	8.55	9.48	9.70	10.2	10.5	10.5
65	0.00	0.00	0.00	0.00	0.00	0.00	0.19	0.96	2.16	3.91	5.25	5.50	4.66	4.94	5.71	6.27	6.73	7.12	6.90
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.83	1.31	1.28	1.31	1.55	2.37	3.07	3.45	3.80	3.08
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.35	0.62	0.66	0.64	0.74	1.10	1.48	1.67	1.89	1.62
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-02-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.3V I:0.6840A P:145.5W PF:1.000 Freq:50.00Hz Lamp Flux:11222.1x1 lm		
NAME: 8.03.004.0208 40° SP-F310A-72P-RDM-TPR	TYPE:	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025020015
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																		UNIT: ×10cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	2.37	2.12	1.86	1.72	1.57	1.41	1.23	0.99	0.52	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	4.66	4.11	3.63	3.46	3.06	2.73	2.40	1.84	0.82	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	9.26	8.68	8.10	8.25	7.13	6.41	6.09	5.34	3.87	2.27	1.11	0.31	0.00	0.00	0.00	0.00	0.00	0.00	
-60	13.7	13.0	12.5	12.6	10.9	9.89	9.61	8.35	6.22	3.91	1.81	0.34	0.00	0.00	0.00	0.00	0.00	0.00	
-55	22.2	21.2	19.9	19.0	16.8	15.7	16.3	14.0	9.68	6.29	3.76	1.70	0.44	0.00	0.00	0.00	0.00	0.00	
-50	30.5	29.0	26.8	24.5	22.0	21.7	22.7	17.9	11.6	7.55	4.80	2.32	0.55	0.00	0.00	0.00	0.00	0.00	
-45	52.7	48.2	42.2	36.5	31.9	28.9	27.9	22.4	15.0	10.0	6.65	3.88	1.56	0.21	0.00	0.00	0.00	0.00	
-40	73.5	65.2	55.1	46.5	40.2	35.7	32.0	23.6	15.9	11.0	7.33	4.43	1.80	0.12	0.00	0.00	0.00	0.00	
-35	193	166	127	91.6	71.1	51.6	38.5	28.2	19.9	14.0	9.54	5.93	3.00	0.89	0.00	0.00	0.00	0.00	
-30	304	252	183	126	94.0	61.1	41.1	29.1	21.2	14.9	10.3	6.17	3.22	1.00	0.00	0.00	0.00	0.00	
-25	784	646	473	297	174	94.7	55.7	36.1	25.3	17.9	12.3	7.69	4.36	1.75	0.07	0.00	0.00	0.00	
-20	1226	972	690	409	216	108	60.4	38.0	26.0	18.5	12.4	7.72	4.34	1.68	0.00	0.00	0.00	0.00	
-15	1818	1579	1205	727	370	172	86.6	48.0	30.5	21.0	14.4	9.12	5.38	2.44	0.30	0.00	0.00	0.00	
-10	2336	2063	1532	871	423	189	92.1	49.1	30.0	20.7	14.1	8.83	5.15	2.22	0.13	0.00	0.00	0.00	
-5	2511	2237	1758	1097	540	238	111	56.9	33.4	22.6	15.5	9.94	5.90	2.83	0.50	0.00	0.00	0.00	
0	2598	2262	1731	1065	500	218	101	52.0	31.2	21.4	14.6	9.17	5.33	2.39	0.16	0.00	0.00	0.00	
5	2365	2091	1628	1021	491	215	101	53.2	31.9	22.0	15.4	9.90	5.82	2.79	0.48	0.00	0.00	0.00	
10	2049	1767	1293	736	331	149	75.3	43.2	27.7	19.8	13.9	8.74	4.99	2.15	0.12	0.00	0.00	0.00	
15	1486	1284	944	563	276	132	69.6	40.9	27.3	19.9	14.1	8.95	5.12	2.29	0.27	0.00	0.00	0.00	
20	863	683	441	250	141	80.7	48.0	32.0	23.3	17.7	12.0	7.39	3.99	1.52	0.00	0.00	0.00	0.00	
25	526	434	298	184	116	71.8	46.7	30.8	22.4	16.8	11.9	7.31	3.96	1.56	0.05	0.00	0.00	0.00	
30	163	134	103	83.6	69.2	50.6	37.4	25.5	19.1	13.9	9.85	5.70	2.84	0.84	0.00	0.00	0.00	0.00	
35	106	90.9	72.9	60.7	54.0	47.1	40.2	27.2	17.9	12.8	8.86	5.34	2.58	0.70	0.00	0.00	0.00	0.00	
40	44.1	40.8	36.9	34.6	35.0	42.0	38.4	24.1	14.3	9.92	6.47	3.69	1.47	0.04	0.00	0.00	0.00	0.00	
45	33.1	31.6	28.9	27.0	26.7	31.7	34.2	22.9	13.7	8.80	5.67	3.18	1.20	0.11	0.00	0.00	0.00	0.00	
50	21.6	21.1	20.0	19.0	18.9	24.7	26.5	17.3	10.2	6.30	3.75	1.71	0.29	0.00	0.00	0.00	0.00	0.00	
55	16.0	15.6	15.1	14.2	13.5	15.6	18.3	12.9	8.48	4.95	2.72	1.07	0.28	0.00	0.00	0.00	0.00	0.00	
60	10.2	9.82	10.2	9.09	8.28	8.30	8.37	6.84	4.84	2.63	0.92	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	6.49	6.12	5.99	5.64	5.03	4.84	5.02	4.03	2.69	1.51	0.59	0.03	0.00	0.00	0.00	0.00	0.00	0.00	
70	2.66	2.26	2.00	1.95	1.61	1.49	1.39	0.68	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	1.37	1.17	1.02	1.01	0.83	0.75	0.72	0.43	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-02-14

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: