

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	2257.3 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	--

Beam Spread	At 10% of Imax	69.4V x 71.8H
	At 50% of Imax	30.8V x 29.5H
	At 90% of Imax	7.6V x 10.5H

Beam Flux	Total	1000.1 lumens per klm.
	To 10% of Imax	820.9 lumens per klm.
	To 50% of Imax	329.7 lumens per klm.
	To 90% of Imax	33.0 lumens per klm.

Upward LOR	0.0 %
Downward LOR	100.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.8V I:0.3494A P:75.28W PF:0.9758 Lamp Flux:5265.97x1 lm		
NAME: 8.03.005.0183 30° SP-F310B-26P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090039
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

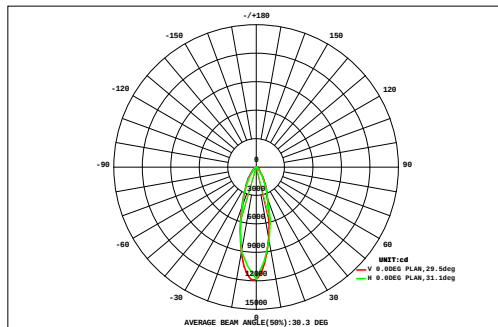

DATA OF LAMP		Eff:69.95lm/W	
MODEL	SP-F310B-26P-RDM	Imax(cd)	11887
NOMINAL POWER(W)	76	AVAILABILITY(%)	82.5
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	4342
NOMINAL FLUX(lm)	5265.97	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	5266
TEST VOLTAGE(V)	220.8	θ @50%(H,V)	30,31DEG

		AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
		0.00	0.00	0.01	0.04	0.14	0.28	0.45	0.58	0.64	0.63	0.55	0.37	0.22	0.08	0.02	0.01	0.00	0.00	4.01	0.00		
VERTICAL (DEG)	72	0.00	0.03	0.18	0.41	0.72	1.12	1.57	1.87	2.01	1.99	1.80	1.38	0.94	0.60	0.31	0.11	0.00	0.00	15.0	0.00		
	64	0.01	0.14	0.43	0.90	1.55	2.50	3.44	4.11	4.45	4.45	4.08	3.32	2.24	1.42	0.81	0.38	0.11	0.00	34.3	0.00		
	56	0.04	0.29	0.79	1.61	2.86	4.77	6.57	7.98	8.78	8.82	8.05	6.57	4.52	2.69	1.53	0.74	0.27	0.03	66.9	0.00		
	48	0.12	0.53	1.37	2.78	5.28	8.87	12.3	15.3	17.1	17.1	15.3	12.0	8.02	4.50	2.41	1.14	0.41	0.07	125	9.39		
	40	0.21	0.79	2.06	4.39	8.98	15.4	22.5	29.2	33.5	33.3	28.7	21.5	13.8	7.24	3.68	1.69	0.62	0.13	228	148		
	32	0.26	1.00	2.65	6.03	13.2	24.1	38.6	55.0	66.7	65.9	53.0	36.4	22.1	11.1	5.25	2.36	0.86	0.21	405	352		
	24	0.28	1.10	3.00	7.01	16.1	31.4	55.5	92.1	127	127	92.4	55.5	31.3	15.4	6.83	2.98	1.09	0.28	667	622		
	-24	0.31	1.21	3.33	7.91	18.6	37.0	68.9	125	187	189	128	70.0	37.3	18.0	7.69	3.28	1.18	0.30	904	863		
		0.37	1.38	3.72	8.95	21.0	41.3	79.6	149	218	205	129	68.3	36.0	16.9	7.20	3.04	1.06	0.25	991	950		
		0.33	1.25	3.38	7.92	18.5	36.3	65.3	111	154	150	104	60.1	32.9	15.8	6.87	2.91	1.03	0.25	773	730		
		0.26	0.99	2.67	6.04	13.6	25.8	42.2	62.1	79.8	82.6	67.0	45.1	26.5	13.4	6.03	2.65	0.96	0.24	478	429		
		0.18	0.75	2.03	4.43	9.35	17.4	26.9	36.5	42.8	43.1	37.6	28.3	18.3	9.72	4.63	2.12	0.78	0.19	285	220		
0.12		0.56	1.49	3.11	6.04	10.7	15.3	18.9	20.4	20.2	18.3	14.8	10.3	5.72	2.97	1.40	0.52	0.11	151	17.6			
-32	0.08	0.39	0.99	1.93	3.43	5.75	7.75	9.12	9.77	9.52	8.51	6.93	4.83	2.75	1.57	0.73	0.25	0.03	74.3	0.00			
-40	0.01	0.16	0.47	0.98	1.62	2.71	3.85	4.63	5.04	5.01	4.58	3.79	2.62	1.61	0.92	0.43	0.13	0.01	38.6	0.00			
-48	0.00	0.03	0.18	0.42	0.75	1.16	1.77	2.20	2.41	2.42	2.24	1.85	1.28	0.80	0.44	0.19	0.05	0.01	18.2	0.00			
-56	0.00	0.00	0.03	0.09	0.21	0.36	0.57	0.76	0.84	0.84	0.77	0.60	0.37	0.22	0.10	0.04	0.01	0.00	5.82	0.00			
-64	0.00	0.00	0.03	0.09	0.21	0.36	0.57	0.76	0.84	0.84	0.77	0.60	0.37	0.22	0.10	0.04	0.01	0.00	5.82	0.00			
-72	0.00	0.00	0.03	0.09	0.21	0.36	0.57	0.76	0.84	0.84	0.77	0.60	0.37	0.22	0.10	0.04	0.01	0.00	5.82	0.00			
		-72	-64	-56	-48	-40	-32	-24	-16	HORIZONTAL (DEG)				16	24	32	40	48	56	64	72		
Φ t	2.57	10.6	28.8	64.9	142	267	453	726	982	968	704	437	254	128	59.3	26.2	9.33	2.10	5264	---			
Φ a	0.00	0.00	0.00	0.00	45.4	195	389	662	920	907	641	369	183	30.5	0.00	0.00	0.00	0.00	---	4342			


one-half-peak spread: U:16.4,D:14.6 , L:15.3, ~~NEVA~~ Beam Type: Type 5 x 4 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.8V I:0.3494A P:75.28W PF:0.9758 Lamp Flux:5265.97x1 lm		
NAME: 8.03.005.0183 30° SP-F310B-26P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090039
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

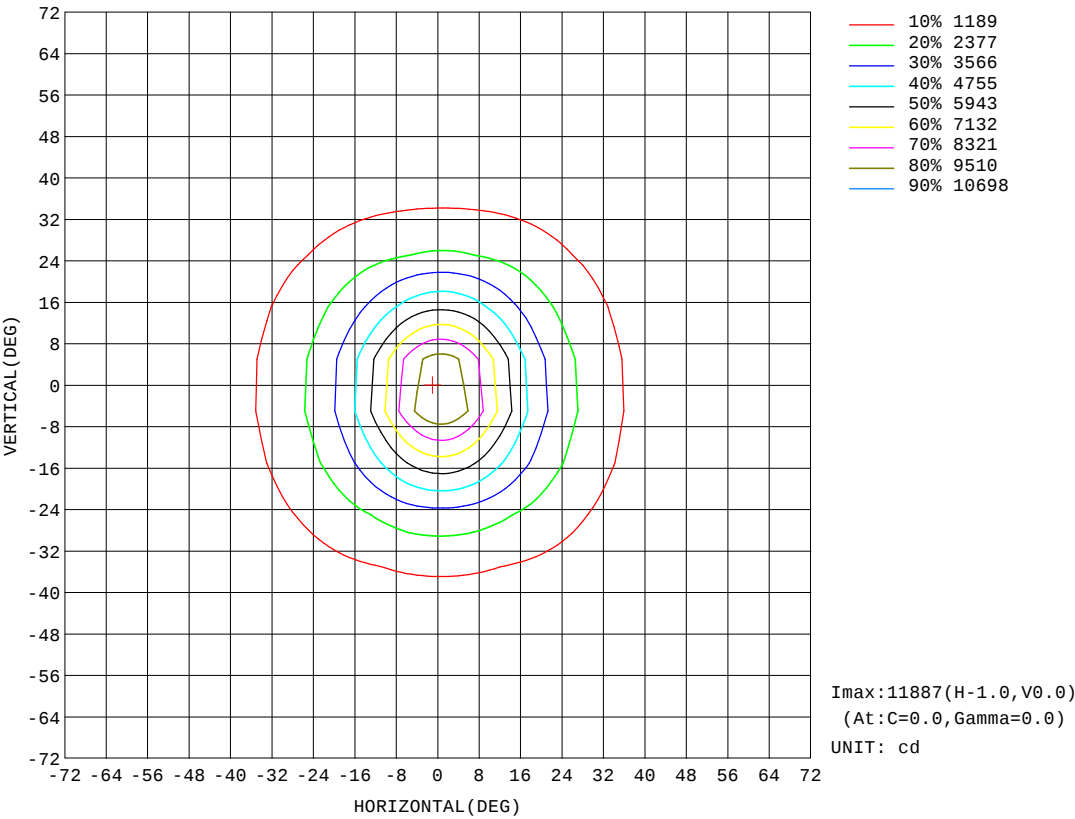


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.8V I:0.3494A P:75.28W PF:0.9758 Lamp Flux:5265.97x1 lm		
NAME: 8.03.005.0183 30° SP-F310B-26P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090039
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

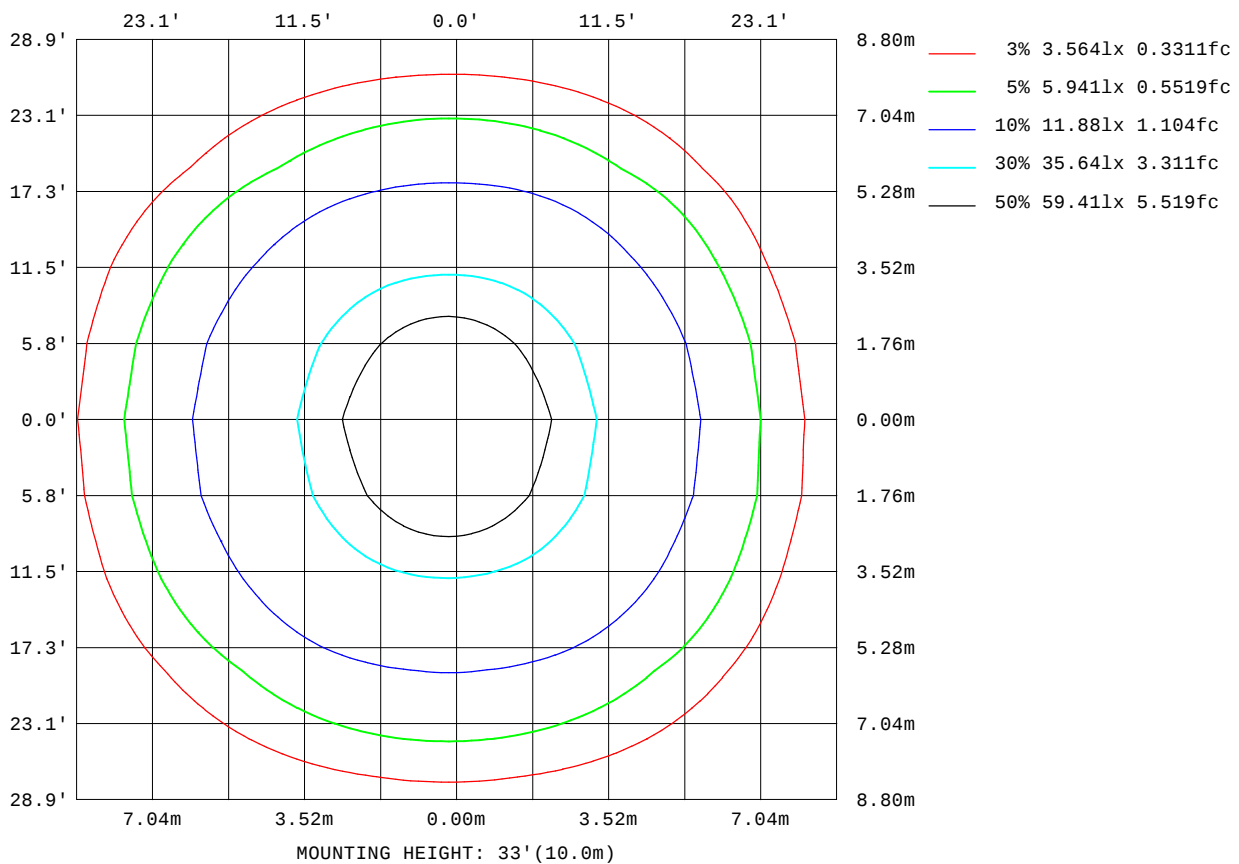


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.8V I:0.3494A P:75.28W PF:0.9758 Lamp Flux:5265.97x1 lm		
NAME: 8.03.005.0183 30° SP-F310B-26P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090039
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

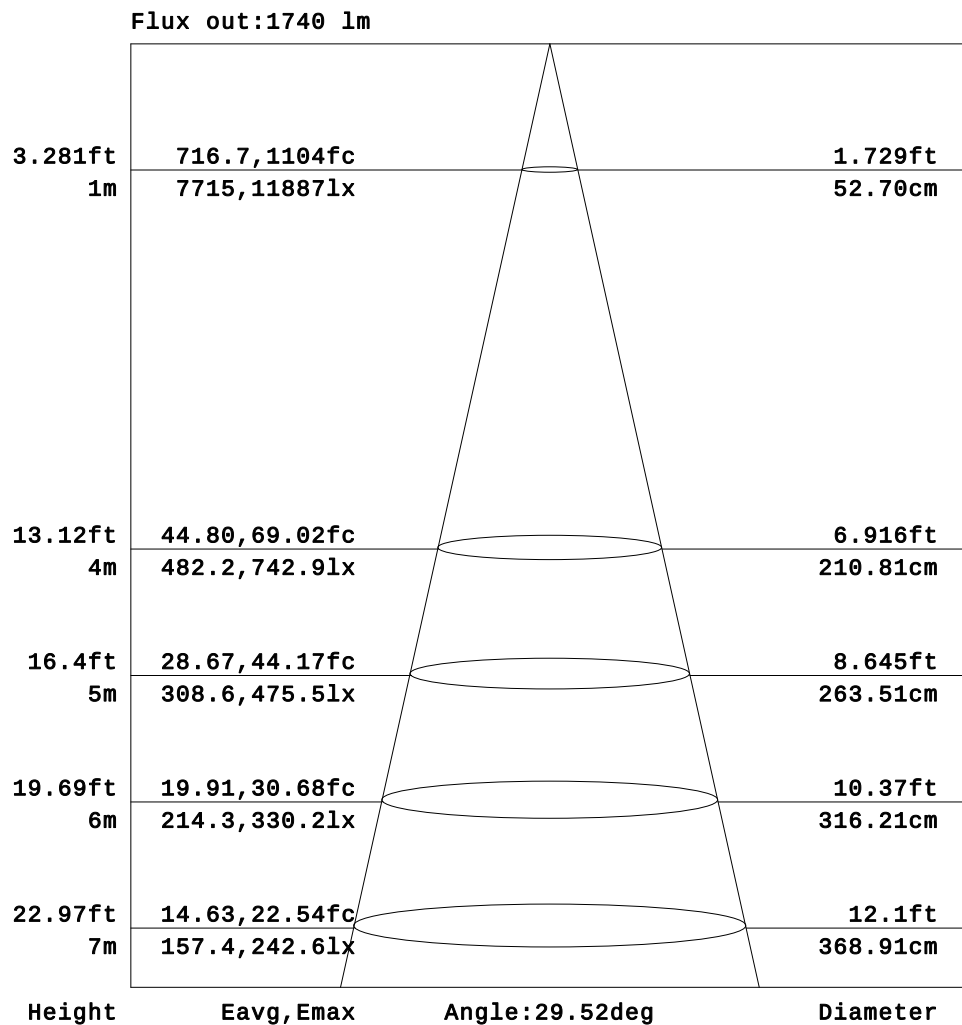


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

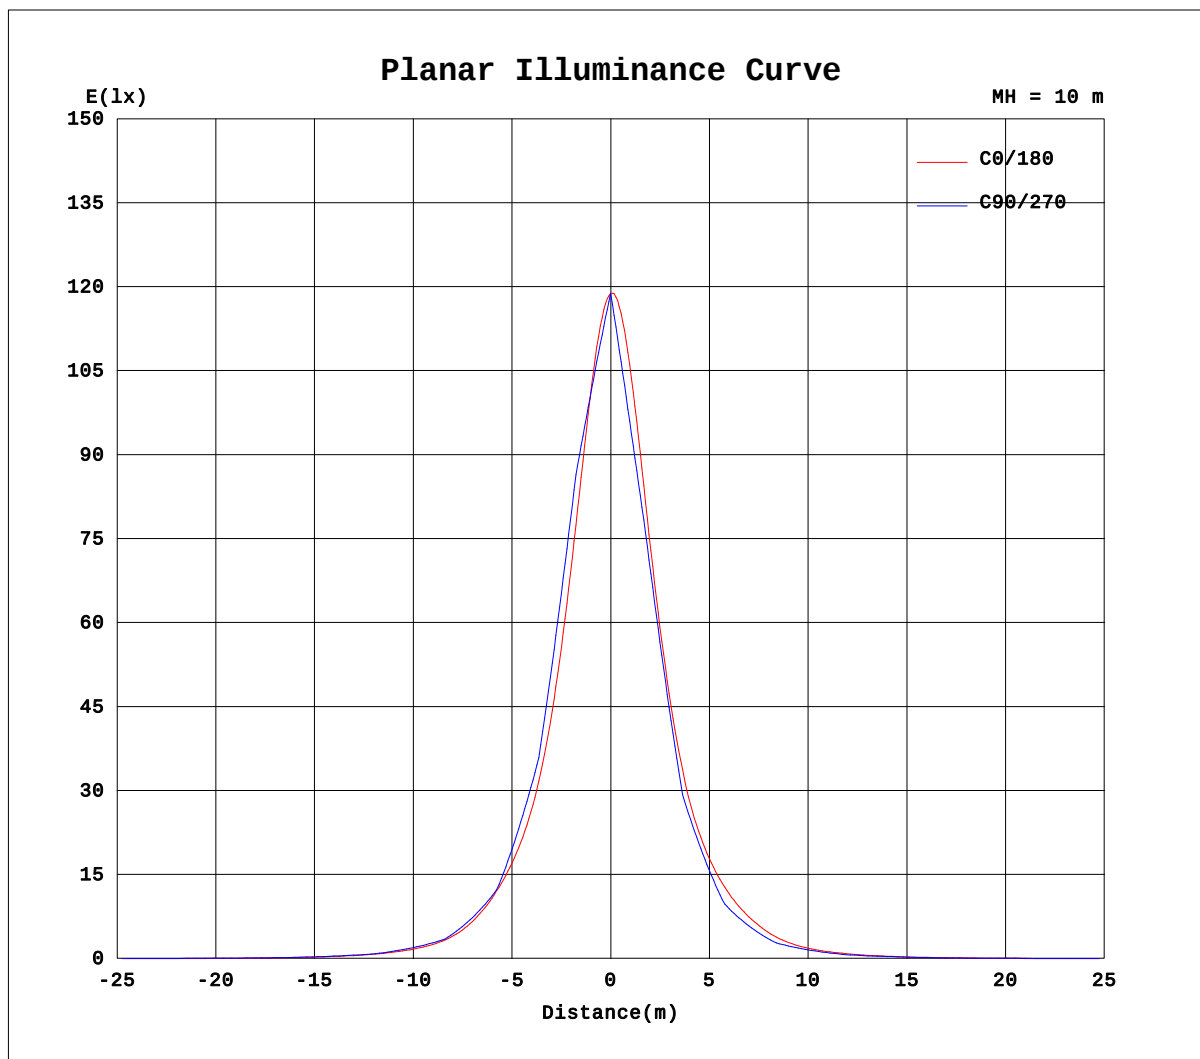

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 28.0DEG
Operators: QC1
Test Date: 2024-09-06

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 83%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.8V I:0.3494A P:75.28W PF:0.9758 Lamp Flux:5265.97x1 lm		
NAME: 8.03.005.0183 30° SP-F310B-26P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090039
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1																	UNIT: ×10cd		
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.19	0.39	0.60	0.81	1.02	1.28	1.48	1.56	1.57
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16	0.53	0.96	1.36	1.79	2.23	2.74	3.04	3.14	3.12
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.44	0.89	1.38	2.11	2.92	3.74	4.70	5.87	6.82	7.43	7.76	7.84
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.35	1.25	2.13	3.18	4.27	5.54	6.79	8.60	10.3	11.4	12.1	12.5	12.5
-55	0.00	0.00	0.00	0.00	0.00	0.13	0.85	2.06	3.41	5.04	6.85	8.87	11.4	14.8	17.8	20.0	21.6	22.7	23.0
-50	0.00	0.00	0.00	0.00	0.00	0.85	2.28	3.92	5.88	8.30	11.0	14.0	18.7	23.6	27.2	30.0	32.1	33.3	33.6
-45	0.00	0.00	0.00	0.00	0.00	1.07	2.87	5.01	7.75	11.1	14.9	20.0	27.6	35.4	42.0	47.5	52.0	54.9	56.1
-40	0.00	0.00	0.00	0.00	0.66	2.67	5.06	8.14	12.1	16.8	22.5	31.2	43.1	52.8	61.5	68.8	74.5	77.9	78.5
-35	0.00	0.00	0.00	0.00	0.40	2.59	5.30	9.01	14.1	20.4	28.4	41.0	58.5	75.3	92.0	108	121	130	134
-30	0.00	0.00	0.00	0.00	1.80	4.50	8.21	13.5	20.7	29.8	42.8	64.2	87.7	111	135	158	177	187	189
-25	0.00	0.00	0.00	0.00	1.27	4.03	7.80	13.4	21.1	31.4	46.4	71.3	103	137	176	220	262	298	311
-20	0.00	0.00	0.00	0.12	2.84	6.26	11.4	18.7	28.9	43.3	67.1	103	145	193	251	317	378	424	432
-15	0.00	0.00	0.00	0.00	1.96	5.13	9.80	17.0	26.9	41.1	63.5	101	149	205	280	380	499	612	668
-10	0.00	0.00	0.00	0.53	3.36	7.29	13.3	22.3	34.9	53.6	86.7	136	195	271	382	535	716	863	900
-5	0.00	0.00	0.00	0.00	2.30	5.71	10.9	18.9	30.2	46.7	74.5	120	177	248	353	514	722	934	1046
0	0.00	0.00	0.00	0.70	3.62	7.78	14.2	23.5	37.4	58.1	95.0	147	211	299	439	648	908	1130	1180
5	0.00	0.00	0.00	0.00	2.28	5.66	10.9	18.8	30.0	46.2	73.7	118	172	242	343	495	690	889	992
10	0.00	0.00	0.00	0.52	3.31	7.16	13.2	21.9	34.2	52.5	84.4	129	185	256	356	489	641	765	793
15	0.00	0.00	0.00	0.00	1.95	4.99	9.60	16.5	26.2	39.7	61.5	96.3	138	190	255	340	438	529	574
20	0.00	0.00	0.00	0.24	2.74	6.04	11.0	18.1	27.7	41.5	63.9	95.2	131	172	218	268	314	345	352
25	0.00	0.00	0.00	0.00	1.29	3.84	7.45	12.7	19.8	29.5	43.5	65.7	91.5	120	151	184	216	240	251
30	0.00	0.00	0.00	0.00	1.74	4.20	7.63	12.5	18.9	27.1	39.1	56.4	74.5	92.4	110	126	139	148	150
35	0.00	0.00	0.00	0.00	0.42	2.40	4.88	8.28	12.8	18.5	25.8	36.9	50.3	63.2	75.6	86.9	96.4	103	106
40	0.00	0.00	0.00	0.00	0.62	2.39	4.56	7.39	11.0	15.2	20.4	28.0	36.7	44.0	50.3	55.6	59.7	62.1	62.7
45	0.00	0.00	0.00	0.00	0.00	0.94	2.60	4.56	7.06	10.0	13.5	18.1	24.1	29.9	34.7	38.7	41.9	43.9	44.8
50	0.00	0.00	0.00	0.00	0.00	0.81	2.09	3.61	5.43	7.59	9.93	12.7	16.5	19.9	22.6	24.6	26.0	26.7	26.9
55	0.00	0.00	0.00	0.00	0.00	0.10	0.78	1.87	3.12	4.59	6.21	7.98	10.3	12.8	15.0	16.6	17.7	18.4	18.6
60	0.00	0.00	0.00	0.00	0.00	0.00	0.26	1.08	1.93	2.85	3.86	4.93	6.08	7.62	8.79	9.58	10.1	10.4	10.4
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.38	0.79	1.24	1.80	2.49	3.21	4.10	5.02	5.67	6.09	6.34	6.41
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.29	0.62	0.98	1.36	1.81	2.13	2.31	2.41	2.42
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.25	0.42	0.61	0.81	1.01	1.13	1.19	1.21
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-06

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.8V I:0.3494A P:75.28W PF:0.9758 Lamp Flux:5265.97x1 lm		
NAME: 8.03.005.0183 30° SP-F310B-26P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024090039
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: ×10cd		
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	1.55	1.47	1.34	1.09	0.82	0.60	0.39	0.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	3.05	2.86	2.53	1.93	1.46	1.03	0.63	0.24	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	7.74	7.47	6.98	6.19	5.05	3.90	3.03	2.22	1.46	0.95	0.51	0.05	0.00	0.00	0.00	0.00	0.00	0.00	
-60	12.3	11.8	10.9	9.61	7.64	6.05	4.78	3.57	2.50	1.54	0.68	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	22.7	21.9	20.5	18.5	15.8	12.5	9.55	7.38	5.45	3.74	2.32	1.05	0.33	0.00	0.00	0.00	0.00	0.00	
-50	32.6	31.1	28.7	25.5	21.4	16.3	12.5	9.59	6.97	4.75	2.94	1.46	0.07	0.00	0.00	0.00	0.00	0.00	
-45	55.3	52.8	48.8	43.6	37.3	29.8	21.8	16.2	11.9	8.32	5.43	3.18	1.41	0.15	0.00	0.00	0.00	0.00	
-40	76.3	71.7	65.0	56.9	47.6	36.5	26.0	19.3	13.8	9.45	5.98	3.38	1.44	0.00	0.00	0.00	0.00	0.00	
-35	132	124	112	96.9	80.1	62.9	44.9	31.0	22.0	15.2	9.90	5.91	3.07	0.92	0.00	0.00	0.00	0.00	
-30	182	168	147	124	99.1	74.7	51.0	35.0	24.3	16.4	10.3	5.92	2.89	0.55	0.00	0.00	0.00	0.00	
-25	302	273	234	191	149	112	77.7	50.6	34.4	23.3	15.0	8.81	4.70	1.91	0.00	0.00	0.00	0.00	
-20	403	349	285	224	168	121	79.8	51.5	34.8	22.9	14.1	8.04	4.01	1.26	0.00	0.00	0.00	0.00	
-15	636	535	417	309	226	163	111	69.6	45.6	30.1	19.0	11.2	6.00	2.58	0.12	0.00	0.00	0.00	
-10	799	626	458	323	230	162	105	65.2	42.8	27.4	16.9	9.62	4.88	1.79	0.00	0.00	0.00	0.00	
-5	977	780	566	392	274	194	130	80.1	51.5	33.6	21.1	12.4	6.63	2.91	0.24	0.00	0.00	0.00	
0	1017	759	523	355	248	172	110	68.1	44.5	28.7	17.6	9.91	4.99	1.84	0.00	0.00	0.00	0.00	
5	927	743	541	375	264	188	125	77.5	50.3	32.9	20.7	12.2	6.52	2.85	0.21	0.00	0.00	0.00	
10	708	562	415	296	213	150	97.0	61.2	40.8	26.3	16.3	9.33	4.71	1.69	0.00	0.00	0.00	0.00	
15	548	466	366	274	202	147	99.6	63.3	42.4	28.2	17.9	10.6	5.69	2.41	0.09	0.00	0.00	0.00	
20	332	291	240	190	145	105	68.6	46.0	31.7	21.0	13.0	7.49	3.71	1.02	0.00	0.00	0.00	0.00	
25	246	224	194	159	126	94.9	65.2	43.9	30.7	20.9	13.5	8.04	4.26	1.63	0.00	0.00	0.00	0.00	
30	146	135	119	101	81.8	60.7	42.0	29.8	21.2	14.4	9.10	5.24	2.50	0.32	0.00	0.00	0.00	0.00	
35	105	99.7	90.6	79.0	65.8	51.0	36.3	26.3	19.0	13.3	8.67	5.20	2.65	0.63	0.00	0.00	0.00	0.00	
40	61.2	57.9	52.9	46.5	38.3	28.7	21.5	16.3	11.9	8.18	5.22	2.92	1.11	0.00	0.00	0.00	0.00	0.00	
45	44.4	42.6	39.6	35.5	30.0	23.3	17.6	13.6	10.1	7.11	4.65	2.67	1.03	0.03	0.00	0.00	0.00	0.00	
50	26.4	25.2	23.3	20.5	16.5	12.8	10.2	7.91	5.76	3.95	2.40	1.09	0.00	0.00	0.00	0.00	0.00	0.00	
55	18.5	17.8	16.7	14.8	12.3	9.69	7.72	6.00	4.43	3.04	1.82	0.79	0.13	0.00	0.00	0.00	0.00	0.00	
60	10.1	9.65	8.76	7.30	5.90	4.85	3.79	2.82	1.93	1.13	0.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	6.33	6.09	5.59	4.73	3.77	3.03	2.32	1.63	1.14	0.72	0.32	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	2.38	2.22	1.79	1.36	1.00	0.65	0.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	1.20	1.15	1.00	0.76	0.57	0.40	0.22	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-09-06

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: