

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		15155.0 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	27.1V x 24.0H
	At 50% of Imax	11.0V x 11.2H
	At 90% of Imax	3.7V x 3.3H
Beam Flux	Total	963.5 lumens per klm.
	To 10% of Imax	754.0 lumens per klm.
	To 50% of Imax	294.6 lumens per klm.
	To 90% of Imax	23.4 lumens per klm.
Upward LOR		0.0 %
Downward LOR		96.3 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:222.1V I:0.3703A P:75.49W PF:0.9176 Lamp Flux:3251.17x1 lm		
NAME: 8.03.005.0180 10°SP-F310B-36P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010127
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

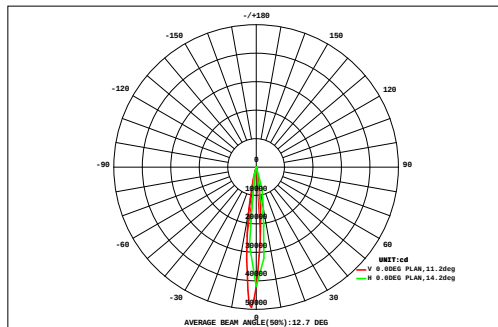

DATA OF LAMP		Eff:43.07lm/W	
MODEL	SP-F310B-36P-RDM	Imax(cd)	49271
NOMINAL POWER(W)	76	AVAILABILITY(%)	83.9
RATED VOLTAGE(V)	222	Avai. FLUX(lm)	2729
NOMINAL FLUX(lm)	3251.17	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	3251
TEST VOLTAGE(V)	222.1	θ @50%(H,V)	11,11DEG

		AREA FLUX DIAGRAM														UNIT:lm				Φ t	Φ a
		0.42	0.50	0.62	0.77	0.94	1.07	1.16	1.23	1.22	1.14	1.01	0.86	0.70	0.57	0.46	0.40	0.35	0.31	13.7	0.00
VERTICAL (DEG)	18	0.50	0.67	0.98	1.54	2.27	3.17	4.21	5.22	5.85	5.83	5.28	4.25	3.19	2.29	1.52	0.98	0.66	0.45	48.9	28.6
	16	0.58	0.91	1.49	2.66	4.25	6.33	8.82	11.3	12.9	13.0	11.8	9.46	7.01	4.93	3.14	1.86	1.12	0.67	102	79.4
	14	0.65	1.06	1.77	3.25	5.26	7.90	11.1	14.3	16.4	16.5	15.0	12.0	8.83	6.19	3.91	2.29	1.34	0.79	128	107
	12	1.31	2.23	4.11	6.60	9.84	13.7	17.6	20.0	19.9	17.8	14.0	10.2	7.07	4.36	2.49	1.43	0.80	0.50	154	135
	10	1.58	2.72	5.07	8.11	12.0	16.7	21.3	23.8	23.3	20.6	15.8	11.3	7.69	4.59	2.54	1.43	0.77	0.49	180	162
	8	1.31	2.28	4.41	7.36	11.8	17.7	23.8	29.4	33.5	31.2	24.6	18.1	12.4	7.67	4.52	2.48	1.31	0.73	234	217
	6	0.76	1.34	2.86	5.39	10.2	17.4	25.7	35.8	47.3	46.0	37.1	28.1	19.4	12.3	7.55	4.10	2.15	1.13	305	290
	4	0.65	1.16	2.64	5.26	10.6	18.9	28.6	40.9	55.6	54.4	44.0	33.3	23.1	14.6	9.00	4.86	2.53	1.30	351	338
	2	2.04	4.64	8.19	15.2	25.7	36.8	50.1	65.6	60.6	45.5	33.1	21.9	12.9	7.63	3.88	1.90	0.98	0.60	397	383
	0	2.42	5.67	9.89	18.4	31.0	43.7	59.2	77.3	67.8	48.2	34.0	21.6	11.9	6.84	3.14	1.42	0.71	0.48	444	431
-	2	1.69	3.76	6.72	12.3	20.9	30.3	41.4	54.3	52.1	40.4	29.6	20.0	12.1	7.17	3.83	1.96	1.02	0.61	340	323
	4	0.35	0.25	0.89	1.14	2.40	5.77	8.96	12.5	24.0	27.1	22.3	17.7	12.9	8.12	5.29	3.04	1.64	0.88	155	137
	6	0.03	0.00	0.00	0.00	0.00	0.08	0.56	1.24	14.6	22.2	19.3	16.4	12.8	8.15	5.59	3.30	1.79	0.94	107	96.5
	8	0.81	1.28	1.81	2.58	3.30	3.71	3.79	3.14	2.15	1.89	1.68	1.33	0.95	0.81	0.63	0.47	0.35	0.31	31.0	0.00
	10	0.83	1.26	1.51	1.88	1.63	0.64	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.15	8.02	0.00
	12	0.59	0.86	0.98	1.16	0.90	0.98	1.28	1.54	1.69	1.72	1.59	1.37	1.09	0.79	0.57	0.41	0.28	0.22	18.0	0.00
-18	14	0.22	0.24	0.34	0.44	0.67	1.03	1.51	2.01	2.41	2.66	2.59	2.37	1.99	1.47	1.09	0.81	0.57	0.40	22.8	0.00
	16	-18	-16	-14	-12	-10	-8	-6	-4	HORIZONTAL (DEG)				4	6	8	10	12	14	16	18
Φ t		16.7	30.8	54.3	94.0	154	226	309	400	441	396	313	230	156	98.5	59.1	33.1	18.4	11.0	3040	---
Φ a		0.00	5.05	26.8	69.6	132	212	300	390	433	388	305	224	150	70.7	21.4	1.47	0.00	0.00	---	2729

one-half-peak spread: U:5.0,D:6.1 , L:5.7,R:5.6


NEMA Beam Type: Type 2

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:222.1V I:0.3703A P:75.49W PF:0.9176 Lamp Flux:3251.17x1 lm		
NAME: 8.03.005.0180 10°SP-F310B-36P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010127
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

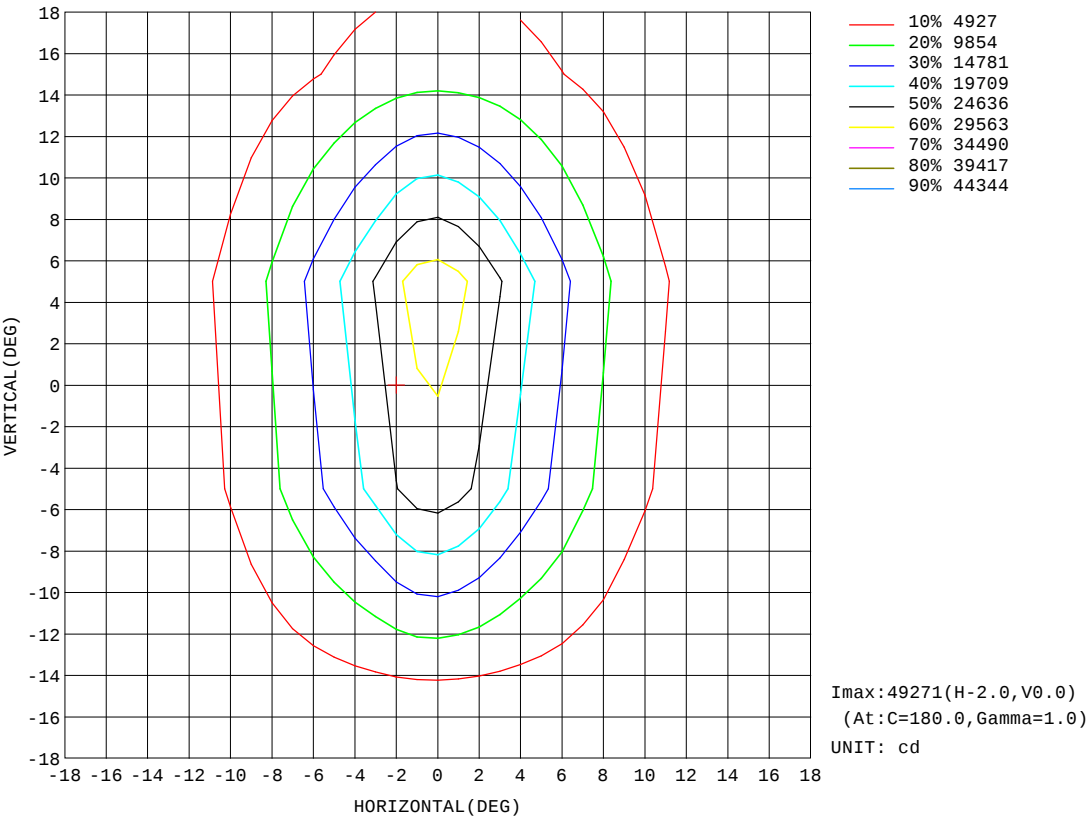


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:222.1V I:0.3703A P:75.49W PF:0.9176 Lamp Flux:3251.17x1 lm		
NAME: 8.03.005.0180 10°SP-F310B-36P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010127
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

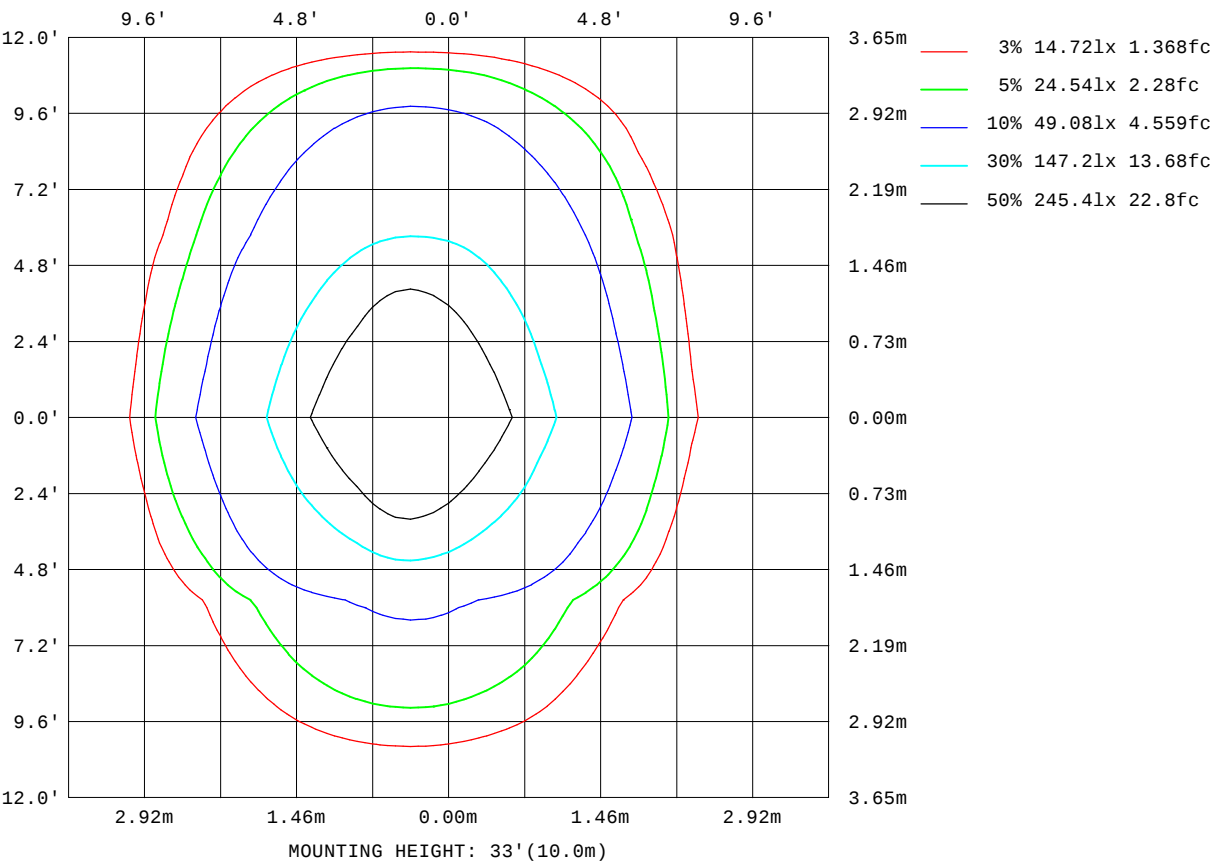


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:222.1V I:0.3703A P:75.49W PF:0.9176 Lamp Flux:3251.17x1 lm		
NAME: 8.03.005.0180 10°SP-F310B-36P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010127
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

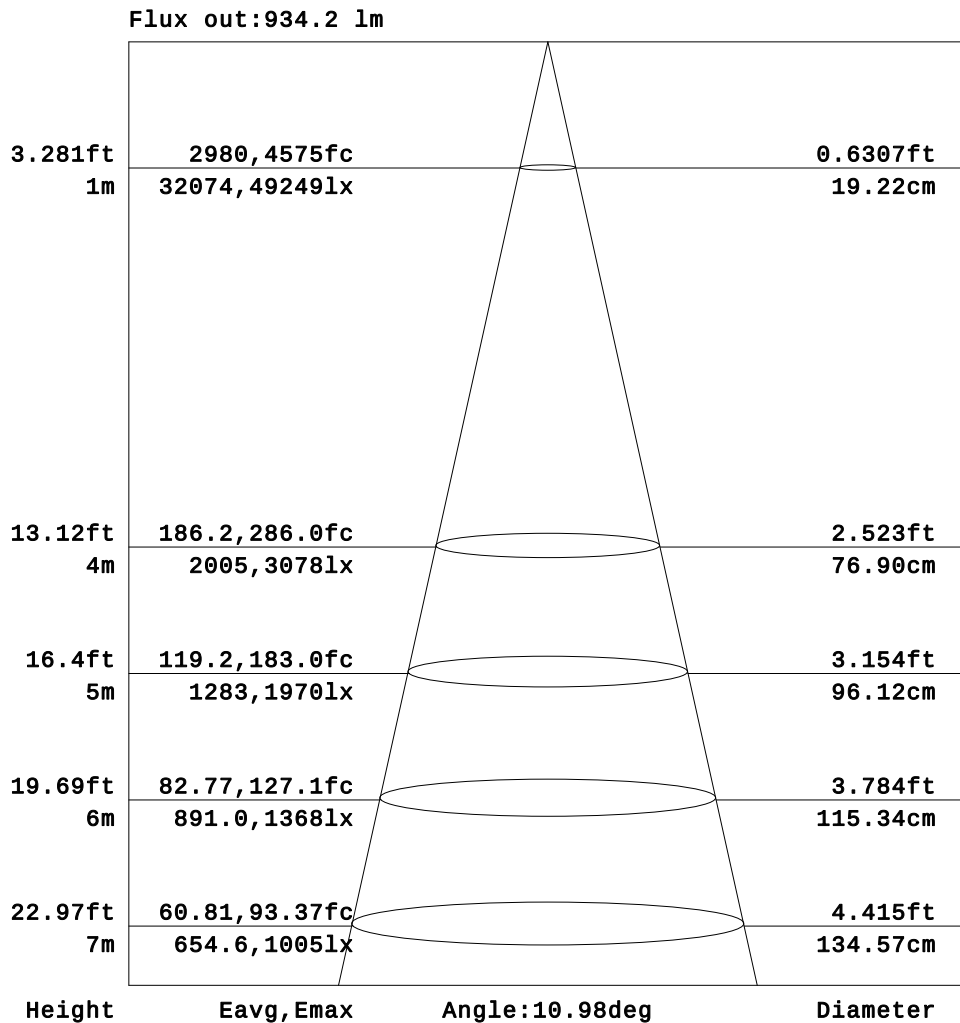


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

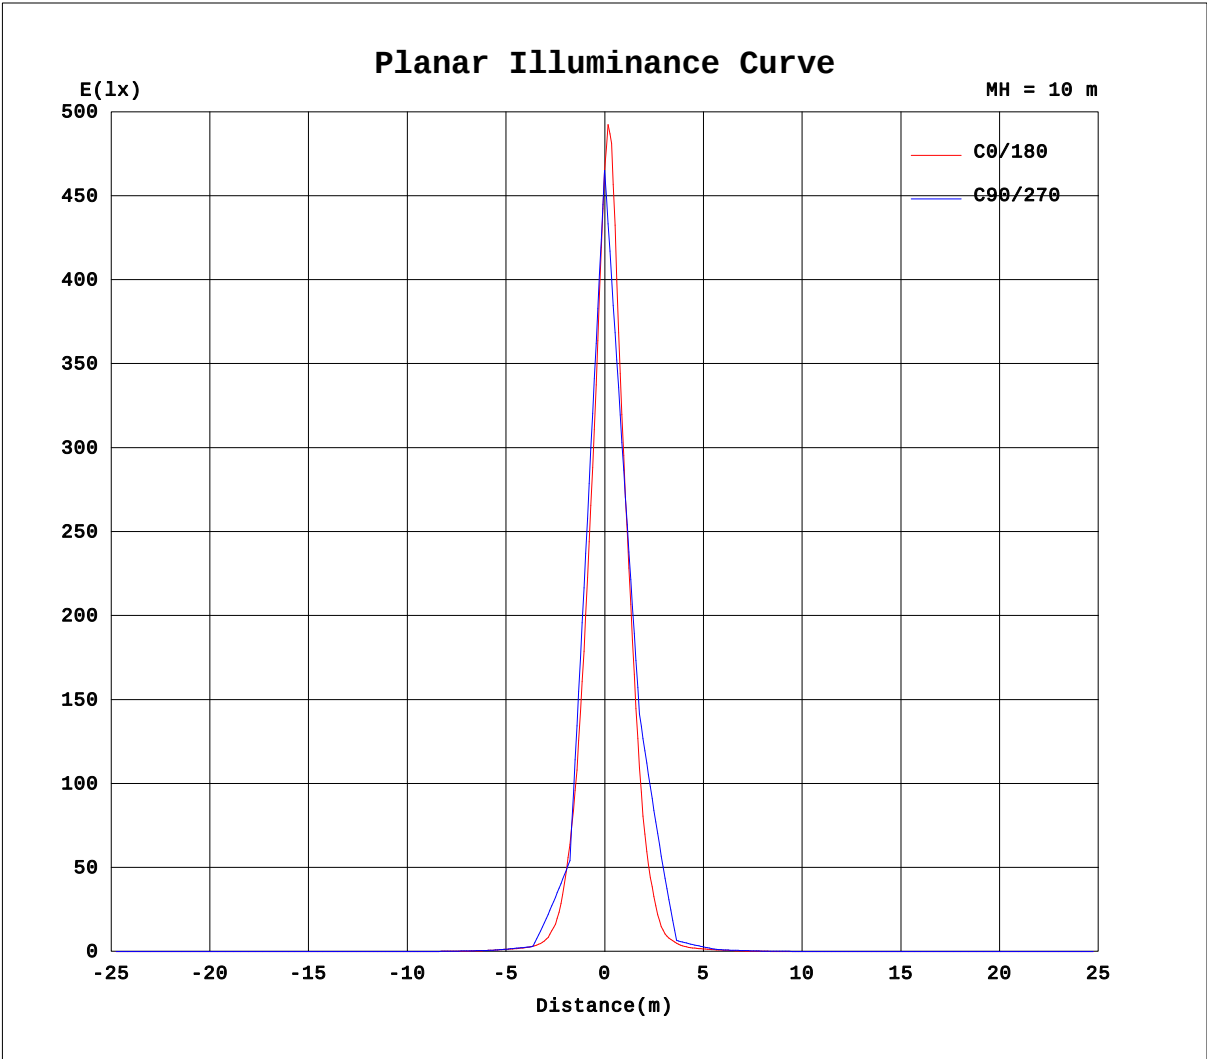

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:222.1V I:0.3703A P:75.49W PF:0.9176 Lamp Flux:3251.17x1 lm		
NAME: 8.03.005.0180 10°SP-F310B-36P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010127
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: ×10cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.32
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.14	0.17	0.24	0.49
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.23	0.31	0.37	0.57
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.14	0.30	0.52	0.68	0.80	0.97	1.18
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.42	0.71	0.93	1.16	1.34	1.52	1.64
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.19	0.45	0.94	1.43	1.85	2.19	2.46	2.69	2.86
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.20	0.54	1.12	1.86	2.50	3.05	3.45	3.79	4.04	4.15
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	0.39	0.91	1.61	2.57	3.55	4.55	5.48	6.83	7.87	8.30
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.38	0.95	1.75	2.82	4.05	5.38	6.81	8.46	11.1	12.3	12.3
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.43	1.06	1.95	3.16	4.80	6.25	7.6	9.15	11.4	12.3	12.3
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.32	0.93	1.82	3.04	4.73	7.25	10.4	13.6	16.8	20.0	23.2	25.1
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.23	0.82	1.69	2.89	4.72	7.49	10.7	14.0	17.3	20.6	23.9	26.8
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.55	1.33	2.43	4.06	6.61	9.47	12.3	15.2	18.1	21.0	23.9	26.8
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.37	1.08	2.09	3.53	5.93	8.18	10.4	12.7	15.0	17.3	19.6	21.9
0	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.68	1.54	2.76	4.69	8.89	13.1	17.4	21.7	26.0	30.3	34.6	38.9
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.39	1.12	2.16	3.64	6.10	9.37	12.6	15.9	19.2	22.5	25.8	29.1
10	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.60	1.44	2.58	4.31	7.25	10.5	13.8	17.1	20.4	23.7	27.0	30.3
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.26	0.91	1.84	3.09	5.02	7.97	10.9	13.8	16.7	19.6	22.5	25.4
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.36	1.06	2.00	3.23	5.10	7.91	10.8	13.7	16.6	19.5	22.4	25.3
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.51	1.22	2.16	3.47	5.39	7.30	9.21	11.1	13.0	14.9	16.8
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.48	1.15	2.01	3.13	4.63	6.46	8.29	10.1	11.9	13.8	15.7
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	0.53	1.15	1.99	3.00	4.25	5.72	7.31	8.81	10.3	11.8
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.36	0.88	1.60	2.38	3.09	3.80	4.52	5.22	5.91	6.60
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.33	0.74	1.32	1.92	2.51	3.14	3.80	4.39	4.98
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.32	0.76	1.19	1.71	2.28	2.94	3.35	3.90
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.29	0.53	0.91	1.42	2.03	2.58	3.13
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	0.47	1.02	1.68	2.00	2.51	3.02
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.16	0.41	1.12	1.67	2.18	2.69
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.33	1.15	1.35	1.55	1.75
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.41	0.71	0.46
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-31

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:222.1V I:0.3703A P:75.49W PF:0.9176 Lamp Flux:3251.17x1 lm		
NAME: 8.03.005.0180 10°SP-F310B-36P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:2024010127
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																		UNIT: ×10cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.19	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.42	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.65	0.45	0.25	0.16	0.09	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.87	0.61	0.43	0.27	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	1.27	1.05	0.83	0.64	0.49	0.31	0.21	0.13	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	1.56	1.34	1.07	0.88	0.70	0.54	0.37	0.19	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	2.84	2.58	2.23	1.89	1.55	1.17	0.81	0.52	0.30	0.15	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	3.94	3.57	3.11	2.63	2.10	1.51	1.00	0.64	0.40	0.23	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-35	7.86	6.73	5.38	4.42	3.54	2.68	1.94	1.28	0.79	0.47	0.23	0.08	0.00	0.00	0.00	0.00	0.00	0.00	
-30	11.0	8.77	6.84	5.50	4.29	3.24	2.32	1.49	0.86	0.49	0.29	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-25	22.7	18.9	15.4	12.8	7.83	4.89	3.49	2.38	1.48	0.85	0.45	0.24	0.00	0.00	0.00	0.00	0.00	0.00	
-20	31.7	25.8	22.4	16.5	7.83	5.33	3.69	2.49	1.52	0.81	0.42	0.20	0.00	0.00	0.00	0.00	0.00	0.00	
-15	236	115	48.2	25.2	15.8	9.00	5.17	3.47	2.25	1.30	0.65	0.33	0.06	0.00	0.00	0.00	0.00	0.00	
-10	341	139	46.2	25.8	17.4	8.02	5.15	3.38	2.14	1.18	0.53	0.26	0.00	0.00	0.00	0.00	0.00	0.00	
-5	1557	538	127	38.5	22.9	13.6	6.48	4.24	2.75	1.63	0.81	0.35	0.14	0.00	0.00	0.00	0.00	0.00	
0	1819	511	95.9	34.1	20.8	11.4	5.78	3.74	2.37	1.32	0.61	0.25	0.02	0.00	0.00	0.00	0.00	0.00	
5	1878	665	151	42.0	23.8	14.7	6.68	4.34	2.82	1.67	0.83	0.35	0.15	0.00	0.00	0.00	0.00	0.00	
10	798	267	70.4	30.1	19.1	9.52	5.42	3.53	2.25	1.25	0.56	0.23	0.01	0.00	0.00	0.00	0.00	0.00	
15	575	251	76.3	30.2	19.4	10.6	5.64	3.72	2.43	1.41	0.67	0.28	0.07	0.00	0.00	0.00	0.00	0.00	
20	60.5	38.4	26.6	20.5	11.6	6.14	4.14	2.79	1.72	0.91	0.40	0.15	0.00	0.00	0.00	0.00	0.00	0.00	
25	43.8	31.1	21.3	15.2	11.0	5.79	3.97	2.70	1.70	0.92	0.41	0.16	0.00	0.00	0.00	0.00	0.00	0.00	
30	17.5	14.8	10.7	7.04	5.19	3.77	2.74	1.77	1.00	0.49	0.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
35	11.7	10.4	8.33	5.82	4.40	3.31	2.37	1.58	0.91	0.44	0.15	0.05	0.00	0.00	0.00	0.00	0.00	0.00	
40	5.12	4.54	3.93	3.26	2.71	2.04	1.35	0.79	0.40	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
45	4.02	3.45	2.99	2.49	2.04	1.56	1.07	0.64	0.33	0.11	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
50	2.45	1.99	1.65	1.33	1.00	0.67	0.41	0.21	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
55	1.86	1.37	1.08	0.86	0.67	0.45	0.25	0.14	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.84	0.49	0.32	0.23	0.18	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.68	0.30	0.19	0.13	0.10	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:27.1DEG
Operators:QC1
Test Date:2024-01-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:61%
Test Distance:8.300m [K=1.0000]
Remarks: