

Test report

Test items	Cold start test
Test object	SP-F310A-40P-RDM
Purpose of detection	Whether it can be turned on and started in low temperature test
Test time	From 2024-11-13 until: 2024-11-13

Testing equipment: controllable constant temperature and humidity box, controller, power supply

Experimental methods and steps:

- Put SP-F310A-40P-RDM into a constant temperature and humidity box and set the parameter as -20°C for 120 minutes.
- Test whether the lamp can be normally lit after the experiment is completed

Test results: SP-F310A-40P-RDM can light up normally after 120 minutes of continuous ambient temperature -20°C; This experimental conclusion is only responsible for the sample.

Test data:

- The lamp was placed in a temperature environment of -20°C for 2h for a total of 120 minutes




测试人：黄文亮

审核人：陈海瑞

日期：2024 年 11 月 13 日

2. After 2h, the lamp can be normally lit (lit by default)

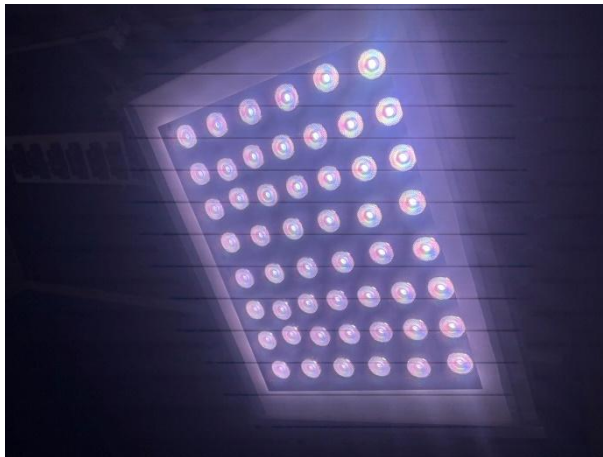

3. Confirm single side function color (R-G-B-W- all light)

