

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		22164.9 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	17.8V x 13.4H
	At 50% of Imax	10.3V x 8.4H
	At 90% of Imax	3.8V x 4.9H
Beam Flux	Total	941.4 lumens per klm.
	To 10% of Imax	573.0 lumens per klm.
	To 50% of Imax	319.5 lumens per klm.
	To 90% of Imax	35.5 lumens per klm.
Upward LOR		0.0 %
Downward LOR		94.1 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.4V I:2.085A P:453.9W PF:0.9878 Lamp Flux:36842.3x1 lm		
NAME: 8.03.006.0126 3° SP-F620A-108P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700080
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

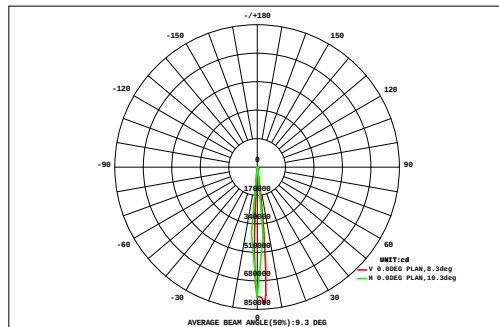

DATA OF LAMP		Eff:81.16lm/W	
MODEL	SP-F620A-108P-RDM	Imax(cd)	816606
NOMINAL POWER(W)	454	AVAILABILITY(%)	63.5
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	23392
NOMINAL FLUX(lm)	36842.3	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	36842
TEST VOLTAGE(V)	220.4	θ @50%(H,V)	8,10DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm			Φ t	Φ a
	9	4.85	5.45	5.97	6.73	7.59	8.60	9.76	10.9	12.0	12.8	13.2	13.2	12.4	11.8	10.6	9.48	8.32	7.33	171	0.00
	8	5.07	5.73	6.27	7.10	8.03	9.11	10.4	11.6	12.8	13.7	14.1	14.0	13.2	12.6	11.3	10.1	8.82	7.75	182	0.00
	7	5.30	6.00	6.58	7.47	8.46	9.62	11.0	12.3	13.6	14.5	15.0	14.9	14.0	13.4	12.0	10.7	9.31	8.17	192	0.00
	6	5.52	6.27	6.89	7.83	8.89	10.1	11.6	13.0	14.4	15.4	15.9	15.8	14.9	14.1	12.7	11.2	9.81	8.59	203	0.00
	5	5.47	7.36	7.59	9.24	12.8	43.0	73.1	113	136	134	134	146	148	121	80.4	42.5	30.0	13.6	1257	1201
	4	5.64	7.78	7.97	9.79	13.9	49.4	84.8	132	158	156	156	171	173	142	93.3	48.7	34.1	14.8	1457	1397
	3	5.82	8.19	8.35	10.3	15.0	55.8	96.4	150	181	178	178	195	198	162	106	54.9	38.2	16.1	1658	1594
	2	5.99	8.61	8.73	10.9	16.0	62.2	108	169	204	200	200	220	223	182	119	61.1	42.3	17.3	1858	1790
	1	6.17	9.03	9.11	11.5	17.1	68.6	120	188	227	223	222	244	247	202	132	67.2	46.4	18.6	2058	1987
	0	6.34	9.45	9.49	12.0	18.2	75.0	131	207	249	245	244	268	272	222	145	73.4	50.5	19.8	2259	2183
	-1	6.52	9.87	9.87	12.6	19.2	81.4	143	226	272	267	267	293	297	242	158	79.6	54.6	21.1	2459	2380
	-2	6.69	10.3	10.3	13.1	20.3	87.8	155	244	295	289	289	317	322	262	170	85.7	58.6	22.3	2659	2576
	-3	6.86	10.7	10.6	13.7	21.4	94.2	166	263	318	312	311	342	347	282	183	91.9	62.7	23.5	2860	2773
	-4	7.04	11.1	11.0	14.2	22.4	101	178	282	340	334	333	366	372	303	196	98.1	66.8	24.8	3060	2994
	-5	4.73	6.21	6.39	7.65	10.5	35.0	59.4	91.8	110	108	108	118	120	98.4	65.1	34.4	24.4	11.1	1020	949
	-6	4.45	5.66	5.86	6.90	9.15	28.3	47.3	72.6	86.9	85.6	85.4	93.4	94.6	77.8	51.8	27.9	20.0	9.60	813	752
	-7	4.17	5.11	5.33	6.16	7.84	21.6	35.3	53.4	63.7	62.8	62.7	68.4	69.2	57.1	38.5	21.3	15.6	8.12	606	511
	-8	3.89	4.56	4.80	5.41	6.53	14.9	23.2	34.2	40.5	40.0	39.9	43.3	43.8	36.5	25.2	14.8	11.3	6.65	399	303
-9	-9	-8	-7	-6	-5	-4	-3	-2	HORIZONTAL (DEG)					2	3	4	5	6	7	8	9
Φ t	101	137	141	173	243	856	1464	2273	2734	2691	2688	2944	2981	2442	1611	843	592	259	25172	---	
Φ a	0.00	0.00	0.00	0.00	0.00	782	1398	2226	2681	2635	2630	2886	2926	2390	1564	765	484	24.8	---	23392	

one-half-peak spread: U:5.1,D:5.2 , L:5.6,R:2.8


NEMA Beam Type: Type 1

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:220.4V I:2.085A P:453.9W PF:0.9878 Lamp Flux:36842.3x1 lm		
NAME: 8.03.006.0126 3° SP-F620A-108P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700080
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

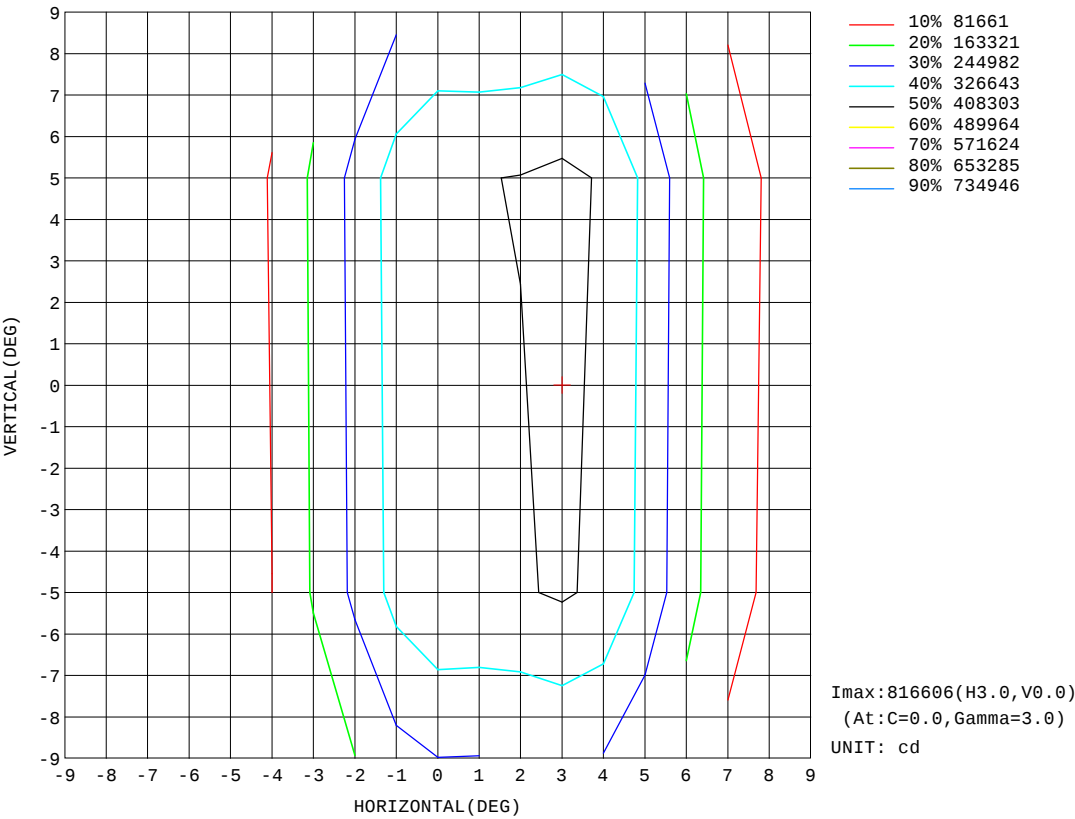


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.4V I:2.085A P:453.9W PF:0.9878 Lamp Flux:36842.3x1 lm		
NAME: 8.03.006.0126 3° SP-F620A-108P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700080
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

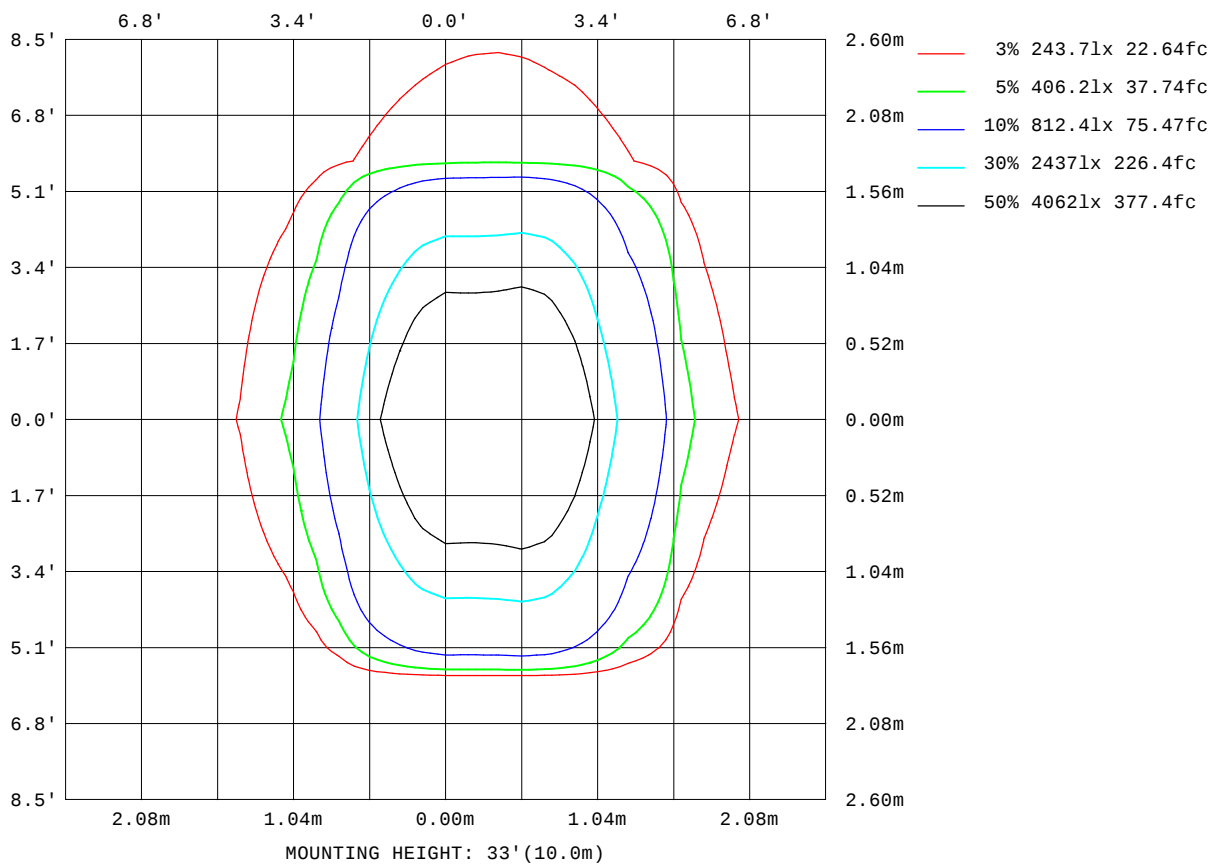


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.4V I:2.085A P:453.9W PF:0.9878 Lamp Flux:36842.3x1 lm		
NAME: 8.03.006.0126 3° SP-F620A-108P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700080
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

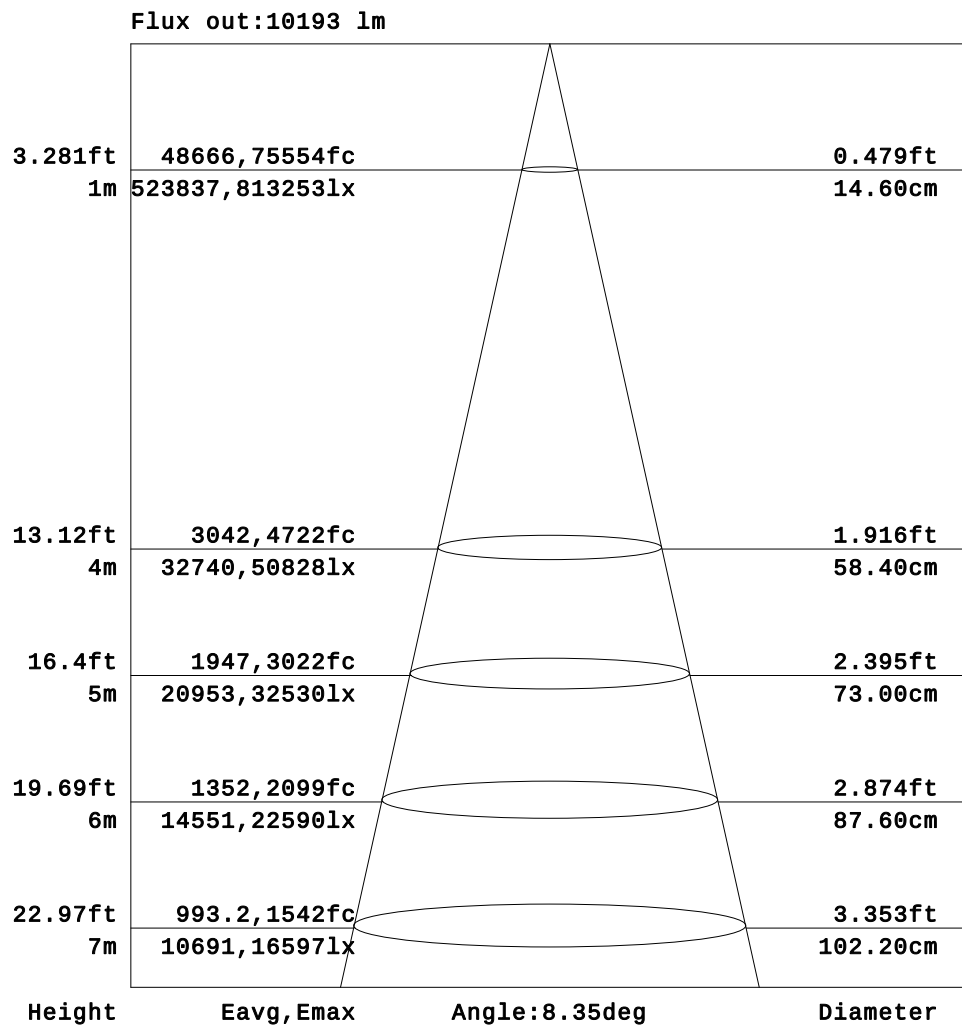


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

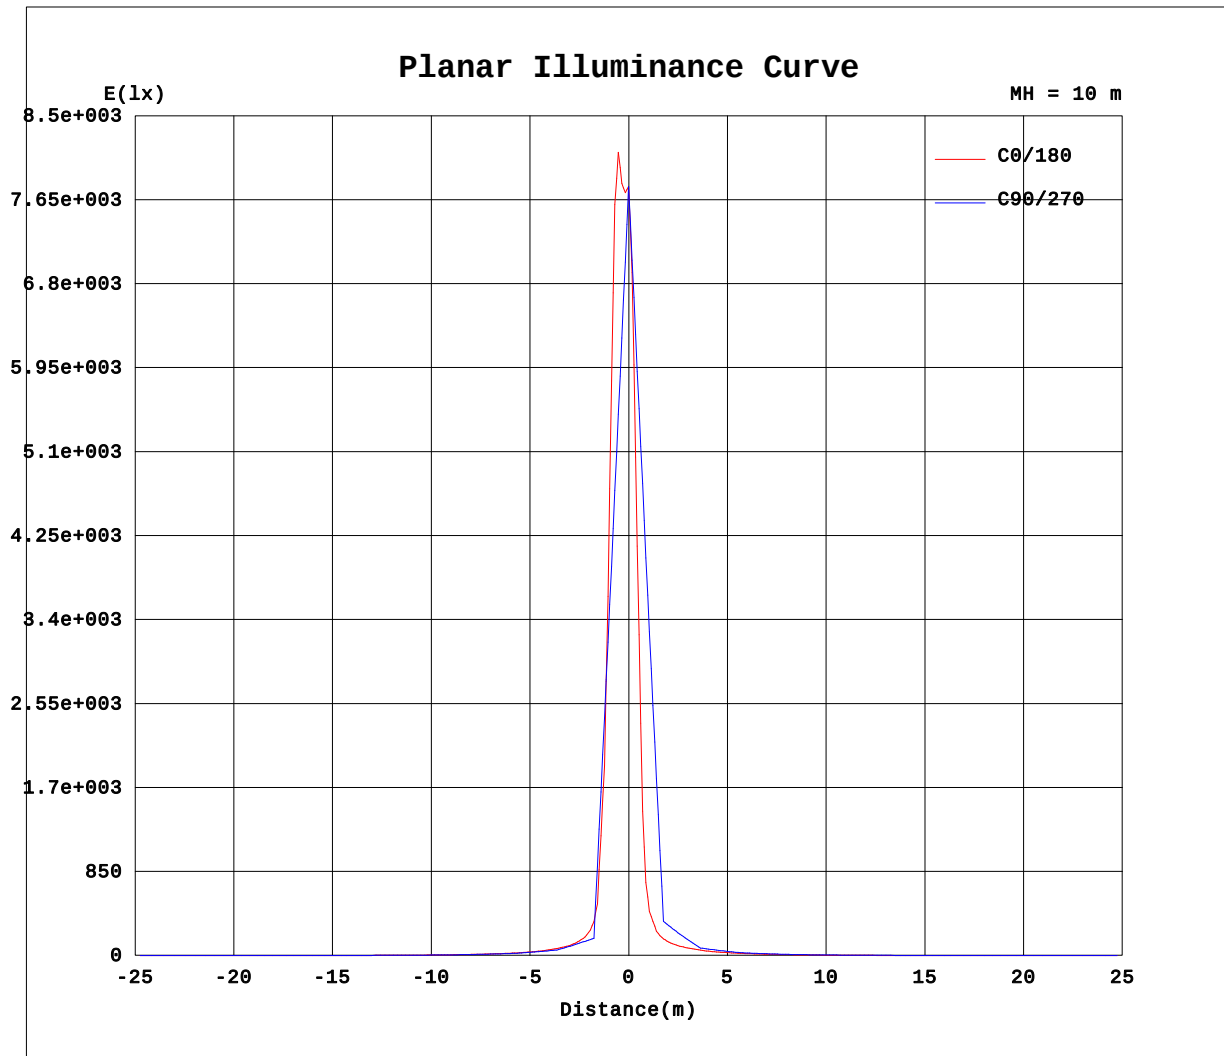

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 28.0DEG
Operators: QC1
Test Date: 2024-07-31

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 83%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.4V I:2.085A P:453.9W PF:0.9878 Lamp Flux:36842.3x1 lm		
NAME: 8.03.006.0126 3° SP-F620A-108P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700080
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: ×100cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.03	0.00	0.10	0.14	0.13	0.15	0.15	0.18	0.23	0.30	0.40	0.53	0.69	0.86	1.06	1.26	1.43	1.62	1.79
-75	0.02	0.00	0.10	0.16	0.26	0.29	0.34	0.50	0.71	0.97	1.27	1.57	1.89	2.21	2.52	2.80	3.05	3.30	3.54
-70	0.00	0.00	0.09	0.19	0.38	0.43	0.52	0.82	1.19	1.65	2.14	2.61	3.10	3.57	3.98	4.34	4.66	4.98	5.28
-65	0.00	0.00	0.04	0.11	0.32	0.58	0.97	1.51	2.12	2.78	3.50	4.22	5.00	5.75	6.36	6.82	7.17	7.51	7.81
-60	0.00	0.00	0.00	0.03	0.25	0.74	1.41	2.20	3.04	3.91	4.87	5.83	6.91	7.93	8.74	9.29	9.69	10.0	10.3
-55	0.00	0.00	0.00	0.08	0.48	1.19	2.11	3.13	4.26	5.54	6.79	7.87	8.89	9.89	10.7	11.4	11.9	12.3	12.7
-50	0.00	0.00	0.00	0.12	0.70	1.65	2.81	4.06	5.47	7.16	8.70	9.92	10.9	11.8	12.7	13.4	14.0	14.6	15.0
-45	0.00	0.00	0.00	0.26	1.05	2.23	3.60	5.23	6.93	8.63	10.1	11.5	12.8	14.1	15.4	16.5	17.5	18.3	19.0
-40	0.00	0.00	0.00	0.40	1.41	2.80	4.40	6.41	8.39	10.1	11.5	13.1	14.7	16.4	18.1	19.7	21.0	22.1	22.9
-35	0.00	0.00	0.00	0.57	1.79	3.33	5.22	7.47	9.41	11.2	12.9	14.9	17.2	19.6	22.2	24.7	27.0	28.7	29.8
-30	0.00	0.00	0.01	0.75	2.18	3.85	6.03	8.53	10.4	12.2	14.3	16.8	19.7	22.8	26.3	29.8	33.0	35.4	36.8
-25	0.00	0.00	0.06	0.96	2.46	4.34	6.85	9.26	11.2	13.3	15.9	19.0	22.8	27.3	32.6	38.2	44.0	49.6	53.2
-20	0.00	0.00	0.11	1.17	2.75	4.82	7.66	9.98	12.0	14.4	17.5	21.3	26.0	31.8	38.8	46.7	55.1	63.8	69.6
-15	0.00	0.00	0.15	1.26	2.93	5.14	8.06	10.4	12.6	15.3	18.9	23.3	29.2	36.6	46.3	61.2	79.9	105	128
-10	0.00	0.00	0.18	1.35	3.12	5.45	8.46	10.8	13.2	16.1	20.2	25.4	32.4	41.3	53.9	75.6	105	146	185
-5	0.00	0.00	0.20	1.42	3.28	5.74	8.73	11.1	13.5	16.6	20.9	26.5	34.1	44.3	60.8	88.9	142	448	3985
0	0.00	0.00	0.22	1.50	3.45	6.03	9.01	11.3	13.9	17.1	21.6	27.6	35.8	47.3	67.8	102	179	749	7785
5	0.00	0.00	0.20	1.49	3.40	5.91	8.91	11.2	13.7	16.9	21.3	27.0	35.1	45.8	63.8	95.0	155	483	4074
10	0.00	0.00	0.19	1.48	3.35	5.79	8.81	11.1	13.5	16.6	21.0	26.5	34.3	44.2	59.8	87.9	131	217	363
15	0.00	0.00	0.17	1.39	3.19	5.53	8.52	10.8	13.1	15.9	19.8	24.7	31.3	39.8	52.0	71.4	100	151	228
20	0.00	0.00	0.14	1.30	3.03	5.27	8.24	10.5	12.6	15.2	18.6	22.9	28.4	35.5	44.3	54.9	69.7	84.6	93.6
25	0.00	0.00	0.09	1.12	2.74	4.79	7.51	9.82	11.9	14.2	17.1	20.8	25.3	30.8	37.5	45.2	54.6	63.7	69.3
30	0.00	0.00	0.03	0.94	2.46	4.31	6.78	9.19	11.2	13.2	15.6	18.6	22.1	26.1	30.7	35.5	39.6	42.9	44.9
35	0.00	0.00	0.02	0.76	2.11	3.79	5.91	8.26	10.2	12.1	14.1	16.5	19.2	22.2	25.6	29.0	31.9	34.2	35.7
40	0.00	0.00	0.00	0.59	1.75	3.27	5.03	7.33	9.32	11.0	12.6	14.3	16.3	18.4	20.5	22.6	24.3	25.5	26.5
45	0.00	0.00	0.00	0.39	1.36	2.67	4.17	6.04	7.91	9.64	11.2	12.6	14.2	15.7	17.3	18.8	20.0	20.9	21.6
50	0.00	0.00	0.00	0.20	0.97	2.06	3.31	4.74	6.49	8.30	9.71	10.9	12.1	13.1	14.1	15.0	15.7	16.3	16.8
55	0.00	0.00	0.00	0.10	0.64	1.50	2.52	3.69	5.07	6.49	7.76	9.00	10.1	11.1	12.0	12.7	13.3	13.7	14.1
60	0.00	0.00	0.00	0.00	0.30	0.93	1.73	2.64	3.64	4.68	5.81	7.08	8.22	9.15	9.85	10.4	10.8	11.1	11.4
65	0.00	0.00	0.00	0.00	0.15	0.51	1.07	1.74	2.48	3.29	4.14	5.05	5.89	6.60	7.18	7.63	7.97	8.24	8.58
70	0.00	0.00	0.00	0.00	0.00	0.08	0.41	0.84	1.32	1.89	2.47	3.03	3.55	4.06	4.50	4.87	5.17	5.40	5.71
75	0.00	0.00	0.00	0.00	0.00	0.04	0.20	0.42	0.66	0.99	1.35	1.70	2.05	2.40	2.72	2.99	3.21	3.39	3.67
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.22	0.38	0.56	0.75	0.94	1.11	1.26	1.38	1.63
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2024-07-31

V(β) Range:-80 - 80DEG
 V(β) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.4V I:2.085A P:453.9W PF:0.9878 Lamp Flux:36842.3x1 lm		
NAME: 8.03.006.0126 3° SP-F620A-108P-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700080
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: ×100cd		
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	1.58	1.52	1.44	1.31	1.17	1.02	0.89	0.76	0.64	0.54	0.47	0.41	0.35	0.28	0.15	0.03	0.00	0.01	
-75	3.35	3.28	3.15	2.96	2.72	2.45	2.18	1.88	1.60	1.33	1.07	0.81	0.57	0.36	0.17	0.03	0.00	0.01	
-70	5.12	5.03	4.87	4.61	4.27	3.88	3.46	3.00	2.56	2.12	1.67	1.22	0.79	0.44	0.18	0.03	0.00	0.00	
-65	7.64	7.53	7.35	7.05	6.64	6.06	5.40	4.63	3.88	3.19	2.52	1.88	1.24	0.66	0.25	0.03	0.00	0.00	
-60	10.2	10.0	9.83	9.50	9.00	8.24	7.34	6.26	5.20	4.26	3.38	2.54	1.68	0.88	0.32	0.03	0.00	0.00	
-55	12.5	12.3	12.0	11.5	10.9	10.1	9.13	8.10	7.02	5.81	4.50	3.35	2.29	1.31	0.52	0.07	0.00	0.00	
-50	14.8	14.6	14.2	13.6	12.8	11.9	10.9	9.95	8.85	7.36	5.63	4.16	2.90	1.73	0.72	0.11	0.00	0.00	
-45	18.7	18.3	17.6	16.6	15.4	14.0	12.7	11.3	10.1	8.58	6.90	5.12	3.52	2.19	0.99	0.19	0.00	0.00	
-40	22.6	22.0	21.0	19.6	17.9	16.2	14.4	12.7	11.3	9.79	8.18	6.07	4.14	2.64	1.26	0.27	0.00	0.00	
-35	29.6	28.6	26.8	24.4	21.8	19.2	16.7	14.5	12.5	10.8	9.06	7.07	4.81	3.06	1.55	0.39	0.00	0.00	
-30	36.5	35.1	32.6	29.3	25.7	22.2	19.1	16.2	13.8	11.8	9.94	8.07	5.48	3.48	1.85	0.52	0.00	0.00	
-25	52.4	48.3	42.5	36.8	31.3	26.2	21.8	18.2	15.0	12.7	10.6	8.62	6.10	3.81	2.07	0.65	0.00	0.00	
-20	68.4	61.4	52.5	44.3	36.9	30.2	24.6	20.1	16.3	13.5	11.2	9.17	6.73	4.13	2.28	0.77	0.00	0.00	
-15	123	97.5	74.3	56.5	43.3	34.3	27.3	21.8	17.4	14.3	11.8	9.60	7.20	4.41	2.43	0.87	0.02	0.00	
-10	177	134	96.1	68.8	49.7	38.5	29.9	23.5	18.6	15.1	12.3	10.0	7.68	4.69	2.59	0.97	0.03	0.00	
-5	3032	248	120	79.0	54.2	40.6	31.5	24.5	19.2	15.3	12.5	10.1	7.80	4.76	2.64	0.98	0.04	0.00	
0	5886	361	143	89.1	58.7	42.8	33.0	25.5	19.8	15.6	12.7	10.3	7.92	4.83	2.68	0.99	0.06	0.00	
5	3110	275	129	83.9	56.4	41.8	32.3	25.0	19.5	15.5	12.6	10.2	7.87	4.81	2.66	0.99	0.06	0.00	
10	334	188	115	78.8	54.1	40.9	31.5	24.5	19.2	15.4	12.5	10.2	7.83	4.78	2.65	0.99	0.05	0.00	
15	213	134	89.7	65.0	47.6	37.1	29.1	23.0	18.3	14.8	12.1	9.86	7.46	4.56	2.52	0.92	0.04	0.00	
20	91.6	80.1	64.7	51.1	41.2	33.3	26.7	21.5	17.3	14.1	11.7	9.53	7.10	4.33	2.39	0.84	0.03	0.00	
25	68.1	61.2	51.6	42.7	35.3	29.1	23.9	19.5	16.0	13.3	11.1	9.05	6.53	4.04	2.21	0.76	0.01	0.00	
30	44.5	42.3	38.6	34.2	29.3	24.9	21.0	17.6	14.8	12.5	10.5	8.57	5.97	3.75	2.04	0.68	0.00	0.00	
35	35.4	33.8	31.3	28.2	24.7	21.4	18.4	15.7	13.4	11.5	9.67	7.64	5.23	3.31	1.78	0.55	0.00	0.00	
40	26.2	25.3	24.0	22.2	20.1	17.9	15.8	13.8	12.1	10.5	8.84	6.72	4.50	2.88	1.52	0.42	0.00	0.00	
45	21.4	20.8	19.9	18.6	17.1	15.5	13.8	12.3	10.8	9.31	7.55	5.63	3.82	2.42	1.23	0.31	0.00	0.00	
50	16.7	16.3	15.8	15.0	14.1	13.1	11.9	10.7	9.57	8.11	6.27	4.54	3.15	1.96	0.95	0.20	0.00	0.00	
55	14.0	13.7	13.3	12.8	12.0	11.2	10.1	8.96	7.69	6.39	4.96	3.63	2.49	1.49	0.67	0.11	0.00	0.00	
60	11.3	11.1	10.9	10.5	9.97	9.27	8.37	7.17	5.81	4.66	3.65	2.71	1.82	1.01	0.39	0.03	0.00	0.00	
65	8.47	8.31	8.10	7.78	7.31	6.75	6.06	5.19	4.25	3.41	2.64	1.91	1.24	0.65	0.22	0.01	0.00	0.00	
70	5.61	5.48	5.31	5.04	4.65	4.23	3.75	3.21	2.69	2.15	1.62	1.11	0.66	0.28	0.05	0.00	0.00	0.00	
75	3.55	3.44	3.32	3.15	2.88	2.59	2.27	1.91	1.57	1.23	0.89	0.59	0.33	0.14	0.02	0.00	0.00	0.00	
80	1.50	1.41	1.34	1.26	1.10	0.95	0.79	0.61	0.45	0.30	0.17	0.06	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: