

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		22986.2 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	17.7V x 12.9H
	At 50% of Imax	10.0V x 8.1H
	At 90% of Imax	3.7V x 4.9H
Beam Flux	Total	915.7 lumens per klm.
	To 10% of Imax	581.1 lumens per klm.
	To 50% of Imax	329.5 lumens per klm.
	To 90% of Imax	44.8 lumens per klm.
Upward LOR		0.0 %
Downward LOR		91.6 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.5V I:0.6014A P:121.2W PF:0.9102 Lamp Flux:2188.29x1 lm		
NAME: 8.03.006.0126 3° SP-F620A-108P-RDM-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700083
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

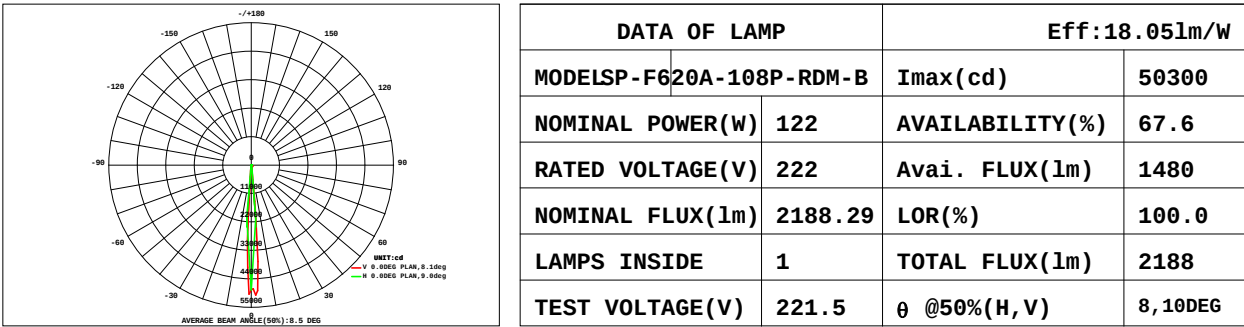

		AREA FLUX DIAGRAM															UNIT:lm			Φ t	Φ a
VERTICAL (DEG)	9	0.32	0.35	0.40	0.45	0.52	0.60	0.69	0.80	0.89	0.94	0.94	0.88	0.79	0.68	0.58	0.49	0.42	0.37	11.1	0.00
	8	0.34	0.38	0.43	0.49	0.56	0.66	0.76	0.87	0.97	1.02	1.01	0.94	0.84	0.71	0.60	0.51	0.44	0.38	11.9	0.00
	7	0.36	0.40	0.46	0.52	0.60	0.71	0.82	0.94	1.04	1.10	1.09	1.00	0.88	0.75	0.62	0.52	0.45	0.39	12.6	0.00
	6	0.38	0.43	0.49	0.56	0.64	0.76	0.88	1.01	1.12	1.18	1.16	1.06	0.93	0.78	0.65	0.54	0.46	0.41	13.4	0.00
	5	0.29	0.33	0.38	0.38	0.75	0.66	1.43	4.23	6.01	8.78	8.46	8.17	8.94	9.43	7.80	4.74	3.29	1.38	75.4	69.8
	4	0.29	0.33	0.39	0.37	0.80	0.68	1.58	4.87	6.96	10.2	9.85	9.51	10.4	11.0	9.12	5.51	3.81	1.56	87.3	84.5
	3	0.29	0.34	0.39	0.37	0.86	0.70	1.74	5.52	7.91	11.7	11.2	10.9	11.9	12.6	10.4	6.29	4.34	1.75	99.3	96.3
	2	0.29	0.34	0.40	0.36	0.91	0.73	1.89	6.16	8.86	13.1	12.6	12.2	13.4	14.2	11.8	7.07	4.86	1.94	111	108
	1	0.29	0.34	0.40	0.36	0.96	0.75	2.04	6.80	9.81	14.6	14.0	13.5	14.9	15.8	13.1	7.84	5.39	2.12	123	120
	0	0.49	0.45	1.16	0.94	2.41	7.94	11.4	16.6	15.7	14.8	16.4	17.4	14.1	8.04	5.37	1.89	0.94	0.70	137	132
	-1	0.53	0.47	1.30	1.04	2.71	9.26	13.2	18.9	17.5	16.0	17.9	19.2	15.2	7.94	5.05	1.45	0.56	0.60	149	143
	-2	0.57	0.50	1.44	1.14	3.02	10.6	15.0	21.2	19.4	17.3	19.5	21.0	16.3	7.83	4.72	1.00	0.18	0.49	161	156
-3	0.60	0.52	1.58	1.24	3.33	11.9	16.8	23.5	21.2	18.5	21.0	22.8	17.4	7.72	4.40	0.55	0.00	0.39	174	170	
-4	0.64	0.54	1.72	1.34	3.63	13.2	18.6	25.8	23.1	19.7	22.6	24.6	18.5	7.61	4.08	0.11	0.00	0.28	186	183	
-5	0.24	0.29	0.27	0.28	0.51	0.00	0.35	2.62	4.44	7.23	6.74	6.32	7.37	8.42	7.08	4.39	3.07	1.23	60.8	57.7	
-6	0.20	0.26	0.12	0.17	0.19	0.00	0.00	0.30	2.56	5.97	5.13	4.47	6.23	8.48	7.36	4.80	3.42	1.31	51.0	48.4	
-7	0.16	0.23	0.00	0.06	0.00	0.00	0.00	0.00	0.68	4.70	3.53	2.62	5.10	8.54	7.64	5.21	3.77	1.40	43.6	41.1	
-8	0.12	0.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.44	1.92	0.76	3.96	8.60	7.92	5.62	4.12	1.48	38.2	35.6	
-9	-9	-8	-7	-6	-5	-4	-3	-2	HORIZONTAL (DEG)					2	3	4	5	6	7	8	9
Φ t	6.40	6.70	11.3	10.1	22.4	59.2	87.1	140	148	170	175	177	167	139	108	58.5	39.5	18.2	1545	---	
Φ a	0.00	0.00	3.31	0.00	15.1	53.0	82.2	136	144	166	171	173	164	136	106	53.4	36.1	7.37	---	1446	


one-half-peak spread: U:5.0,D:5.1 , L:2.3,R:2.8 NEMA Beam Type: Type 1

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.5V I:0.6014A P:121.2W PF:0.9102 Lamp Flux:2188.29x1 lm		
NAME: 8.03.006.0126 3° SP-F620A-108P-RDM-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700083
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

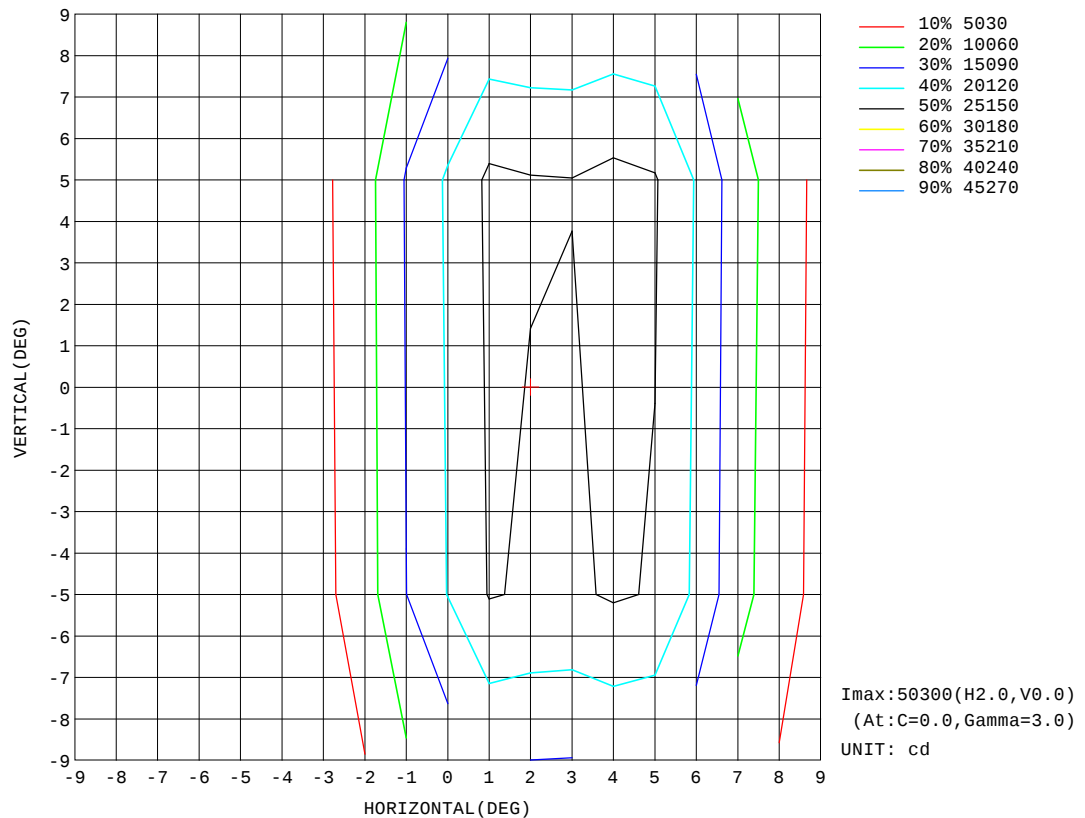


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:221.5V I:0.6014A P:121.2W PF:0.9102 Lamp Flux:2188.29x1 lm		
NAME: 8.03.006.0126 3° SP-F620A-108P-RDM-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700083
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

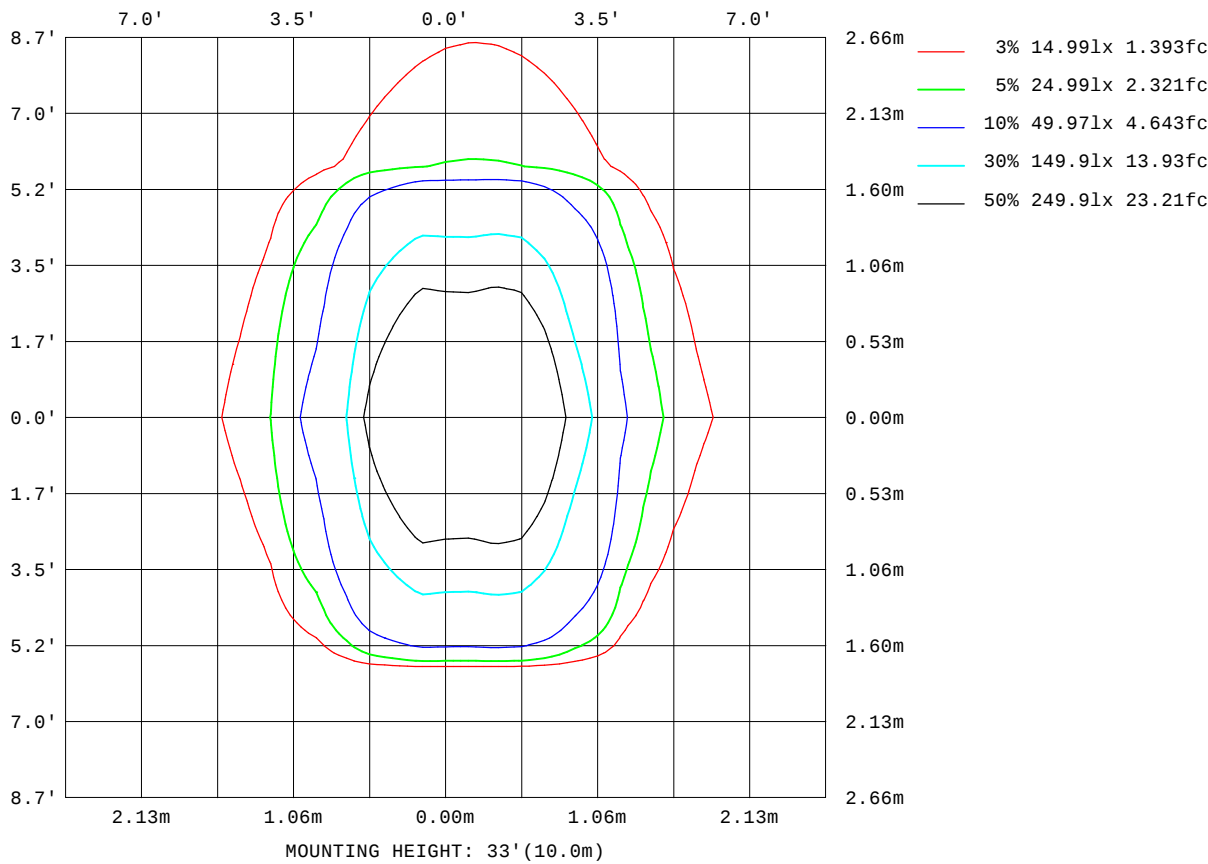


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:221.5V I:0.6014A P:121.2W PF:0.9102 Lamp Flux:2188.29x1 lm		
NAME: 8.03.006.0126 3° SP-F620A-108P-RDM-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700083
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

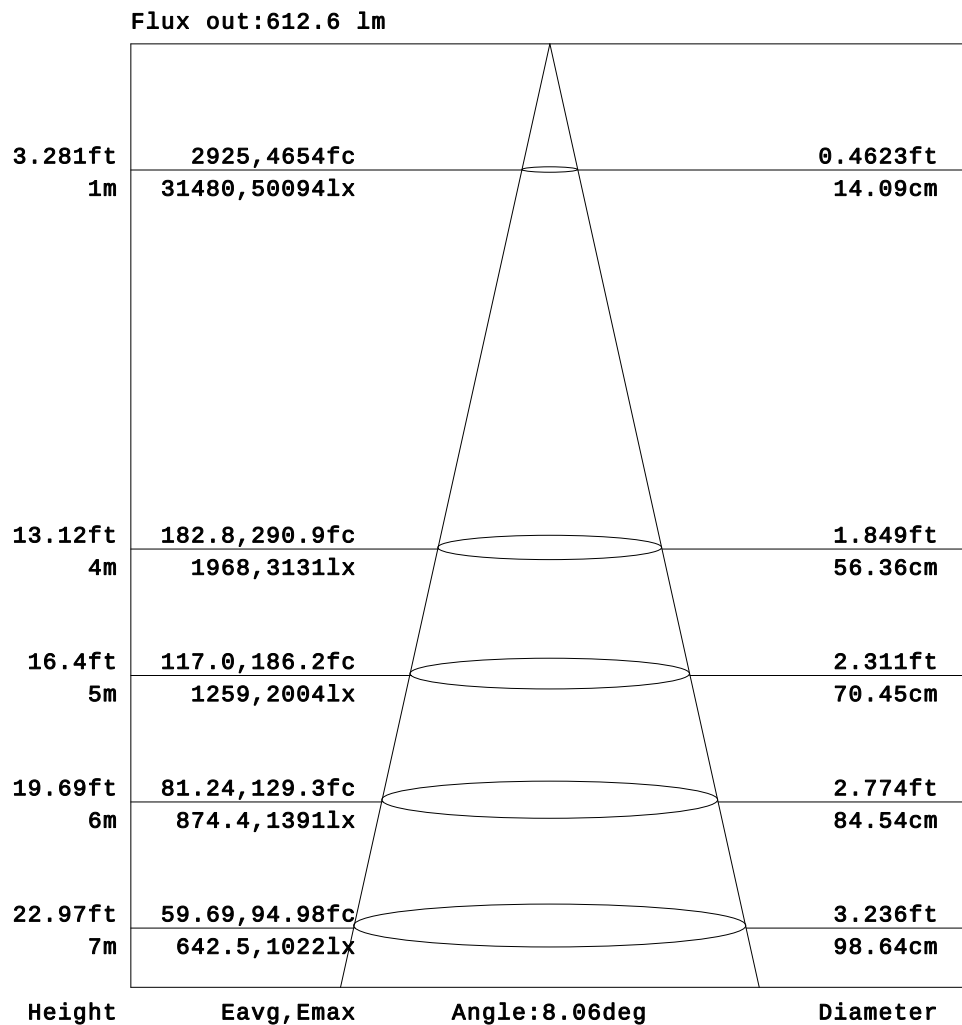


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

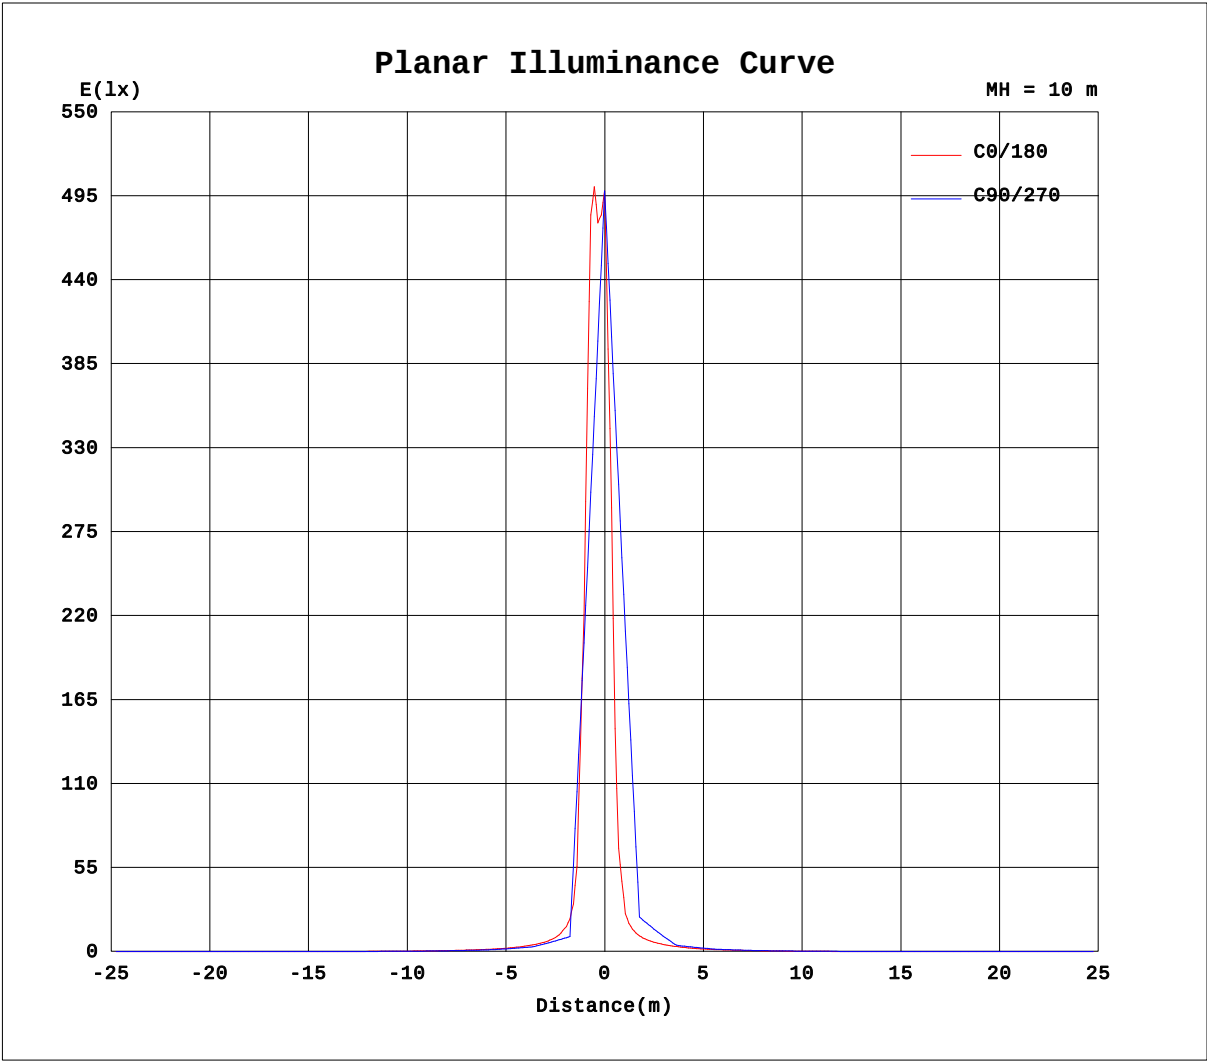

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.5V I:0.6014A P:121.2W PF:0.9102 Lamp Flux:2188.29x1 lm		
NAME: 8.03.006.0126 3° SP-F620A-108P-RDM-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700083
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: ×10cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.17	0.29	0.38	0.49	0.56
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.18	0.44	0.66	0.84	1.06	1.11
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.41	0.68	0.98	1.32	1.71	2.01	2.23	2.44	2.59
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.45	1.03	1.61	2.21	2.79	3.25	3.56	3.79	4.00	4.03
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	0.57	1.16	1.97	2.63	3.24	3.82	4.32	4.70	5.00	5.25	5.46
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.61	1.50	2.54	3.45	4.18	4.74	5.27	5.72	6.11	6.43	6.73	6.82
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.23	0.95	2.07	3.10	4.07	4.92	5.69	6.44	7.13	7.76	8.30	8.73	9.08
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.89	2.16	3.43	4.50	5.35	6.29	7.23	8.18	9.07	9.88	10.5	11.1	11.3
-35	0.00	0.00	0.00	0.00	0.00	0.08	0.93	2.34	3.67	4.84	5.89	7.07	8.37	9.74	11.2	12.5	13.8	14.7	15.4
-30	0.00	0.00	0.00	0.00	0.00	0.60	2.05	3.62	4.88	6.04	7.38	8.89	10.6	12.4	14.4	16.3	17.9	19.0	19.4
-25	0.00	0.00	0.00	0.00	0.00	0.40	1.89	3.55	4.88	6.22	7.76	9.63	11.8	14.3	17.2	20.3	23.4	26.6	28.8
-20	0.00	0.00	0.00	0.00	0.00	1.23	3.10	4.61	5.95	7.58	9.61	12.1	15.0	18.6	22.5	26.8	31.4	36.2	38.5
-15	0.00	0.00	0.00	0.00	0.00	0.85	2.69	4.34	5.81	7.46	9.57	12.2	15.7	19.9	25.3	33.3	43.2	56.0	69.3
-10	0.00	0.00	0.00	0.00	0.18	1.74	3.71	5.25	6.88	8.91	11.5	14.9	19.6	25.2	33.7	47.4	64.4	87.0	105
-5	0.00	0.00	0.00	0.00	0.00	1.19	3.16	4.81	6.39	8.31	10.8	14.1	18.6	24.3	33.4	49.1	75.9	165	2025
0	0.00	0.00	0.00	0.00	0.38	2.12	4.04	5.60	7.31	9.55	12.5	16.5	21.8	29.3	44.2	67.9	126	683	4827
5	0.00	0.00	0.00	0.00	0.00	1.26	3.25	4.88	6.47	8.40	11.0	14.3	19.0	25.0	34.7	52.0	81.9	182	2080
10	0.00	0.00	0.00	0.00	0.29	1.93	3.87	5.40	7.05	9.14	11.9	15.5	20.6	26.9	37.6	54.8	82.3	142	258
15	0.00	0.00	0.00	0.00	0.00	1.05	2.94	4.56	6.05	7.76	10.00	12.9	16.7	21.4	27.8	38.2	52.9	78.0	131
20	0.00	0.00	0.00	0.00	0.08	1.54	3.42	4.89	6.33	8.03	10.2	13.0	16.4	20.6	25.5	31.6	40.1	47.3	51.0
25	0.00	0.00	0.00	0.00	0.00	0.64	2.24	3.89	5.26	6.65	8.35	10.4	13.0	16.0	19.5	23.6	28.6	33.5	36.8
30	0.00	0.00	0.00	0.00	0.00	0.87	2.48	4.01	5.24	6.55	8.04	9.82	11.9	14.2	16.7	19.3	21.3	22.8	23.7
35	0.00	0.00	0.00	0.00	0.00	0.19	1.30	2.79	4.14	5.28	6.48	7.81	9.31	11.0	12.8	14.7	16.3	17.5	18.3
40	0.00	0.00	0.00	0.00	0.00	0.17	1.30	2.72	3.96	4.97	5.95	6.97	8.06	9.21	10.4	11.4	12.2	12.8	13.3
45	0.00	0.00	0.00	0.00	0.00	0.00	0.41	1.41	2.60	3.69	4.63	5.50	6.35	7.21	8.07	8.87	9.52	10.0	10.4
50	0.00	0.00	0.00	0.00	0.00	0.00	0.16	1.05	2.14	3.19	4.02	4.71	5.34	5.91	6.44	6.89	7.23	7.49	7.73
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.34	0.87	1.74	2.52	3.23	3.89	4.47	4.97	5.37	5.67	5.90	6.14
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.30	0.92	1.60	2.29	2.94	3.45	3.83	4.11	4.31	4.47	4.64
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.34	0.66	1.01	1.36	1.80	2.15	2.43	2.63	2.79	2.97
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.15	0.45	0.71	0.92	1.09	1.22	1.35
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.17	0.31	0.42	0.51	0.58	0.67
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2024-07-31

V(β) Range:-80 - 80DEG
 V(β) Interval: 5.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.5V I:0.6014A P:121.2W PF:0.9102 Lamp Flux:2188.29x1 lm		
NAME: 8.03.006.0126 3° SP-F620A-108P-RDM-B	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700083
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																		UNIT: ×10cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.56	0.51	0.47	0.40	0.31	0.19	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	1.06	1.00	0.89	0.73	0.53	0.29	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	2.57	2.49	2.41	2.26	2.03	1.71	1.34	0.97	0.66	0.37	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	3.99	3.93	3.82	3.61	3.30	2.85	2.31	1.68	1.08	0.51	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	5.43	5.32	5.19	4.97	4.64	4.21	3.69	3.10	2.47	1.74	0.94	0.38	0.00	0.00	0.00	0.00	0.00	0.00	
-50	6.75	6.62	6.40	6.09	5.66	5.17	4.61	4.02	3.30	2.34	1.29	0.42	0.00	0.00	0.00	0.00	0.00	0.00	
-45	9.03	8.83	8.53	8.06	7.45	6.75	6.00	5.23	4.46	3.56	2.54	1.42	0.40	0.00	0.00	0.00	0.00	0.00	
-40	11.1	10.8	10.3	9.58	8.69	7.74	6.77	5.84	4.94	3.98	2.89	1.53	0.39	0.00	0.00	0.00	0.00	0.00	
-35	15.3	14.9	14.1	13.0	11.6	10.1	8.75	7.41	6.21	5.09	3.98	2.73	1.30	0.20	0.00	0.00	0.00	0.00	
-30	19.2	18.4	17.1	15.3	13.3	11.4	9.64	7.99	6.58	5.31	4.12	2.80	1.15	0.00	0.00	0.00	0.00	0.00	
-25	28.8	26.9	24.0	20.9	17.9	15.0	12.3	10.0	8.08	6.47	5.10	3.78	2.24	0.64	0.00	0.00	0.00	0.00	
-20	37.2	33.1	28.5	24.2	20.1	16.2	13.0	10.4	8.23	6.49	5.03	3.65	1.90	0.35	0.00	0.00	0.00	0.00	
-15	69.7	57.2	44.4	34.5	26.0	20.5	16.2	12.7	9.88	7.69	5.99	4.48	2.96	1.06	0.00	0.00	0.00	0.00	
-10	93.5	70.3	51.9	37.5	27.2	21.0	16.2	12.5	9.65	7.45	5.69	4.16	2.45	0.62	0.00	0.00	0.00	0.00	
-5	2481	202	80.3	51.2	34.6	25.1	19.3	14.6	11.1	8.49	6.53	4.87	3.32	1.31	0.00	0.00	0.00	0.00	
0	2247	175	79.8	50.3	32.9	24.0	18.2	13.7	10.3	7.86	5.98	4.36	2.63	0.72	0.00	0.00	0.00	0.00	
5	2554	226	89.3	55.3	36.9	26.2	19.9	15.0	11.4	8.67	6.64	4.95	3.39	1.36	0.00	0.00	0.00	0.00	
10	195	101	64.3	44.2	30.0	22.6	17.3	13.3	10.1	7.73	5.89	4.32	2.60	0.71	0.00	0.00	0.00	0.00	
15	149	86.7	57.6	41.1	29.9	22.6	17.5	13.6	10.5	8.10	6.25	4.68	3.14	1.18	0.00	0.00	0.00	0.00	
20	49.4	43.5	35.5	28.2	22.7	18.3	14.3	11.3	8.81	6.89	5.31	3.88	2.09	0.44	0.00	0.00	0.00	0.00	
25	37.3	34.5	30.1	25.0	20.7	17.0	13.7	11.1	8.81	6.98	5.47	4.09	2.51	0.79	0.00	0.00	0.00	0.00	
30	23.4	22.3	20.5	18.2	15.5	13.1	10.9	8.93	7.24	5.81	4.51	3.16	1.41	0.12	0.00	0.00	0.00	0.00	
35	18.5	17.9	16.8	15.4	13.5	11.7	9.93	8.32	6.88	5.61	4.41	3.12	1.58	0.29	0.00	0.00	0.00	0.00	
40	13.1	12.7	12.0	11.1	9.97	8.79	7.61	6.50	5.47	4.45	3.34	1.87	0.57	0.00	0.00	0.00	0.00	0.00	
45	10.5	10.2	9.85	9.27	8.52	7.66	6.76	5.86	4.99	4.05	2.96	1.74	0.57	0.00	0.00	0.00	0.00	0.00	
50	7.62	7.48	7.24	6.87	6.40	5.82	5.18	4.52	3.78	2.83	1.62	0.62	0.00	0.00	0.00	0.00	0.00	0.00	
55	6.20	6.03	5.89	5.64	5.30	4.85	4.29	3.63	2.89	2.12	1.23	0.50	0.05	0.00	0.00	0.00	0.00	0.00	
60	4.57	4.50	4.37	4.16	3.87	3.45	2.90	2.17	1.40	0.73	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	3.01	2.89	2.80	2.64	2.41	2.11	1.72	1.24	0.85	0.50	0.18	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	1.29	1.23	1.13	0.95	0.74	0.47	0.18	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.68	0.63	0.59	0.52	0.41	0.29	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: