

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		20717.4 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	15.6V x 14.2H
	At 50% of Imax	8.2V x 8.8H
	At 90% of Imax	2.9V x 5.4H
Beam Flux	Total	922.2 lumens per klm.
	To 10% of Imax	572.0 lumens per klm.
	To 50% of Imax	319.8 lumens per klm.
	To 90% of Imax	38.4 lumens per klm.
Upward LOR		0.0 %
Downward LOR		92.2 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.4V I:0.5956A P:119.8W PF:0.9087 Lamp Flux:13638.4x1 lm		
NAME: 8.03.006.0126 3° SP-F620A-108P-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700082
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

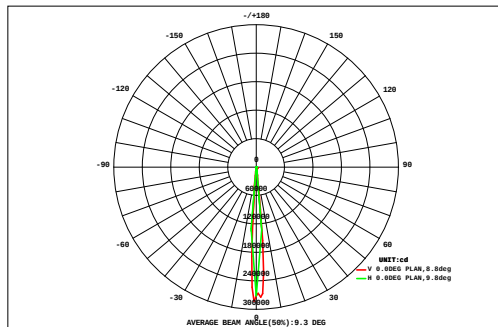

DATA OF LAMP		Eff:113.81lm/W	
MODELSP-F620A-108P-RDM-G		Imax(cd)	282551
NOMINAL POWER(W)	120	AVAILABILITY(%)	66.0
RATED VOLTAGE(V)	222	Avai. FLUX(lm)	8997
NOMINAL FLUX(lm)	13638.4	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	13638
TEST VOLTAGE(V)	221.4	θ @50%(H,V)	9,8DEG

		AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
		1.96	2.20	2.50	2.83	3.22	3.68	4.11	4.51	4.80	4.95	4.90	4.69	4.36	3.92	3.48	3.05	2.66	2.33	64.1	0.00		
VERTICAL (DEG)	9	2.09	2.35	2.68	3.04	3.47	3.98	4.45	4.88	5.19	5.33	5.25	4.99	4.61	4.11	3.63	3.16	2.74	2.40	68.4	0.00		
	8	2.22	2.51	2.86	3.26	3.73	4.28	4.78	5.25	5.57	5.71	5.60	5.29	4.87	4.31	3.78	3.28	2.83	2.46	72.6	0.00		
	7	2.35	2.66	3.05	3.47	3.98	4.58	5.12	5.62	5.95	6.08	5.95	5.60	5.12	4.51	3.93	3.39	2.91	2.53	76.8	0.00		
	6	1.73	2.00	2.33	2.28	5.82	6.63	14.2	27.4	41.6	50.0	47.7	45.8	48.4	50.2	44.9	32.9	20.1	10.9	455	434		
	5	1.72	2.00	2.35	2.24	6.36	7.25	16.1	31.6	48.4	58.3	55.6	53.4	56.5	58.6	52.4	38.4	23.2	12.5	527	505		
	4	1.72	2.01	2.37	2.20	6.90	7.86	18.0	35.9	55.2	66.6	63.5	60.9	64.6	67.1	60.0	43.9	26.4	14.1	599	576		
	3	1.71	2.01	2.39	2.16	7.44	8.48	20.0	40.1	62.0	74.9	71.4	68.5	72.7	75.6	67.6	49.3	29.6	15.6	671	647		
	2	1.71	2.02	2.41	2.12	7.99	9.10	21.9	44.4	68.8	83.2	79.3	76.1	80.7	84.0	75.1	54.8	32.8	17.2	744	727		
	1	2.98	2.68	9.49	10.9	25.4	51.3	78.7	94.0	87.9	83.2	88.6	92.4	81.8	58.1	33.1	16.2	7.28	5.82	830	811		
	0	3.20	2.80	10.8	12.4	29.0	59.4	90.6	107	96.9	89.9	96.7	102	88.6	60.3	31.6	13.6	5.24	5.04	904	888		
	-1	3.43	2.92	12.1	14.0	32.6	67.6	102	119	106	96.7	105	111	95.5	62.5	30.2	11.1	3.21	4.25	979	965		
	-2	3.66	3.05	13.4	15.6	36.2	75.8	114	132	115	103	113	120	102	64.7	28.7	8.52	1.18	3.47	1054	1034		
	-3	3.88	3.17	14.7	17.1	39.8	83.9	126	144	124	110	121	129	109	66.9	27.3	5.97	0.00	2.69	1129	1114		
	-4	1.48	1.76	1.45	1.25	3.40	1.79	6.71	18.3	32.8	41.5	38.6	36.2	39.7	43.7	40.7	30.6	18.7	9.87	368	351		
	-5	1.23	1.61	0.11	0.00	0.00	0.00	0.00	5.62	23.6	34.5	30.2	26.9	32.7	41.2	42.0	32.9	20.6	10.5	304	295		
	-6	0.98	1.45	0.00	0.00	0.00	0.00	0.00	0.00	14.4	27.5	21.8	17.5	25.7	38.8	43.3	35.3	22.5	11.2	260	258		
	-7	0.73	1.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.21	20.6	13.5	8.09	18.6	36.4	44.5	37.7	24.4	11.9	223	208	
	-8																						
	-9																						
		-9	-8	-7	-6	-5	-4	-3	-2	HORIZONTAL (DEG)				2	3	4	5	6	7	8	9		
Φ t		38.8	40.5	85.0	94.8	215	396	628	819	903	963	968	968	936	825	636	424	246	145	9330	---		
Φ a		0.00	0.00	60.5	70.0	163	347	603	793	877	941	946	939	917	808	622	397	218	114	---	8814		

one-half-peak spread: U:4.1,D:4.1 , L:2.6,R:3.2


NEMA Beam Type: Type 1

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.4V I:0.5956A P:119.8W PF:0.9087 Lamp Flux:13638.4x1 lm		
NAME: 8.03.006.0126 3° SP-F620A-108P-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700082
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

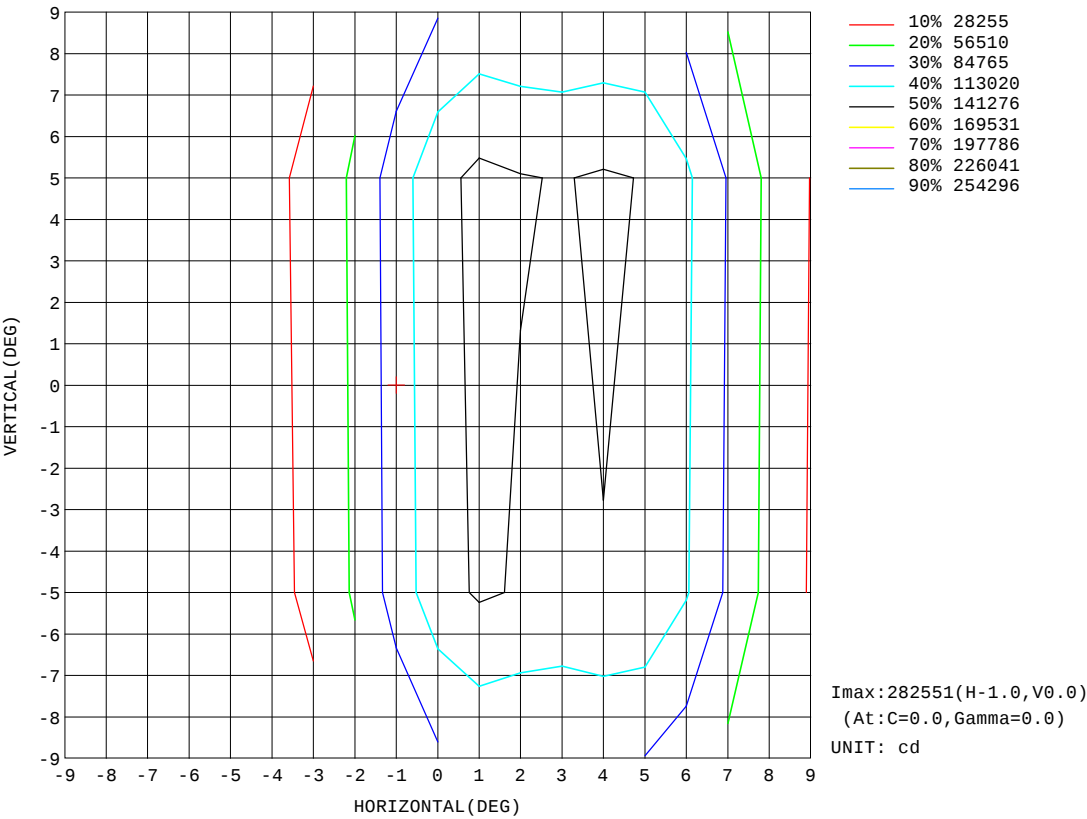


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:221.4V I:0.5956A P:119.8W PF:0.9087 Lamp Flux:13638.4x1 lm		
NAME: 8.03.006.0126 3° SP-F620A-108P-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700082
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

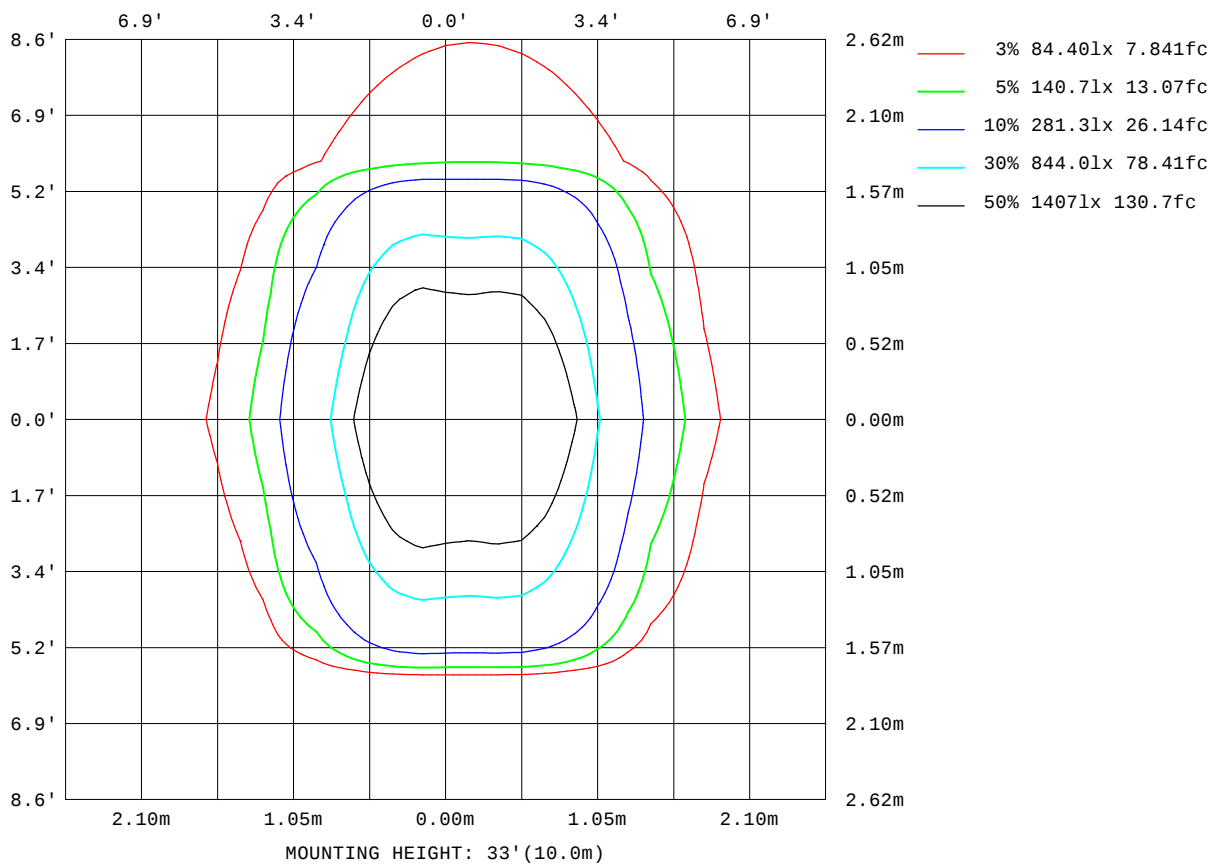


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:221.4V I:0.5956A P:119.8W PF:0.9087 Lamp Flux:13638.4x1 lm		
NAME: 8.03.006.0126 3° SP-F620A-108P-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700082
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

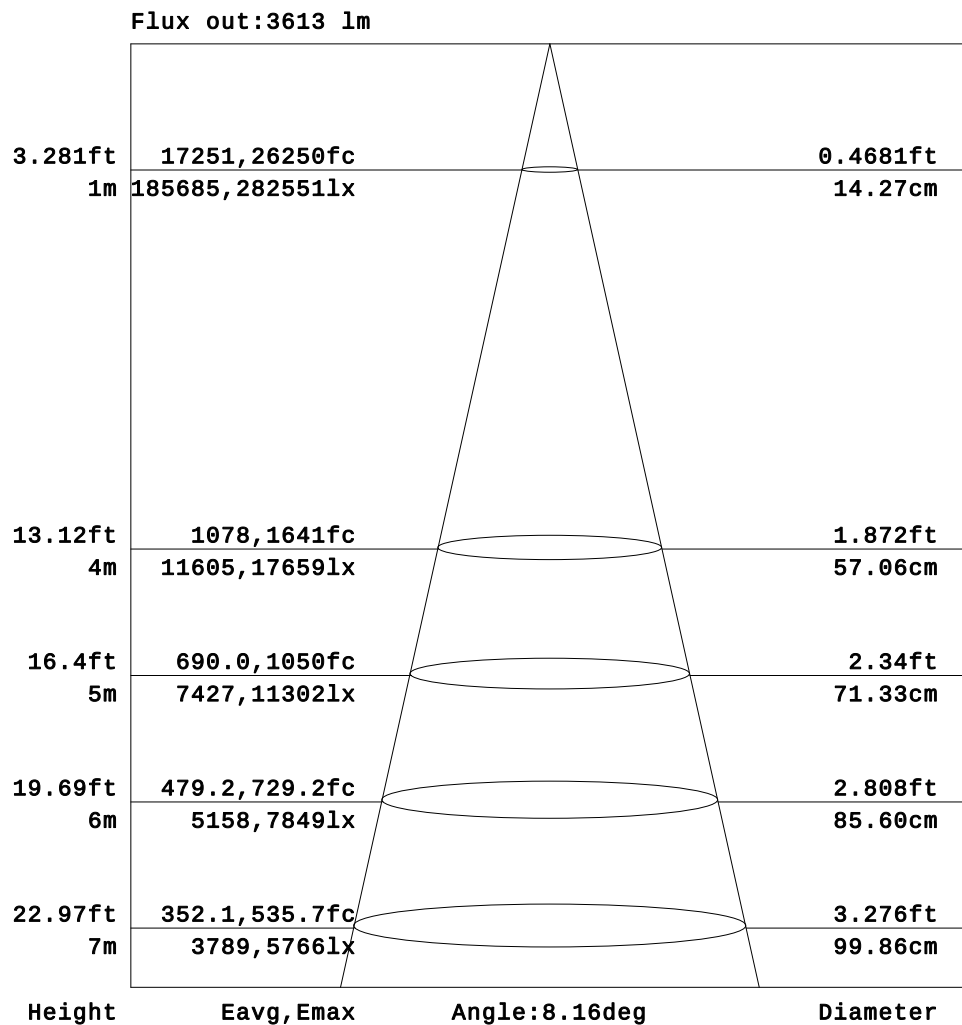


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

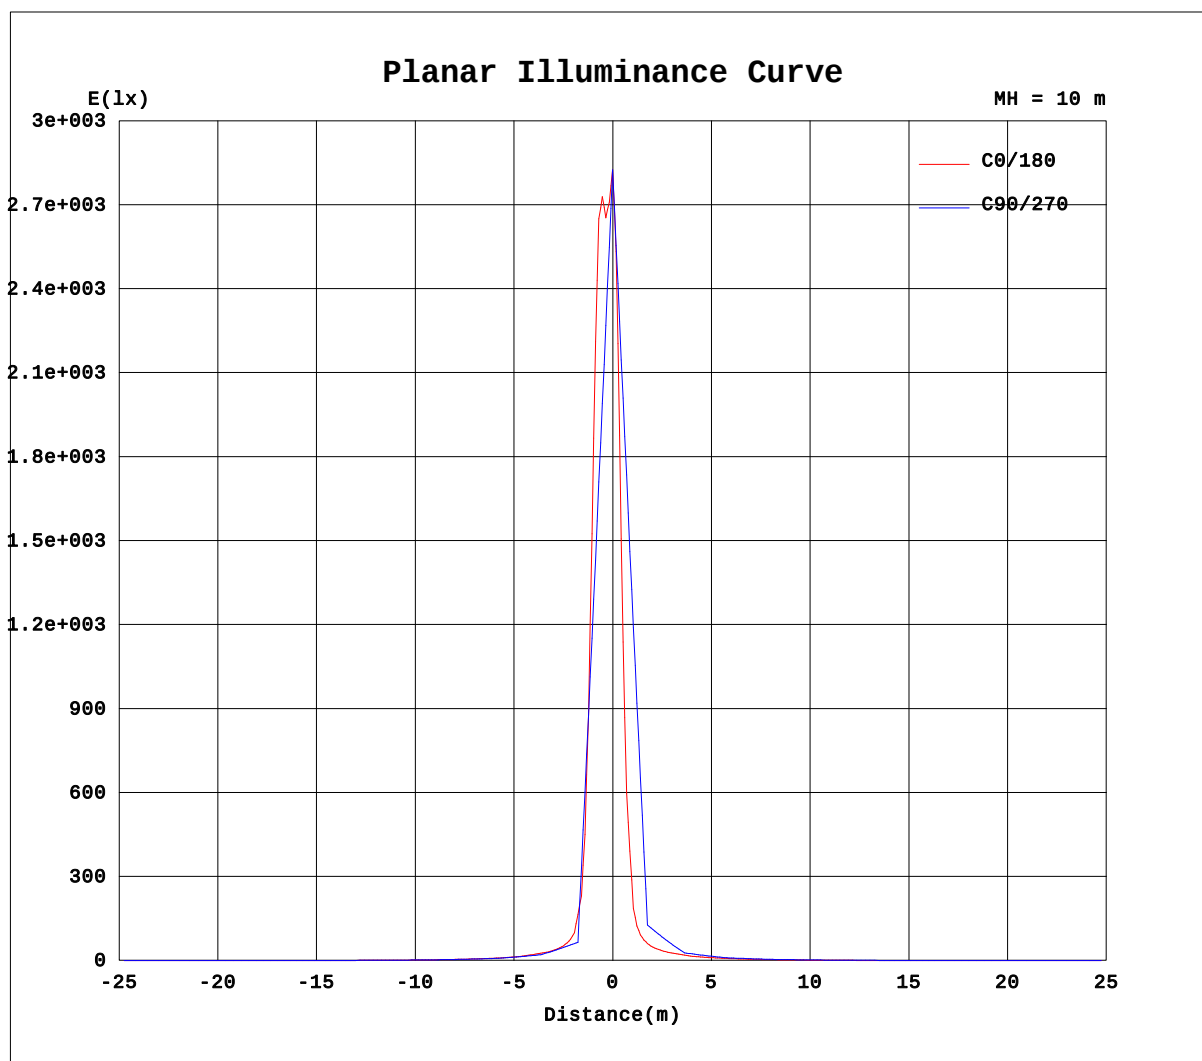

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 28.0DEG
Operators: QC1
Test Date: 2024-07-31

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 83%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.4V I:0.5956A P:119.8W PF:0.9087 Lamp Flux:13638.4x1 lm		
NAME: 8.03.006.0126 3° SP-F620A-108P-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700082
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1		UNIT: ×100cd																	
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.07	0.13	0.19	0.26	0.34	0.40	0.48	0.51
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.11	0.19	0.28	0.39	0.51	0.63	0.74	0.85	0.94	1.04	1.14
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.14	0.28	0.45	0.63	0.80	0.98	1.15	1.31	1.44	1.54	1.67	1.76
-65	0.00	0.00	0.00	0.00	0.00	0.03	0.14	0.33	0.55	0.78	1.03	1.29	1.57	1.85	2.09	2.29	2.45	2.57	2.70
-60	0.00	0.00	0.00	0.00	0.00	0.14	0.39	0.68	0.99	1.30	1.64	1.99	2.38	2.75	3.05	3.26	3.44	3.58	3.67
-55	0.00	0.00	0.00	0.00	0.02	0.20	0.52	0.88	1.28	1.71	2.20	2.60	2.98	3.36	3.69	3.96	4.19	4.37	4.54
-50	0.00	0.00	0.00	0.00	0.15	0.50	0.93	1.38	1.91	2.53	3.07	3.52	3.88	4.25	4.57	4.85	5.09	5.30	5.47
-45	0.00	0.00	0.00	0.00	0.15	0.55	1.02	1.57	2.20	2.80	3.39	3.91	4.40	4.91	5.40	5.87	6.27	6.59	6.86
-40	0.00	0.00	0.00	0.05	0.45	0.96	1.53	2.26	2.94	3.59	4.10	4.70	5.31	5.97	6.62	7.22	7.73	8.13	8.38
-35	0.00	0.00	0.00	0.02	0.39	0.93	1.57	2.35	3.08	3.74	4.36	5.07	5.90	6.81	7.78	8.76	9.67	10.4	10.9
-30	0.00	0.00	0.00	0.21	0.74	1.36	2.20	3.04	3.75	4.40	5.17	6.10	7.21	8.42	9.72	11.1	12.2	13.1	13.6
-25	0.00	0.00	0.00	0.11	0.61	1.25	2.10	2.98	3.72	4.47	5.34	6.43	7.78	9.40	11.3	13.4	15.6	17.9	19.5
-20	0.00	0.00	0.00	0.37	0.97	1.73	2.73	3.56	4.30	5.20	6.34	7.78	9.58	11.9	14.4	17.4	20.8	24.1	25.9
-15	0.00	0.00	0.00	0.21	0.78	1.51	2.53	3.38	4.19	5.10	6.27	7.80	9.79	12.4	15.8	20.9	27.6	36.7	46.1
-10	0.00	0.00	0.00	0.46	1.11	2.02	3.06	3.87	4.75	5.87	7.33	9.28	12.0	15.3	20.7	29.5	41.0	57.5	70.1
-5	0.00	0.00	0.00	0.26	0.88	1.70	2.77	3.63	4.48	5.52	6.91	8.78	11.3	14.7	20.0	29.4	45.6	120	1301
0	0.00	0.00	0.00	0.51	1.24	2.20	3.20	4.05	4.98	6.19	7.86	10.1	13.2	17.5	26.0	39.7	76.5	603	2711
5	0.00	0.00	0.00	0.27	0.90	1.74	2.82	3.67	4.52	5.57	6.99	8.92	11.6	15.0	20.7	30.9	48.6	130	1329
10	0.00	0.00	0.00	0.48	1.18	2.13	3.14	3.95	4.84	5.99	7.54	9.61	12.5	16.2	22.6	33.2	50.5	88.2	140
15	0.00	0.00	0.00	0.23	0.84	1.62	2.66	3.50	4.32	5.26	6.51	8.17	10.4	13.2	17.2	23.6	32.6	49.5	78.5
20	0.00	0.00	0.00	0.42	1.06	1.89	2.89	3.69	4.49	5.46	6.71	8.33	10.4	13.0	16.2	20.3	25.9	31.4	34.4
25	0.00	0.00	0.00	0.15	0.69	1.38	2.29	3.16	3.92	4.71	5.69	6.92	8.46	10.4	12.6	15.3	18.7	22.3	24.9
30	0.00	0.00	0.00	0.28	0.83	1.51	2.44	3.24	3.94	4.69	5.58	6.67	7.96	9.45	11.2	12.9	14.4	15.6	16.4
35	0.00	0.00	0.00	0.05	0.48	1.06	1.77	2.60	3.33	4.00	4.71	5.52	6.48	7.57	8.79	10.1	11.2	12.2	12.8
40	0.00	0.00	0.00	0.13	0.57	1.12	1.77	2.57	3.23	3.87	4.46	5.12	5.85	6.64	7.46	8.23	8.85	9.33	9.68
45	0.00	0.00	0.00	0.00	0.25	0.69	1.21	1.83	2.51	3.16	3.72	4.26	4.83	5.42	6.02	6.60	7.09	7.48	7.76
50	0.00	0.00	0.00	0.00	0.26	0.66	1.11	1.64	2.29	2.91	3.41	3.85	4.27	4.68	5.06	5.40	5.66	5.88	6.08
55	0.00	0.00	0.00	0.00	0.06	0.31	0.66	1.07	1.54	2.05	2.52	2.97	3.40	3.79	4.14	4.43	4.65	4.83	4.99
60	0.00	0.00	0.00	0.00	0.00	0.23	0.52	0.85	1.20	1.57	1.99	2.44	2.85	3.18	3.46	3.66	3.80	3.91	4.06
65	0.00	0.00	0.00	0.00	0.00	0.06	0.20	0.41	0.67	0.95	1.24	1.57	1.88	2.15	2.39	2.57	2.71	2.82	2.93
70	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.17	0.36	0.55	0.76	0.95	1.14	1.32	1.48	1.61	1.71	1.80	1.92
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.14	0.24	0.34	0.44	0.55	0.68	0.80	0.90	0.99	1.06	1.14
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.07	0.14	0.21	0.27	0.33	0.38	0.47
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.4V I:0.5956A P:119.8W PF:0.9087 Lamp Flux:13638.4x1 lm		
NAME: 8.03.006.0126 3° SP-F620A-108P-RDM-G	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700082
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: ×100cd		
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.45	0.43	0.39	0.34	0.29	0.24	0.19	0.14	0.10	0.07	0.04	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-75	1.08	1.05	1.01	0.94	0.86	0.76	0.67	0.57	0.46	0.36	0.27	0.18	0.08	0.02	0.00	0.00	0.00	0.00	
-70	1.69	1.64	1.58	1.48	1.35	1.21	1.06	0.91	0.75	0.59	0.42	0.26	0.11	0.00	0.00	0.00	0.00	0.00	
-65	2.66	2.61	2.55	2.45	2.30	2.10	1.85	1.59	1.31	1.05	0.81	0.58	0.35	0.13	0.00	0.00	0.00	0.00	
-60	3.59	3.54	3.46	3.32	3.10	2.79	2.44	2.05	1.67	1.32	1.01	0.71	0.40	0.13	0.00	0.00	0.00	0.00	
-55	4.50	4.42	4.31	4.14	3.91	3.61	3.25	2.87	2.47	2.04	1.57	1.15	0.77	0.41	0.10	0.00	0.00	0.00	
-50	5.35	5.23	5.05	4.80	4.48	4.14	3.76	3.40	2.94	2.38	1.77	1.27	0.84	0.41	0.07	0.00	0.00	0.00	
-45	6.84	6.68	6.42	6.05	5.59	5.09	4.57	4.07	3.59	3.07	2.48	1.85	1.25	0.75	0.30	0.01	0.00	0.00	
-40	8.22	7.95	7.53	6.95	6.29	5.63	4.97	4.37	3.84	3.29	2.69	1.91	1.25	0.72	0.23	0.00	0.00	0.00	
-35	10.9	10.5	9.89	9.02	8.04	7.04	6.12	5.25	4.52	3.89	3.27	2.56	1.75	1.08	0.53	0.07	0.00	0.00	
-30	13.3	12.7	11.6	10.3	8.97	7.69	6.56	5.52	4.69	3.99	3.31	2.58	1.68	1.00	0.43	0.00	0.00	0.00	
-25	19.5	18.0	15.9	13.7	11.6	9.68	8.03	6.63	5.48	4.58	3.83	3.10	2.27	1.38	0.74	0.19	0.00	0.00	
-20	24.8	21.7	18.3	15.3	12.7	10.3	8.34	6.73	5.50	4.55	3.76	3.02	2.10	1.21	0.58	0.06	0.00	0.00	
-15	46.6	37.4	27.9	21.3	16.1	12.7	10.1	7.99	6.37	5.17	4.25	3.45	2.65	1.61	0.87	0.28	0.00	0.00	
-10	62.1	44.9	32.0	22.6	16.5	12.8	9.98	7.83	6.20	5.01	4.08	3.27	2.37	1.37	0.67	0.12	0.00	0.00	
-5	1369	146	47.5	30.3	20.7	15.0	11.6	8.97	7.00	5.56	4.52	3.64	2.83	1.76	0.95	0.32	0.00	0.00	
0	1551	106	45.5	29.7	19.4	14.2	10.9	8.41	6.54	5.22	4.23	3.38	2.49	1.43	0.70	0.12	0.00	0.00	
5	1402	160	52.4	32.4	21.7	15.6	12.0	9.18	7.13	5.64	4.57	3.68	2.86	1.78	0.97	0.33	0.00	0.00	
10	113	62.7	38.5	26.2	18.0	13.7	10.5	8.17	6.41	5.13	4.18	3.33	2.44	1.41	0.69	0.13	0.00	0.00	
15	84.3	54.9	35.4	24.9	18.0	13.8	10.8	8.43	6.66	5.36	4.38	3.54	2.73	1.68	0.91	0.30	0.00	0.00	
20	33.0	28.4	22.5	17.6	14.1	11.3	8.95	7.17	5.78	4.74	3.90	3.13	2.19	1.26	0.60	0.09	0.00	0.00	
25	25.2	23.0	19.6	16.0	13.1	10.8	8.75	7.13	5.82	4.81	4.00	3.23	2.41	1.47	0.78	0.23	0.00	0.00	
30	16.0	15.1	13.7	12.0	10.2	8.58	7.18	5.96	4.99	4.20	3.48	2.74	1.81	1.07	0.49	0.04	0.00	0.00	
35	12.9	12.4	11.5	10.4	9.12	7.86	6.72	5.70	4.84	4.12	3.46	2.73	1.90	1.17	0.60	0.14	0.00	0.00	
40	9.48	9.12	8.57	7.84	7.02	6.20	5.41	4.71	4.09	3.50	2.88	2.08	1.34	0.79	0.31	0.00	0.00	0.00	
45	7.82	7.57	7.24	6.78	6.21	5.60	4.98	4.39	3.84	3.29	2.67	2.00	1.34	0.82	0.39	0.04	0.00	0.00	
50	5.96	5.80	5.58	5.28	4.91	4.50	4.07	3.64	3.16	2.61	1.93	1.37	0.90	0.49	0.14	0.00	0.00	0.00	
55	5.02	4.89	4.75	4.55	4.28	3.96	3.59	3.16	2.69	2.21	1.71	1.23	0.82	0.46	0.16	0.00	0.00	0.00	
60	3.97	3.89	3.79	3.63	3.41	3.13	2.77	2.32	1.84	1.43	1.08	0.75	0.45	0.17	0.00	0.00	0.00	0.00	
65	2.94	2.87	2.79	2.68	2.51	2.32	2.07	1.77	1.44	1.12	0.84	0.59	0.34	0.14	0.02	0.00	0.00	0.00	
70	1.84	1.79	1.72	1.61	1.47	1.31	1.14	0.96	0.77	0.58	0.40	0.22	0.07	0.00	0.00	0.00	0.00	0.00	
75	1.15	1.10	1.05	0.99	0.90	0.80	0.68	0.56	0.44	0.33	0.24	0.14	0.06	0.00	0.00	0.00	0.00	0.00	
80	0.40	0.37	0.34	0.30	0.25	0.19	0.13	0.07	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: