

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		21486.8 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	17.5V x 13.7H
	At 50% of Imax	9.7V x 8.5H
	At 90% of Imax	3.6V x 5.2H
Beam Flux	Total	920.0 lumens per klm.
	To 10% of Imax	564.3 lumens per klm.
	To 50% of Imax	319.8 lumens per klm.
	To 90% of Imax	33.2 lumens per klm.
Upward LOR		0.0 %
Downward LOR		92.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.7V I:0.4725A P:90.65W PF:0.8655 Lamp Flux:6459.13x1 lm		
NAME: 8.03.006.0126 3° SP-F620A-108P-RDM-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700081
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

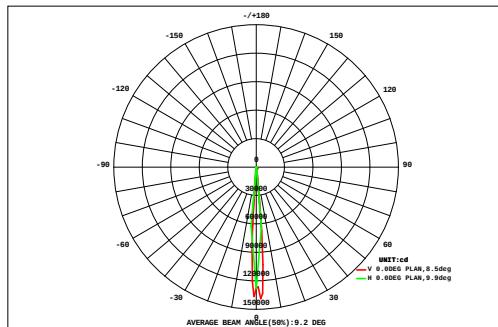

DATA OF LAMP		Eff:71.25lm/W	
MODELSP-F620A-108P-RDM-R	Imax(cd)	138786	
NOMINAL POWER(W)	90	AVAILABILITY(%)	65.7
RATED VOLTAGE(V)	222	Avai. FLUX(lm)	4246
NOMINAL FLUX(lm)	6459.13	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	6459
TEST VOLTAGE(V)	221.7	θ @50%(H,V)	8,10DEG

		AREA FLUX DIAGRAM																UNIT:lm			Φ t	Φ a
VERTICAL (DEG)	9	0.98	1.08	1.21	1.35	1.51	1.74	1.97	2.21	2.38	2.45	2.41	2.28	2.07	1.82	1.60	1.42	1.22	1.09	30.8	0.00	
	8	1.04	1.16	1.29	1.45	1.63	1.88	2.14	2.39	2.58	2.64	2.59	2.43	2.19	1.91	1.66	1.48	1.26	1.12	32.8	0.00	
	7	1.11	1.23	1.38	1.55	1.75	2.02	2.30	2.58	2.78	2.83	2.76	2.58	2.31	1.99	1.73	1.53	1.30	1.15	34.9	0.00	
	6	1.18	1.31	1.47	1.65	1.87	2.16	2.47	2.77	2.98	3.02	2.93	2.73	2.42	2.08	1.79	1.59	1.34	1.18	36.9	0.00	
	5	0.92	1.03	1.16	1.29	1.53	2.80	6.61	12.7	19.7	24.4	22.5	21.1	24.7	25.7	21.1	14.4	8.67	4.36	215	206	
	4	0.93	1.04	1.17	1.31	1.57	3.04	7.50	14.7	22.9	28.5	26.2	24.5	28.8	30.1	24.7	16.8	10.0	4.97	249	240	
	3	0.94	1.05	1.19	1.33	1.60	3.27	8.39	16.6	26.1	32.5	29.9	28.0	32.9	34.5	28.2	19.2	11.4	5.57	283	273	
	2	0.94	1.06	1.20	1.34	1.63	3.50	9.28	18.6	29.3	36.6	33.6	31.4	37.1	38.8	31.8	21.6	12.8	6.18	317	307	
	1	0.95	1.07	1.22	1.36	1.67	3.73	10.2	20.6	32.5	40.6	37.3	34.9	41.2	43.2	35.4	24.0	14.1	6.78	351	341	
	0	1.46	1.64	2.02	4.45	11.9	23.8	37.3	46.0	41.3	37.9	45.3	47.7	38.3	25.0	14.1	6.17	4.54	2.04	391	384	
	-1	1.56	1.76	2.18	5.03	13.8	27.7	42.9	52.2	45.5	40.8	49.8	52.8	41.2	25.3	13.1	4.88	3.91	1.67	426	415	
	-2	1.66	1.87	2.33	5.61	15.7	31.5	48.6	58.5	49.8	43.6	54.3	58.0	44.0	25.6	12.1	3.60	3.28	1.31	461	447	
	-3	1.76	1.98	2.49	6.18	17.6	35.4	54.2	64.7	54.0	46.4	58.8	63.2	46.9	25.9	11.2	2.31	2.66	0.94	497	484	
	-4	1.86	2.10	2.65	6.76	19.5	39.2	59.9	70.9	58.2	49.2	63.3	68.3	49.7	26.2	10.2	1.02	2.03	0.57	532	521	
	-5	0.77	0.85	0.94	0.83	0.37	0.53	3.05	8.25	15.5	20.4	17.8	16.1	20.5	22.8	19.3	13.5	7.94	3.94	173	162	
	-6	0.66	0.72	0.76	0.23	0.00	0.00	0.00	1.95	11.2	17.5	13.2	10.8	17.5	22.4	20.1	14.7	8.50	4.25	144	140	
	-7	0.54	0.59	0.57	0.00	0.00	0.00	0.00	0.00	6.91	14.6	8.55	5.53	14.6	22.0	21.0	15.9	9.06	4.57	124	123	
	-8	0.42	0.45	0.39	0.00	0.00	0.00	0.00	0.00	2.60	11.7	3.94	0.26	11.6	21.6	21.8	17.1	9.62	4.88	106	98.3	
	-9	-9	-8	-7	-6	-5	-4	-3	-2	HORIZONTAL (DEG)				2	3	4	5	6	7	8	9	
Φ t	19.7	22.0	25.6	41.7	93.6	182	297	396	426	456	475	473	458	397	291	181	114	56.6	4404	---		
Φ a	0.00	0.00	0.00	28.0	78.5	158	285	384	413	445	461	462	449	389	284	168	96.7	41.6	---	4142		

one-half-peak spread: U:4.8,D:4.9 , L:2.5,R:3.0


NEMA Beam Type: Type 1

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.7V I:0.4725A P:90.65W PF:0.8655 Lamp Flux:6459.13x1 lm		
NAME: 8.03.006.0126 3° SP-F620A-108P-RDM-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700081
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

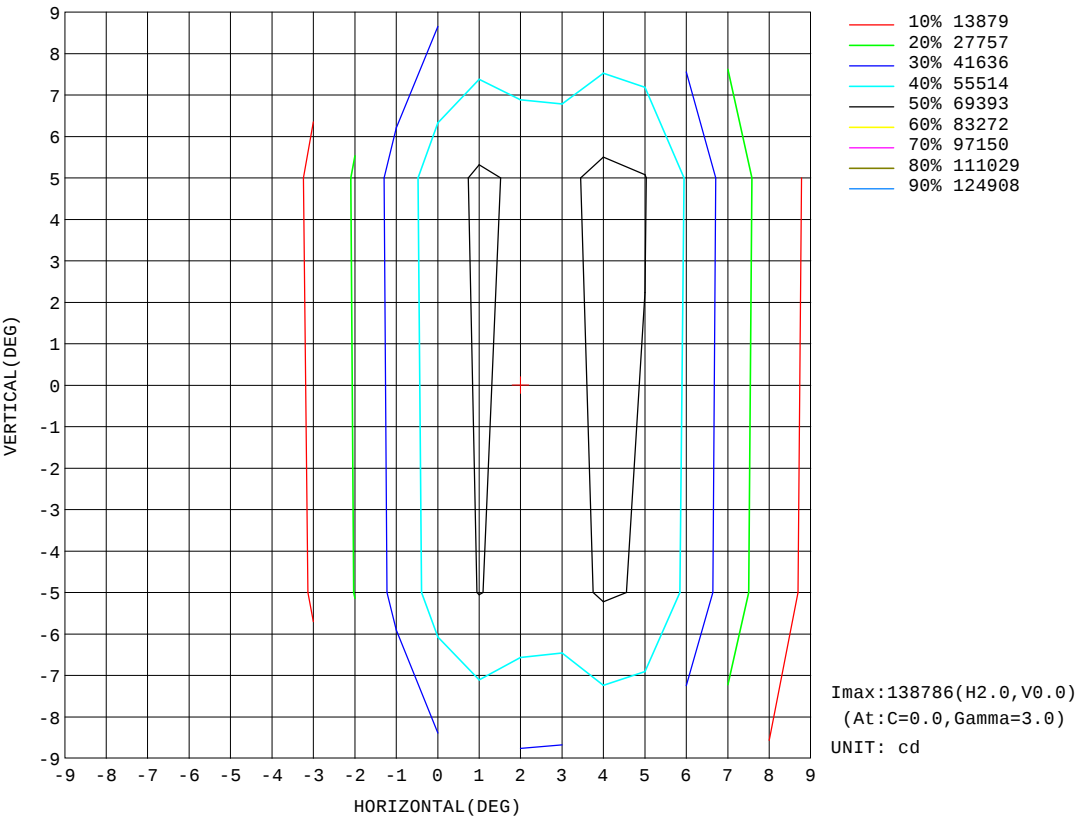


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:221.7V I:0.4725A P:90.65W PF:0.8655 Lamp Flux:6459.13x1 lm		
NAME: 8.03.006.0126 3° SP-F620A-108P-RDM-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700081
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

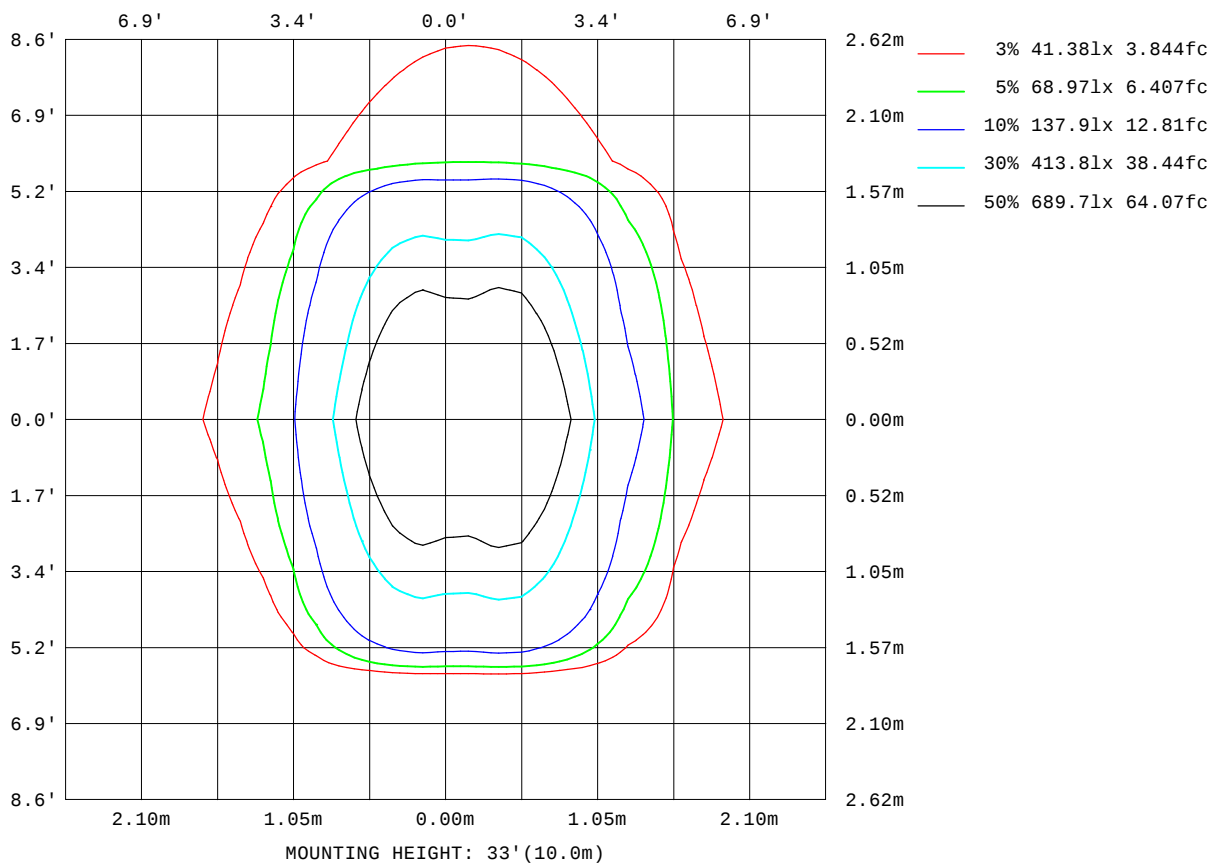


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:221.7V I:0.4725A P:90.65W PF:0.8655 Lamp Flux:6459.13x1 lm		
NAME: 8.03.006.0126 3° SP-F620A-108P-RDM-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700081
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

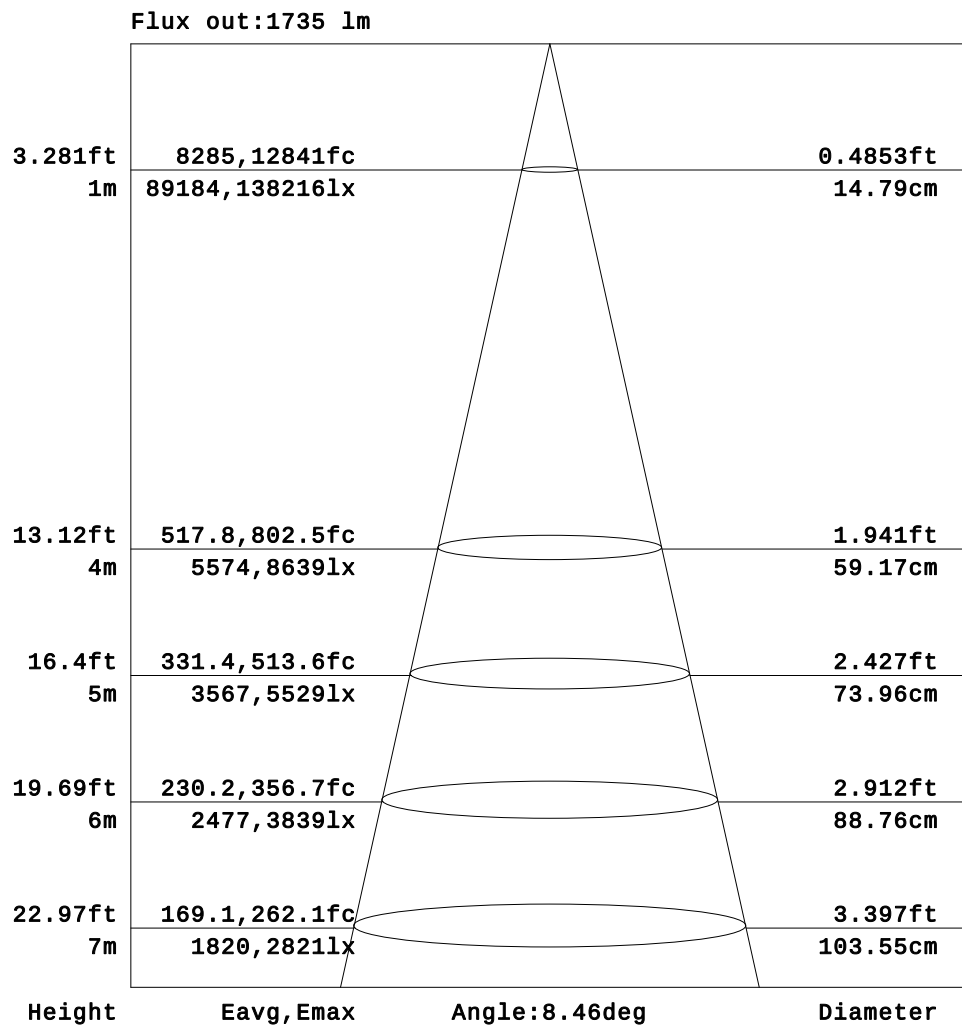


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

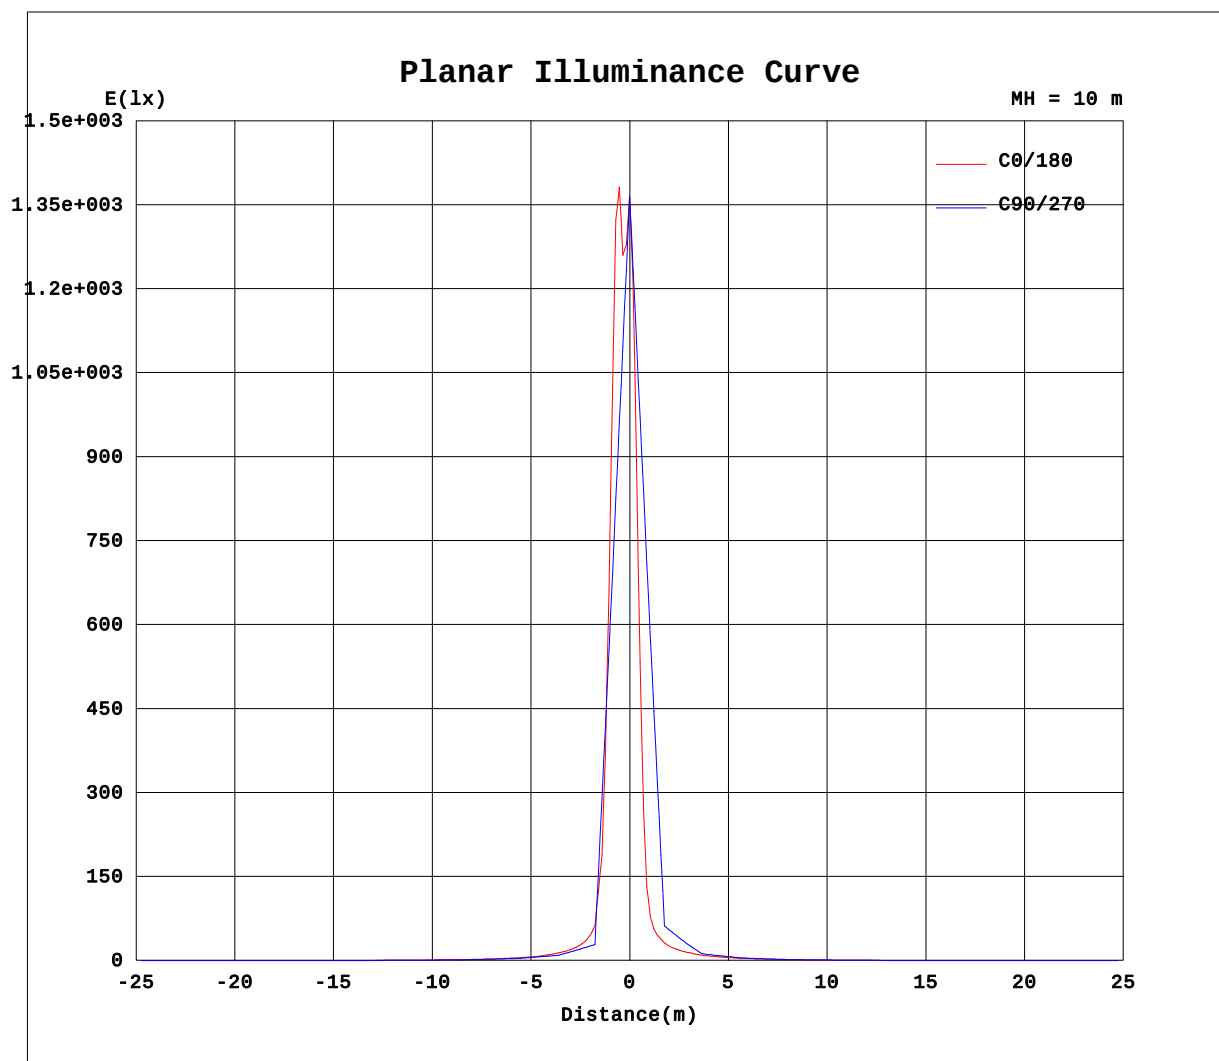

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 28.0DEG
Operators: QC1
Test Date: 2024-07-31

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 83%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.7V I:0.4725A P:90.65W PF:0.8655 Lamp Flux:6459.13x1 lm		
NAME: 8.03.006.0126 3° SP-F620A-108P-RDM-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700081
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: ×100cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.06	0.09	0.12	0.15
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.09	0.13	0.17	0.21	0.26	0.31	0.35	0.39	0.45
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.12	0.21	0.29	0.38	0.46	0.53	0.59	0.64	0.69	0.74
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.09	0.17	0.28	0.41	0.53	0.67	0.80	0.91	0.99	1.05	1.10	1.16
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.23	0.39	0.54	0.71	0.89	1.07	1.23	1.35	1.43	1.49	1.54	1.60
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.15	0.33	0.53	0.75	0.99	1.17	1.35	1.52	1.65	1.75	1.84	1.90	1.98
-50	0.00	0.00	0.00	0.00	0.00	0.15	0.36	0.59	0.85	1.16	1.41	1.61	1.77	1.92	2.04	2.14	2.23	2.31	2.39
-45	0.00	0.00	0.00	0.00	0.01	0.17	0.41	0.69	1.01	1.31	1.58	1.81	2.03	2.24	2.44	2.62	2.80	2.92	3.03
-40	0.00	0.00	0.00	0.00	0.12	0.38	0.67	1.06	1.40	1.69	1.94	2.20	2.46	2.73	3.00	3.24	3.47	3.61	3.73
-35	0.00	0.00	0.00	0.00	0.09	0.36	0.69	1.10	1.48	1.80	2.10	2.44	2.80	3.20	3.62	4.04	4.43	4.71	4.90
-30	0.00	0.00	0.00	0.00	0.26	0.58	1.02	1.45	1.82	2.15	2.53	2.96	3.46	4.00	4.58	5.15	5.64	5.97	6.16
-25	0.00	0.00	0.00	0.00	0.20	0.52	0.97	1.44	1.81	2.19	2.63	3.18	3.81	4.55	5.43	6.35	7.27	8.15	8.81
-20	0.00	0.00	0.00	0.08	0.38	0.78	1.31	1.72	2.10	2.57	3.15	3.89	4.73	5.79	6.99	8.30	9.64	10.9	11.7
-15	0.00	0.00	0.00	0.01	0.28	0.66	1.21	1.65	2.06	2.55	3.17	3.95	4.92	6.16	7.79	10.1	13.1	16.8	20.5
-10	0.00	0.00	0.00	0.13	0.46	0.94	1.48	1.92	2.38	2.98	3.76	4.74	6.06	7.74	10.2	14.3	19.3	25.9	30.9
-5	0.00	0.00	0.00	0.03	0.34	0.76	1.34	1.78	2.23	2.79	3.56	4.51	5.81	7.53	10.1	14.9	23.1	31.2	38.9
0	0.00	0.00	0.00	0.15	0.52	1.04	1.56	1.99	2.48	3.14	4.06	5.22	6.83	9.10	13.3	20.7	33.8	51.2	77.9
5	0.00	0.00	0.00	0.03	0.35	0.78	1.36	1.80	2.25	2.82	3.60	4.60	5.96	7.76	10.6	16.0	25.3	39.6	63.4
10	0.00	0.00	0.00	0.14	0.49	0.99	1.52	1.95	2.43	3.05	3.88	4.95	6.42	8.34	11.5	17.1	26.6	42.0	69.0
15	0.00	0.00	0.00	0.01	0.31	0.71	1.28	1.71	2.13	2.63	3.30	4.17	5.27	6.71	8.65	11.8	16.4	23.8	37.3
20	0.00	0.00	0.00	0.10	0.43	0.86	1.40	1.79	2.20	2.71	3.38	4.20	5.20	6.49	7.98	9.85	12.3	14.4	15.5
25	0.00	0.00	0.00	0.00	0.24	0.59	1.07	1.52	1.91	2.31	2.81	3.45	4.19	5.11	6.17	7.42	8.87	10.3	11.2
30	0.00	0.00	0.00	0.03	0.31	0.66	1.14	1.55	1.92	2.29	2.73	3.26	3.87	4.55	5.32	6.09	6.69	7.12	7.36
35	0.00	0.00	0.00	0.00	0.13	0.42	0.79	1.22	1.60	1.92	2.27	2.66	3.10	3.59	4.14	4.71	5.18	5.53	5.77
40	0.00	0.00	0.00	0.00	0.18	0.45	0.78	1.20	1.53	1.82	2.10	2.39	2.72	3.06	3.43	3.74	3.97	4.13	4.26
45	0.00	0.00	0.00	0.00	0.04	0.24	0.50	0.82	1.16	1.47	1.73	1.98	2.22	2.47	2.73	2.97	3.16	3.29	3.42
50	0.00	0.00	0.00	0.00	0.02	0.22	0.45	0.71	1.03	1.33	1.56	1.75	1.93	2.09	2.24	2.36	2.46	2.53	2.60
55	0.00	0.00	0.00	0.00	0.00	0.07	0.22	0.42	0.66	0.91	1.13	1.34	1.53	1.69	1.82	1.93	2.01	2.08	2.16
60	0.00	0.00	0.00	0.00	0.00	0.01	0.15	0.31	0.48	0.67	0.87	1.08	1.26	1.40	1.50	1.57	1.62	1.67	1.71
65	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.12	0.22	0.36	0.50	0.66	0.80	0.92	1.02	1.09	1.14	1.19	1.25
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.16	0.27	0.35	0.44	0.53	0.60	0.66	0.70	0.74	0.78
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.06	0.11	0.16	0.20	0.25	0.29	0.32	0.36	0.39	0.45
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.7V I:0.4725A P:90.65W PF:0.8655 Lamp Flux:6459.13x1 lm		
NAME: 8.03.006.0126 3° SP-F620A-108P-RDM-R	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700081
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: ×100cd		
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.11	0.10	0.08	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.42	0.40	0.38	0.35	0.31	0.26	0.22	0.18	0.14	0.10	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.70	0.68	0.65	0.60	0.55	0.48	0.41	0.33	0.25	0.17	0.09	0.01	0.00	0.00	0.00	0.00	0.00	0.00	
-65	1.15	1.12	1.10	1.06	0.99	0.91	0.80	0.68	0.54	0.41	0.29	0.18	0.08	0.00	0.00	0.00	0.00	0.00	
-60	1.56	1.55	1.51	1.46	1.38	1.25	1.09	0.90	0.72	0.55	0.40	0.25	0.09	0.00	0.00	0.00	0.00	0.00	
-55	1.97	1.94	1.90	1.84	1.75	1.63	1.48	1.31	1.13	0.92	0.68	0.47	0.28	0.10	0.00	0.00	0.00	0.00	
-50	2.35	2.30	2.24	2.15	2.03	1.89	1.73	1.57	1.37	1.10	0.79	0.53	0.31	0.10	0.00	0.00	0.00	0.00	
-45	3.04	2.97	2.88	2.74	2.56	2.35	2.14	1.91	1.70	1.44	1.15	0.82	0.52	0.27	0.05	0.00	0.00	0.00	
-40	3.67	3.58	3.42	3.20	2.93	2.65	2.35	2.08	1.83	1.55	1.25	0.85	0.52	0.25	0.01	0.00	0.00	0.00	
-35	4.92	4.79	4.56	4.21	3.79	3.35	2.94	2.52	2.17	1.86	1.55	1.20	0.79	0.44	0.16	0.00	0.00	0.00	
-30	6.08	5.86	5.45	4.89	4.30	3.72	3.16	2.66	2.26	1.92	1.59	1.23	0.75	0.40	0.11	0.00	0.00	0.00	
-25	8.89	8.33	7.49	6.56	5.62	4.73	3.95	3.27	2.69	2.23	1.86	1.49	1.06	0.59	0.26	0.01	0.00	0.00	
-20	11.3	10.2	8.80	7.46	6.23	5.08	4.16	3.37	2.73	2.24	1.84	1.44	0.96	0.50	0.18	0.00	0.00	0.00	
-15	20.9	17.4	13.6	10.5	8.02	6.34	5.06	4.03	3.20	2.55	2.08	1.66	1.26	0.71	0.33	0.03	0.00	0.00	
-10	28.1	21.4	15.9	11.3	8.37	6.52	5.07	3.98	3.08	2.46	1.98	1.57	1.11	0.58	0.22	0.00	0.00	0.00	
-5	681	76.6	24.5	15.5	10.4	7.68	5.92	4.58	3.55	2.77	2.22	1.77	1.35	0.78	0.37	0.05	0.00	0.00	
0	675	51.4	24.3	15.1	9.89	7.31	5.59	4.30	3.31	2.60	2.08	1.63	1.17	0.61	0.24	0.00	0.00	0.00	
5	699	82.9	26.7	16.6	10.9	7.93	6.08	4.67	3.60	2.80	2.24	1.78	1.36	0.79	0.37	0.06	0.00	0.00	
10	52.8	29.6	19.0	13.0	9.07	6.90	5.33	4.14	3.19	2.52	2.02	1.59	1.14	0.60	0.24	0.00	0.00	0.00	
15	40.0	25.3	16.9	12.2	8.87	6.85	5.37	4.23	3.32	2.62	2.13	1.70	1.29	0.73	0.34	0.04	0.00	0.00	
20	14.9	13.0	10.5	8.45	6.83	5.51	4.42	3.54	2.83	2.30	1.88	1.48	1.00	0.52	0.19	0.00	0.00	0.00	
25	11.3	10.5	9.03	7.56	6.28	5.19	4.26	3.47	2.82	2.31	1.91	1.54	1.12	0.62	0.28	0.01	0.00	0.00	
30	7.24	6.88	6.32	5.62	4.81	4.08	3.45	2.84	2.37	1.98	1.64	1.29	0.80	0.42	0.13	0.00	0.00	0.00	
35	5.79	5.58	5.25	4.80	4.25	3.68	3.17	2.69	2.28	1.94	1.62	1.28	0.85	0.47	0.19	0.00	0.00	0.00	
40	4.20	4.06	3.84	3.55	3.22	2.86	2.52	2.20	1.92	1.63	1.33	0.94	0.56	0.28	0.05	0.00	0.00	0.00	
45	3.42	3.32	3.20	3.02	2.79	2.54	2.28	2.02	1.78	1.53	1.23	0.89	0.56	0.30	0.08	0.00	0.00	0.00	
50	2.57	2.50	2.42	2.31	2.18	2.02	1.83	1.64	1.45	1.19	0.86	0.57	0.34	0.13	0.00	0.00	0.00	0.00	
55	2.16	2.10	2.05	1.98	1.88	1.75	1.59	1.41	1.20	0.98	0.74	0.50	0.30	0.12	0.01	0.00	0.00	0.00	
60	1.70	1.67	1.63	1.57	1.48	1.37	1.22	1.02	0.79	0.60	0.43	0.26	0.11	0.00	0.00	0.00	0.00	0.00	
65	1.25	1.21	1.18	1.14	1.07	0.99	0.88	0.75	0.59	0.44	0.31	0.18	0.09	0.01	0.00	0.00	0.00	0.00	
70	0.76	0.74	0.71	0.67	0.60	0.53	0.45	0.36	0.27	0.18	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.44	0.41	0.39	0.37	0.32	0.28	0.24	0.20	0.15	0.11	0.06	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.08	0.07	0.05	0.05	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: