

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		23930.2 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	17.7V x 12.6H
	At 50% of Imax	10.2V x 7.9H
	At 90% of Imax	3.8V x 4.0H
Beam Flux	Total	940.1 lumens per klm.
	To 10% of Imax	576.1 lumens per klm.
	To 50% of Imax	310.0 lumens per klm.
	To 90% of Imax	27.9 lumens per klm.
Upward LOR		0.0 %
Downward LOR		94.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.1V I:0.6058A P:122.0W PF:0.9112 Lamp Flux:15722.1x1 lm		
NAME: 8.03.006.0126 3° SP-F620A-108P-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700084
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

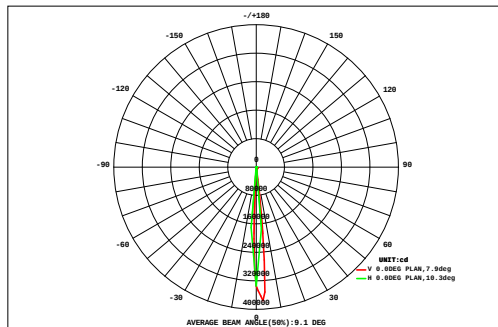

DATA OF LAMP		Eff:128.82lm/W	
MODELSP-F620A-108P-RDM-W	Imax(cd)	376234	
NOMINAL POWER(W)	122	AVAILABILITY(%)	64.5
RATED VOLTAGE(V)	222	Avai. FLUX(lm)	10145
NOMINAL FLUX(lm)	15722.1	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	15722
TEST VOLTAGE(V)	221.1	θ @50%(H,V)	8,10DEG

		AREA FLUX DIAGRAM																UNIT:lm			Φ t	Φ a
VERTICAL (DEG)	9	2.06	2.29	2.56	2.88	3.25	3.66	4.12	4.55	4.94	5.24	5.41	5.40	5.18	4.83	4.38	3.93	3.49	3.08	71.2	0.00	
	8	2.16	2.41	2.70	3.04	3.44	3.88	4.37	4.84	5.26	5.59	5.77	5.76	5.52	5.14	4.66	4.17	3.69	3.26	75.7	0.00	
	7	2.26	2.52	2.83	3.20	3.62	4.10	4.63	5.13	5.59	5.94	6.14	6.12	5.87	5.46	4.94	4.41	3.90	3.43	80.1	0.00	
	6	2.36	2.63	2.96	3.36	3.81	4.32	4.89	5.42	5.91	6.29	6.50	6.49	6.21	5.77	5.22	4.66	4.11	3.61	84.5	0.00	
	5	2.37	2.73	3.13	2.02	9.26	12.7	28.4	45.7	56.8	59.2	61.6	67.2	68.5	53.5	37.6	17.1	8.44	5.09	542	508	
	4	2.45	2.84	3.27	1.91	10.4	14.4	32.9	53.3	66.4	69.1	72.0	78.5	80.1	62.5	43.7	19.6	9.40	5.50	628	592	
	3	2.54	2.95	3.41	1.79	11.6	16.1	37.4	60.8	75.9	79.0	82.3	89.9	91.7	71.4	49.9	22.1	10.4	5.92	715	688	
	2	2.62	3.06	3.56	1.68	12.7	17.8	41.9	68.4	85.4	88.9	92.6	101	103	80.4	56.0	24.6	11.3	6.33	802	773	
	1	2.70	3.17	3.70	1.57	13.8	19.5	46.4	75.9	94.9	98.8	103	113	115	89.3	62.1	27.0	12.3	6.74	888	870	
	0	2.79	3.28	3.84	1.45	15.0	21.2	50.9	83.5	104	109	113	124	127	98.3	68.2	29.5	13.2	7.15	975	957	
	-1	2.87	3.39	3.98	1.34	16.1	22.9	55.4	91.1	114	119	124	135	138	107	74.3	32.0	14.2	7.57	1062	1043	
	-2	2.95	3.50	4.12	1.22	17.3	24.6	59.9	98.6	123	129	134	147	150	116	80.5	34.4	15.1	7.98	1148	1129	
	-3	3.03	3.61	4.26	1.11	18.4	26.3	64.3	106	133	138	144	158	161	125	86.6	36.9	16.1	8.39	1235	1215	
	-4	3.12	3.72	4.40	1.00	19.6	28.0	68.8	114	143	148	155	169	173	134	92.7	39.4	17.1	8.80	1322	1301	
	-5	2.05	2.32	2.63	1.68	7.56	10.3	23.1	37.1	46.2	48.0	50.0	54.5	55.6	43.5	30.6	13.9	6.85	4.17	440	403	
	-6	1.92	2.16	2.43	1.71	6.31	8.47	18.4	29.4	36.4	37.9	39.4	43.0	43.8	34.3	24.3	11.3	5.78	3.67	351	307	
	-7	1.79	1.99	2.22	1.75	5.06	6.64	13.8	21.6	26.7	27.8	28.9	31.4	32.0	25.2	18.0	8.67	4.70	3.16	261	225	
	-8	1.67	1.83	2.01	1.78	3.81	4.81	9.15	13.9	17.0	17.6	18.3	19.8	20.1	16.1	11.7	6.06	3.63	2.66	172	135	
	-9	-9	-8	-7	-6	-5	-4	-3	-2	HORIZONTAL (DEG)					2	3	4	5	6	7	8	9
Φ t	43.7	50.4	58.0	34.5	181	250	569	919	1145	1192	1241	1354	1381	1078	755	340	164	96.5	10853	---		
Φ a	0.00	0.00	0.00	0.00	124	204	542	899	1123	1169	1217	1331	1359	1057	736	296	87.9	0.00	---	10145		

one-half-peak spread: U:5.1,D:5.2 , L:5.1,R:2.8


NEMA Beam Type: Type 1

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:221.1V I:0.6058A P:122.0W PF:0.9112 Lamp Flux:15722.1x1 lm		
NAME: 8.03.006.0126 3° SP-F620A-108P-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700084
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

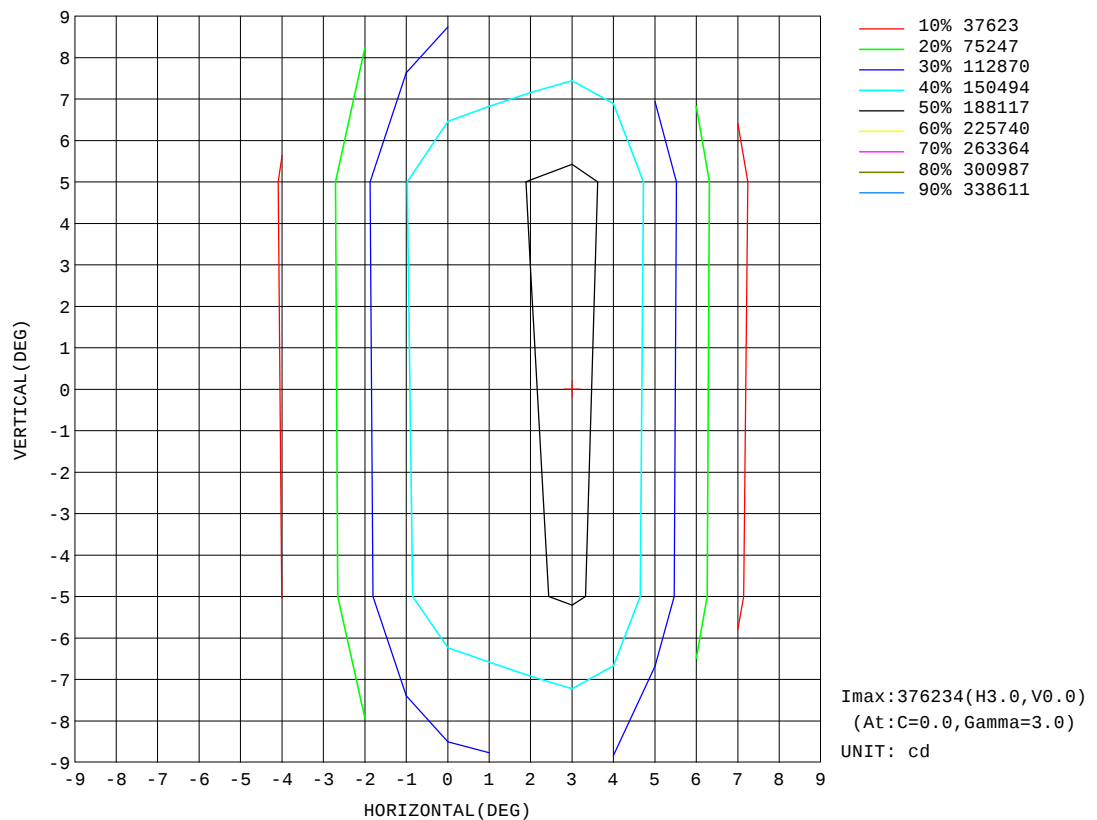


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:221.1V I:0.6058A P:122.0W PF:0.9112 Lamp Flux:15722.1x1 lm		
NAME: 8.03.006.0126 3° SP-F620A-108P-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700084
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

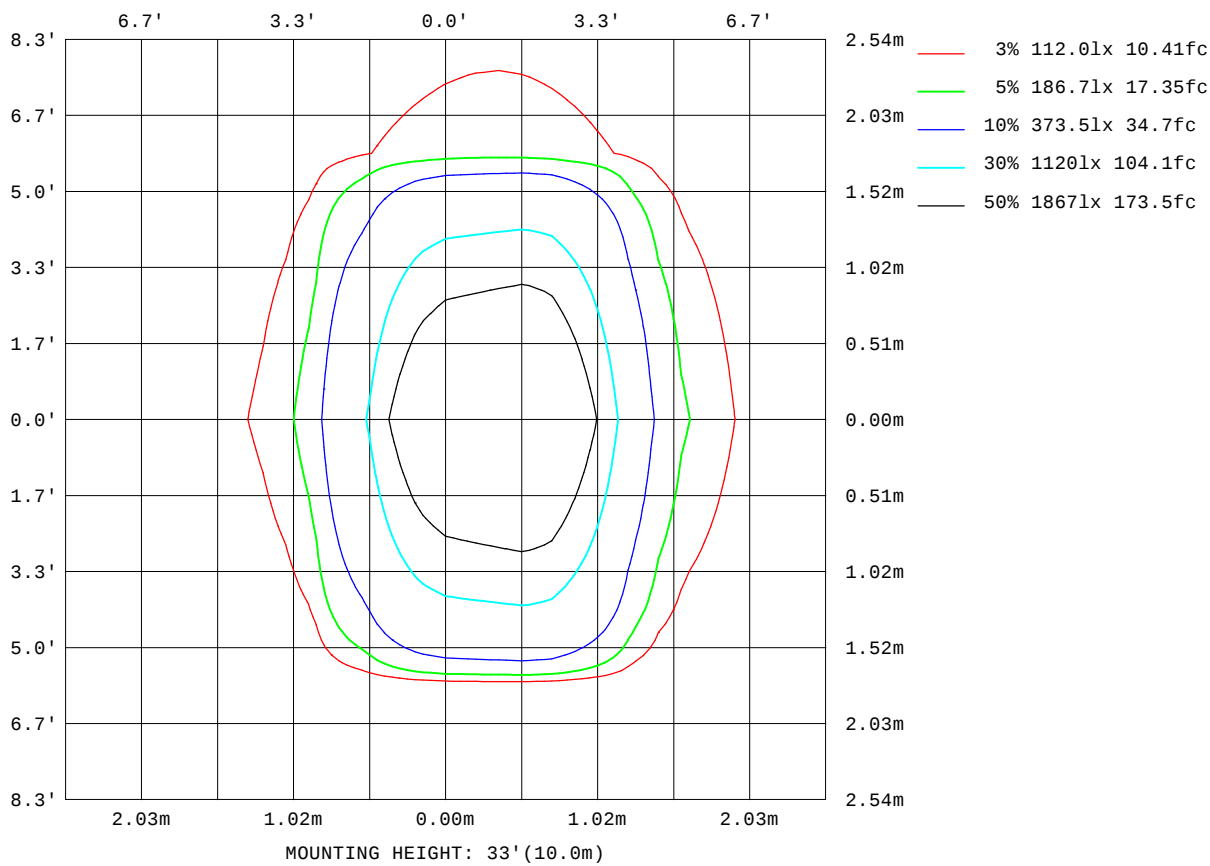


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:221.1V I:0.6058A P:122.0W PF:0.9112 Lamp Flux:15722.1x1 lm		
NAME: 8.03.006.0126 3° SP-F620A-108P-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700084
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

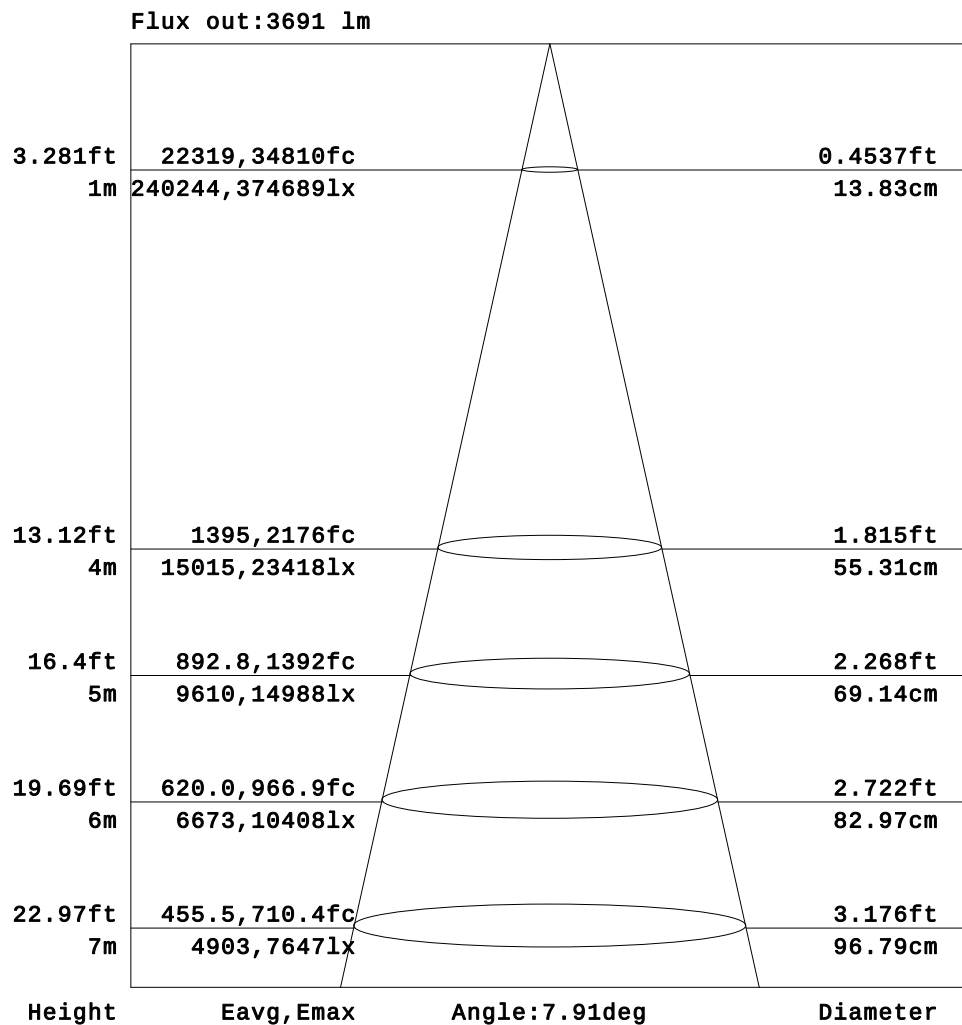


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

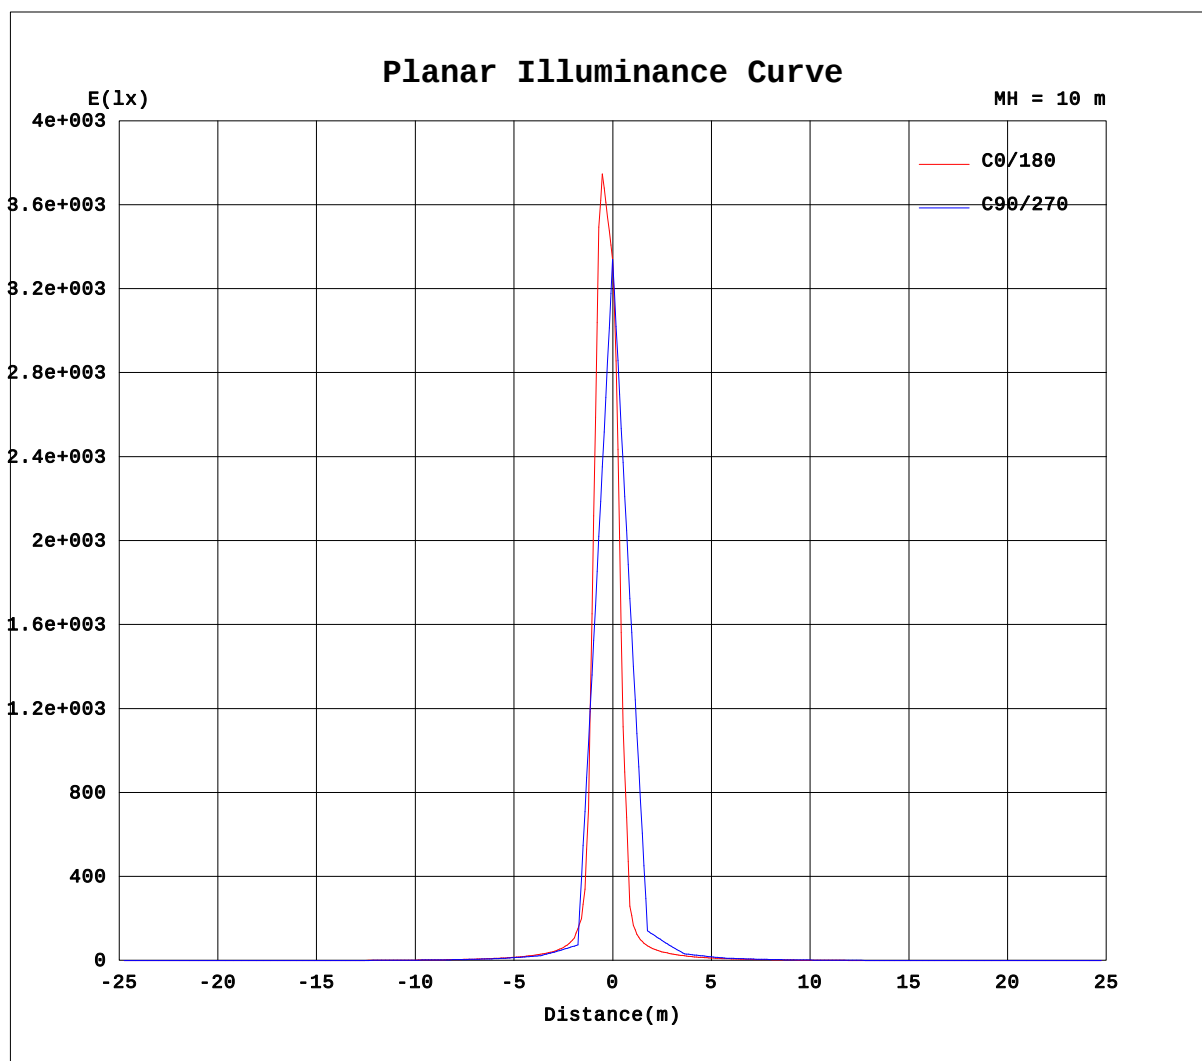

H(β) Range: -90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature: 28.0DEG
Operators: QC1
Test Date: 2024-07-31

V(B) Range: -80 - 80DEG
V(B) Interval: 5.0DEG
Test System: EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity: 83%
Test Distance: 8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.1V I:0.6058A P:122.0W PF:0.9112 Lamp Flux:15722.1x1 lm		
NAME: 8.03.006.0126 3° SP-F620A-108P-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700084
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: ×100cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.09	0.16	0.24	0.32	0.41	0.48	0.56	0.63
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.09	0.17	0.26	0.39	0.52	0.66	0.79	0.92	1.04	1.14	1.25	1.35
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.18	0.34	0.53	0.74	0.94	1.15	1.35	1.53	1.68	1.80	1.93	2.06
-65	0.00	0.00	0.00	0.00	0.00	0.07	0.24	0.47	0.73	1.00	1.31	1.61	1.94	2.26	2.54	2.74	2.89	3.03	3.16
-60	0.00	0.00	0.00	0.00	0.00	0.14	0.43	0.76	1.12	1.47	1.87	2.28	2.73	3.17	3.56	3.81	3.98	4.12	4.26
-55	0.00	0.00	0.00	0.00	0.07	0.34	0.73	1.15	1.64	2.17	2.71	3.18	3.61	4.04	4.42	4.69	4.92	5.10	5.28
-50	0.00	0.00	0.00	0.00	0.14	0.54	1.02	1.54	2.15	2.86	3.55	4.08	4.50	4.91	5.27	5.58	5.85	6.08	6.29
-45	0.00	0.00	0.00	0.02	0.30	0.79	1.36	2.05	2.80	3.52	4.15	4.75	5.30	5.87	6.41	6.91	7.33	7.67	7.96
-40	0.00	0.00	0.00	0.03	0.46	1.05	1.71	2.55	3.44	4.17	4.75	5.41	6.10	6.83	7.55	8.23	8.82	9.27	9.62
-35	0.00	0.00	0.00	0.11	0.62	1.27	2.07	3.03	3.87	4.62	5.35	6.21	7.17	8.22	9.31	10.4	11.4	12.1	12.6
-30	0.00	0.00	0.00	0.19	0.79	1.50	2.44	3.51	4.31	5.07	5.95	7.00	8.23	9.60	11.1	12.6	13.9	14.9	15.6
-25	0.00	0.00	0.00	0.27	0.92	1.69	2.77	3.80	4.63	5.52	6.62	7.96	9.58	11.5	13.7	16.0	18.5	20.8	22.5
-20	0.00	0.00	0.00	0.36	1.04	1.88	3.10	4.09	4.95	5.98	7.28	8.91	10.9	13.4	16.3	19.5	23.1	26.8	29.4
-15	0.00	0.00	0.00	0.41	1.12	2.04	3.30	4.27	5.20	6.36	7.84	9.74	12.2	15.4	19.5	25.7	33.7	44.4	54.0
-10	0.00	0.00	0.00	0.45	1.20	2.21	3.49	4.45	5.45	6.73	8.39	10.6	13.5	17.4	22.8	31.9	44.4	62.1	78.7
-5	0.00	0.00	0.00	0.47	1.26	2.30	3.59	4.55	5.58	6.91	8.68	11.0	14.3	18.6	25.4	37.3	59.3	163	1710
0	0.00	0.00	0.00	0.50	1.31	2.39	3.68	4.66	5.71	7.09	8.96	11.5	15.0	19.7	28.1	42.8	74.2	263	3341
5	0.00	0.00	0.00	0.48	1.28	2.35	3.63	4.60	5.63	6.96	8.78	11.2	14.6	19.1	26.6	39.9	64.8	178	1745
10	0.00	0.00	0.00	0.47	1.25	2.30	3.58	4.54	5.56	6.84	8.59	10.9	14.2	18.5	25.1	37.0	55.4	92.8	149
15	0.00	0.00	0.00	0.44	1.19	2.18	3.44	4.41	5.37	6.55	8.13	10.2	13.0	16.7	21.7	30.0	42.3	64.2	94.7
20	0.00	0.00	0.00	0.40	1.13	2.05	3.30	4.27	5.18	6.25	7.67	9.50	11.8	14.8	18.4	23.0	29.3	35.7	39.9
25	0.00	0.00	0.00	0.33	1.01	1.86	3.00	4.00	4.86	5.82	7.03	8.55	10.5	12.8	15.6	18.9	22.9	26.8	29.3
30	0.00	0.00	0.00	0.25	0.88	1.66	2.71	3.73	4.55	5.38	6.39	7.60	9.08	10.8	12.7	14.7	16.5	17.9	18.7
35	0.00	0.00	0.00	0.18	0.74	1.44	2.33	3.31	4.16	4.93	5.77	6.74	7.89	9.18	10.6	12.1	13.3	14.3	14.9
40	0.00	0.00	0.00	0.11	0.59	1.22	1.95	2.89	3.77	4.47	5.15	5.88	6.70	7.59	8.52	9.39	10.1	10.6	11.0
45	0.00	0.00	0.00	0.05	0.43	0.97	1.59	2.36	3.17	3.90	4.54	5.16	5.81	6.49	7.17	7.79	8.30	8.68	8.97
50	0.00	0.00	0.00	0.00	0.27	0.71	1.23	1.84	2.57	3.32	3.93	4.44	4.93	5.38	5.81	6.18	6.49	6.72	6.92
55	0.00	0.00	0.00	0.00	0.13	0.48	0.90	1.40	1.96	2.55	3.09	3.60	4.08	4.53	4.89	5.20	5.44	5.62	5.80
60	0.00	0.00	0.00	0.00	0.00	0.24	0.57	0.96	1.36	1.78	2.25	2.76	3.24	3.67	3.98	4.22	4.39	4.52	4.67
65	0.00	0.00	0.00	0.00	0.00	0.12	0.30	0.58	0.88	1.21	1.56	1.93	2.28	2.60	2.84	3.04	3.19	3.30	3.43
70	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.20	0.41	0.64	0.88	1.10	1.32	1.53	1.71	1.86	1.98	2.08	2.20
75	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.10	0.20	0.32	0.44	0.56	0.71	0.86	0.99	1.10	1.19	1.27	1.38
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.11	0.19	0.27	0.34	0.41	0.46	0.56
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:221.1V I:0.6058A P:122.0W PF:0.9112 Lamp Flux:15722.1x1 lm		
NAME: 8.03.006.0126 3° SP-F620A-108P-RDM-W	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20240700084
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	PROTECTION ANGLE:

Table--2																	UNIT: ×100cd		
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.55	0.53	0.49	0.44	0.38	0.31	0.26	0.20	0.15	0.11	0.08	0.05	0.03	0.01	0.00	0.00	0.00	0.00	
-75	1.27	1.24	1.18	1.10	1.00	0.89	0.78	0.66	0.54	0.43	0.31	0.21	0.11	0.02	0.00	0.00	0.00	0.00	
-70	1.99	1.94	1.87	1.77	1.63	1.47	1.30	1.12	0.93	0.74	0.55	0.36	0.18	0.04	0.00	0.00	0.00	0.00	
-65	3.09	3.04	2.97	2.84	2.66	2.42	2.13	1.81	1.50	1.20	0.92	0.65	0.38	0.14	0.00	0.00	0.00	0.00	
-60	4.19	4.14	4.06	3.91	3.69	3.36	2.97	2.51	2.06	1.65	1.28	0.93	0.58	0.24	0.01	0.00	0.00	0.00	
-55	5.20	5.13	5.00	4.79	4.52	4.17	3.76	3.32	2.85	2.31	1.76	1.28	0.85	0.43	0.10	0.00	0.00	0.00	
-50	6.21	6.11	5.93	5.68	5.35	4.98	4.56	4.13	3.64	2.97	2.24	1.63	1.11	0.62	0.19	0.00	0.00	0.00	
-45	7.87	7.70	7.39	6.97	6.46	5.89	5.30	4.73	4.16	3.51	2.80	2.04	1.38	0.80	0.30	0.00	0.00	0.00	
-40	9.53	9.29	8.86	8.26	7.56	6.80	6.04	5.32	4.69	4.05	3.35	2.45	1.64	0.99	0.41	0.00	0.00	0.00	
-35	12.5	12.1	11.3	10.3	9.24	8.11	7.04	6.06	5.23	4.48	3.74	2.87	1.92	1.17	0.54	0.05	0.00	0.00	
-30	15.4	14.9	13.8	12.4	10.9	9.41	8.04	6.79	5.77	4.90	4.12	3.29	2.19	1.35	0.67	0.09	0.00	0.00	
-25	22.2	20.5	18.1	15.6	13.3	11.1	9.20	7.60	6.30	5.27	4.40	3.54	2.48	1.50	0.76	0.15	0.00	0.00	
-20	29.0	26.2	22.4	18.8	15.6	12.7	10.4	8.41	6.84	5.64	4.68	3.80	2.77	1.64	0.85	0.21	0.00	0.00	
-15	52.2	41.8	31.7	23.9	18.2	14.4	11.5	9.13	7.30	5.95	4.90	3.97	2.93	1.74	0.91	0.24	0.00	0.00	
-10	75.4	57.3	41.0	28.9	20.9	16.1	12.6	9.86	7.76	6.25	5.11	4.13	3.10	1.84	0.97	0.28	0.00	0.00	
-5	1347	109	51.0	33.3	22.9	17.1	13.2	10.2	8.00	6.39	5.20	4.19	3.18	1.89	0.99	0.29	0.00	0.00	
0	2619	161	60.9	37.7	24.9	18.1	13.8	10.6	8.24	6.52	5.29	4.24	3.26	1.94	1.01	0.30	0.00	0.00	
5	1378	120	54.7	35.4	23.8	17.6	13.5	10.4	8.13	6.46	5.25	4.23	3.22	1.92	1.02	0.31	0.00	0.00	
10	137	79.5	48.5	33.0	22.7	17.1	13.2	10.3	8.02	6.40	5.21	4.21	3.19	1.91	1.02	0.31	0.00	0.00	
15	87.9	56.6	37.8	27.2	20.0	15.5	12.2	9.58	7.58	6.12	5.01	4.06	3.05	1.82	0.96	0.28	0.00	0.00	
20	38.9	33.7	27.1	21.5	17.3	13.9	11.1	8.88	7.14	5.83	4.82	3.92	2.92	1.73	0.89	0.24	0.00	0.00	
25	28.7	25.6	21.6	17.9	14.8	12.1	9.91	8.08	6.62	5.49	4.57	3.72	2.66	1.60	0.83	0.21	0.00	0.00	
30	18.5	17.6	16.1	14.3	12.3	10.4	8.75	7.29	6.10	5.15	4.32	3.52	2.40	1.47	0.76	0.17	0.00	0.00	
35	14.7	14.1	13.0	11.8	10.3	8.89	7.63	6.48	5.53	4.72	3.96	3.12	2.09	1.28	0.64	0.12	0.00	0.00	
40	10.9	10.5	10.00	9.24	8.32	7.40	6.51	5.68	4.96	4.30	3.61	2.72	1.78	1.09	0.53	0.06	0.00	0.00	
45	8.88	8.62	8.24	7.71	7.06	6.38	5.69	5.03	4.43	3.79	3.05	2.25	1.50	0.90	0.40	0.03	0.00	0.00	
50	6.85	6.70	6.49	6.19	5.80	5.36	4.87	4.39	3.90	3.28	2.50	1.78	1.21	0.71	0.27	0.00	0.00	0.00	
55	5.74	5.63	5.47	5.24	4.93	4.56	4.13	3.63	3.11	2.56	1.95	1.40	0.92	0.50	0.15	0.00	0.00	0.00	
60	4.62	4.55	4.46	4.30	4.06	3.76	3.39	2.88	2.31	1.83	1.40	1.01	0.64	0.30	0.04	0.00	0.00	0.00	
65	3.39	3.34	3.26	3.13	2.93	2.69	2.41	2.05	1.66	1.31	0.98	0.68	0.40	0.15	0.02	0.00	0.00	0.00	
70	2.16	2.12	2.06	1.95	1.80	1.63	1.43	1.22	1.00	0.78	0.56	0.35	0.15	0.00	0.00	0.00	0.00	0.00	
75	1.33	1.30	1.26	1.18	1.08	0.96	0.83	0.68	0.54	0.40	0.28	0.17	0.08	0.00	0.00	0.00	0.00	0.00	
80	0.50	0.48	0.45	0.42	0.35	0.29	0.22	0.14	0.07	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2024-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: