

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		3345.6 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	54.8V x 52.2H
	At 50% of Imax	25.1V x 23.8H
	At 90% of Imax	5.9V x 9.2H
Beam Flux	Total	1000.0 lumens per klm.
	To 10% of Imax	707.2 lumens per klm.
	To 50% of Imax	309.3 lumens per klm.
	To 90% of Imax	31.8 lumens per klm.
Upward LOR		0.0 %
Downward LOR		100.0 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:33DEG
Operators:QC1
Test Date:2022-08-18

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:59%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.8V I:0.6019A P:130.6W PF:0.9826 Lamp Flux:3817.52x1 lm		
NAME: 8.90.004.0006 SP-LX-F380-150W-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20220080034
MFR.: TPK	SUR.:	PROTECTION ANGLE:

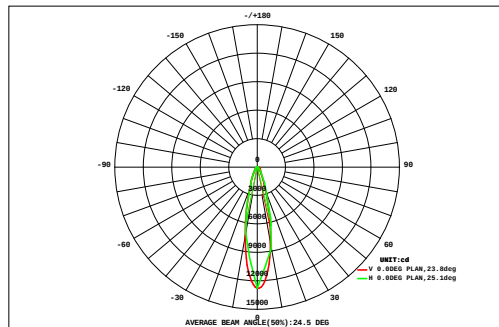

DATA OF LAMP		Eff:29.24lm/W	
MODEL	SP-LX-F380-150W-RDM	Imax(cd)	12772
NOMINAL POWER(W)	134	AVAILABILITY(%)	70.5
RATED VOLTAGE(V)	220	Avai. FLUX(lm)	2693
NOMINAL FLUX(lm)	3817.52	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	3818
TEST VOLTAGE(V)	220.7	θ @50%(H,V)	24, 25DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT: lm				Φ t	Φ a
	45	0.80	1.09	1.38	1.68	2.01	2.34	2.66	2.93	3.11	3.19	3.13	2.96	2.69	2.38	2.05	1.72	1.43	1.14	38.7	0.00	
	40	1.13	1.47	1.81	2.20	2.64	3.07	3.48	3.80	3.99	4.00	3.84	3.53	3.13	2.70	2.26	1.86	1.51	1.16	47.6	0.00	
	35	1.10	1.50	1.95	2.50	3.18	3.98	4.86	5.72	6.37	6.64	6.44	5.83	4.99	4.10	3.27	2.57	2.00	1.54	68.5	0.00	
	30	1.48	1.97	2.58	3.37	4.35	5.52	6.77	7.89	8.58	8.63	8.01	6.93	5.67	4.48	3.46	2.64	2.00	1.49	85.8	0.00	
	25	1.37	1.93	2.64	3.65	5.13	7.25	10.1	13.6	16.7	18.0	16.8	13.8	10.4	7.49	5.31	3.77	2.71	1.96	143	94.9	
	20	1.84	2.57	3.64	5.24	7.65	11.2	15.8	20.9	24.5	24.5	21.0	15.9	11.2	7.66	5.22	3.61	2.54	1.81	187	145	
	15	1.58	2.27	3.27	4.87	7.60	12.4	21.0	34.2	48.2	54.8	49.4	35.9	22.3	13.4	8.20	5.22	3.45	2.35	330	296	
	10	2.09	3.05	4.60	7.26	12.2	21.1	36.8	58.2	74.7	75.2	59.1	37.6	21.1	12.1	7.22	4.54	2.99	2.05	442	409	
	5	1.68	2.42	3.56	5.47	8.86	15.4	28.7	51.1	76.4	89.5	81.0	57.1	33.1	17.9	10.1	6.06	3.84	2.54	495	463	
	0	2.17	3.20	4.94	8.04	13.9	26.0	49.1	80.1	103	101	76.9	46.0	24.1	12.9	7.38	4.57	2.99	2.03	569	537	
	-5	1.60	2.27	3.26	4.82	7.41	11.9	20.1	34.8	53.3	65.0	61.4	45.5	27.7	15.8	9.23	5.66	3.64	2.44	376	342	
	-10	1.95	2.79	4.11	6.26	9.88	16.0	25.1	36.1	43.1	41.0	31.3	20.5	12.9	8.49	5.62	3.79	2.62	1.85	273	236	
	-15	1.40	1.95	2.66	3.68	5.15	7.35	10.6	15.4	21.6	26.0	25.6	20.8	14.5	9.59	6.35	4.29	2.96	2.08	182	139	
	-20	1.62	2.21	3.00	4.07	5.49	7.15	8.63	9.14	8.34	7.06	6.15	5.64	5.23	4.42	3.48	2.66	2.01	1.50	87.8	22.9	
	-25	1.13	1.55	2.01	2.60	3.35	4.29	5.45	6.77	8.04	8.83	8.74	7.81	6.45	5.06	3.86	2.91	2.19	1.64	82.7	8.22	
-30	1.24	1.60	2.02	2.50	3.01	3.49	3.84	3.95	3.84	3.63	3.44	3.25	3.00	2.67	2.28	1.89	1.51	1.17	48.3	0.00		
-35	0.85	1.15	1.45	1.78	2.14	2.55	2.96	3.35	3.66	3.82	3.80	3.58	3.21	2.78	2.34	1.92	1.56	1.22	44.1	0.00		
-40	0.87	1.13	1.35	1.58	1.81	2.01	2.16	2.23	2.25	2.21	2.14	2.02	1.88	1.71	1.51	1.31	1.10	0.84	30.1	0.00		
-45	-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)				10	15	20	25	30	35	40	45		
Φ t	25.9	36.1	50.2	71.6	106	163	258	390	509	543	468	335	214	136	89.2	61.0	43.0	30.8	3530	---		
Φ a	0.00	0.00	0.00	3.80	40.9	113	215	348	468	504	428	295	174	83.5	19.2	0.00	0.00	0.00	---	2693		

one-half-peak spread: U:11.4,D:13.9 , L:11.5,R:12.5


NEMA Beam Type: Type 4

$H(\beta)$ Range:-90 - 90DEG
 $H(\beta)$ Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:33DEG
 Operators:QC1
 Test Date:2022-08-18

$V(B)$ Range:-80 - 80DEG
 $V(B)$ Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:59%
 Test Distance:8.300m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.8V I:0.6019A P:130.6W PF:0.9826 Lamp Flux:3817.52x1 lm		
NAME: 8.90.004.0006 SP-LX-F380-150W-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20220080034
MFR.: TPK	SUR.:	PROTECTION ANGLE:

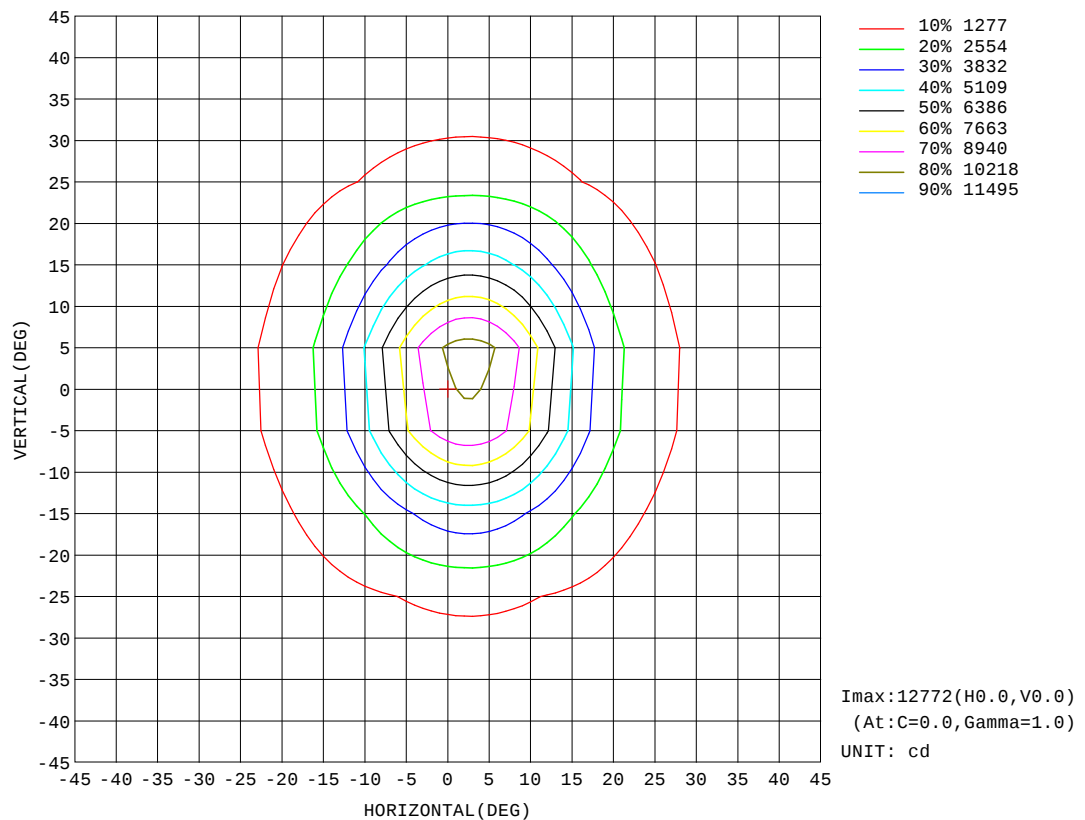


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:33DEG
Operators:QC1
Test Date:2022-08-18

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:59%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:220.8V I:0.6019A P:130.6W PF:0.9826 Lamp Flux:3817.52x1 lm		
NAME: 8.90.004.0006 SP-LX-F380-150W-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20220080034
MFR.: TPK	SUR.:	PROTECTION ANGLE:

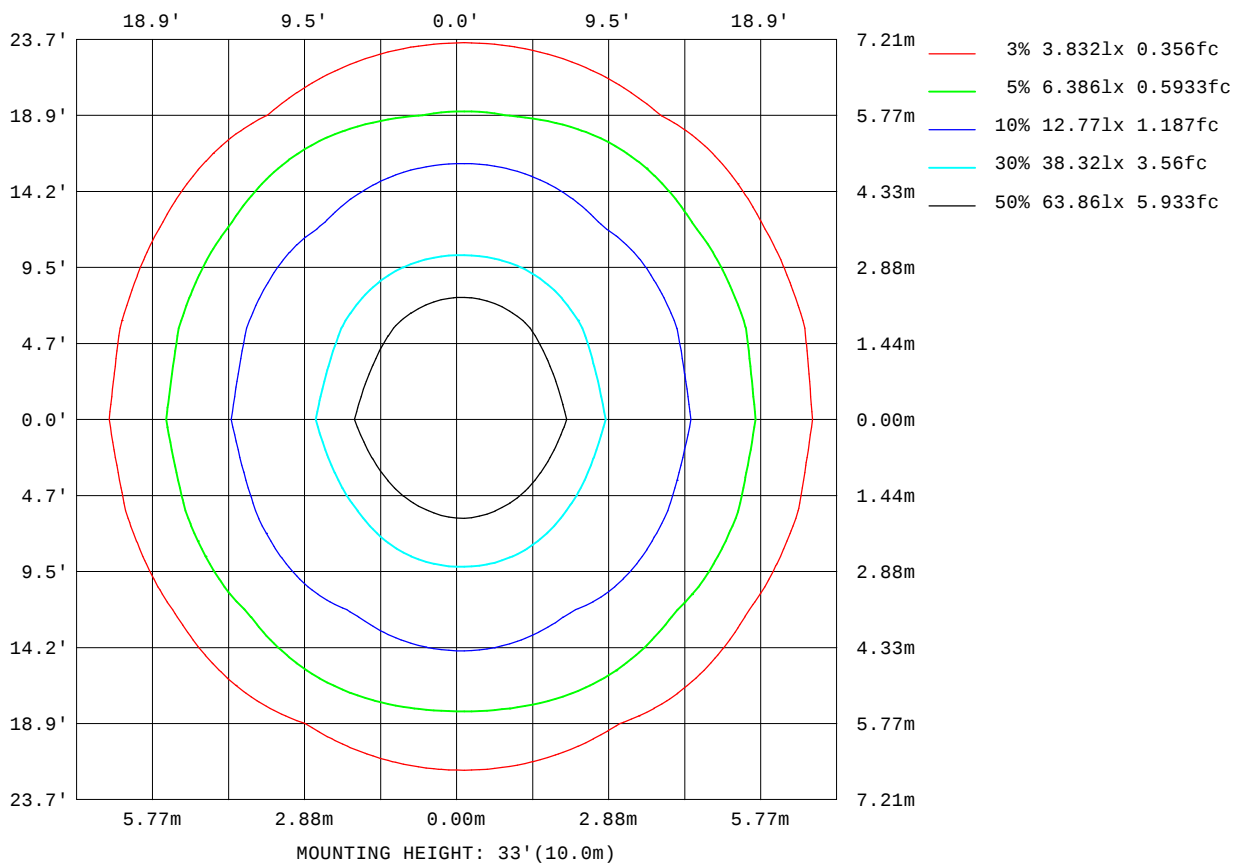


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:33DEG
Operators:QC1
Test Date:2022-08-18

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:59%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:220.8V I:0.6019A P:130.6W PF:0.9826 Lamp Flux:3817.52x1 lm		
NAME: 8.90.004.0006 SP-LX-F380-150W-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20220080034
MFR.: TPK	SUR.:	PROTECTION ANGLE:

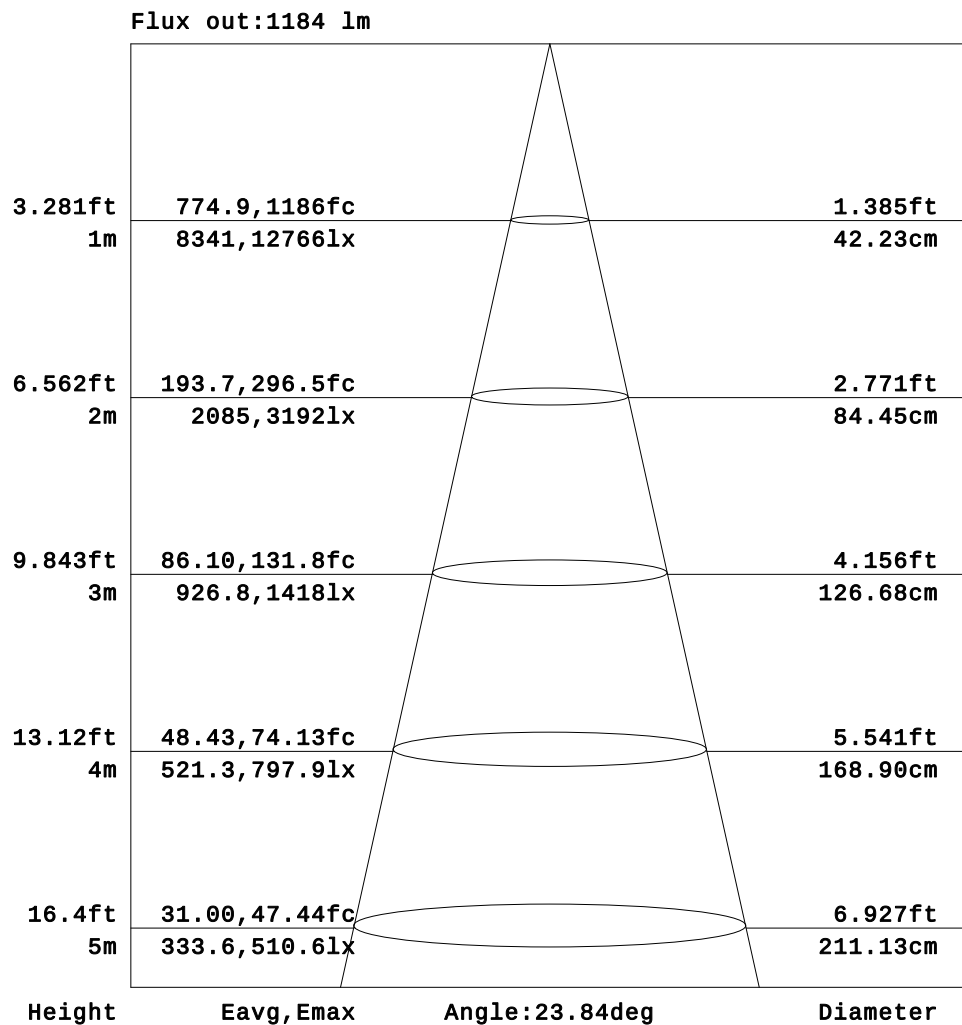


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:33DEG
Operators:QC1
Test Date:2022-08-18

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:59%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

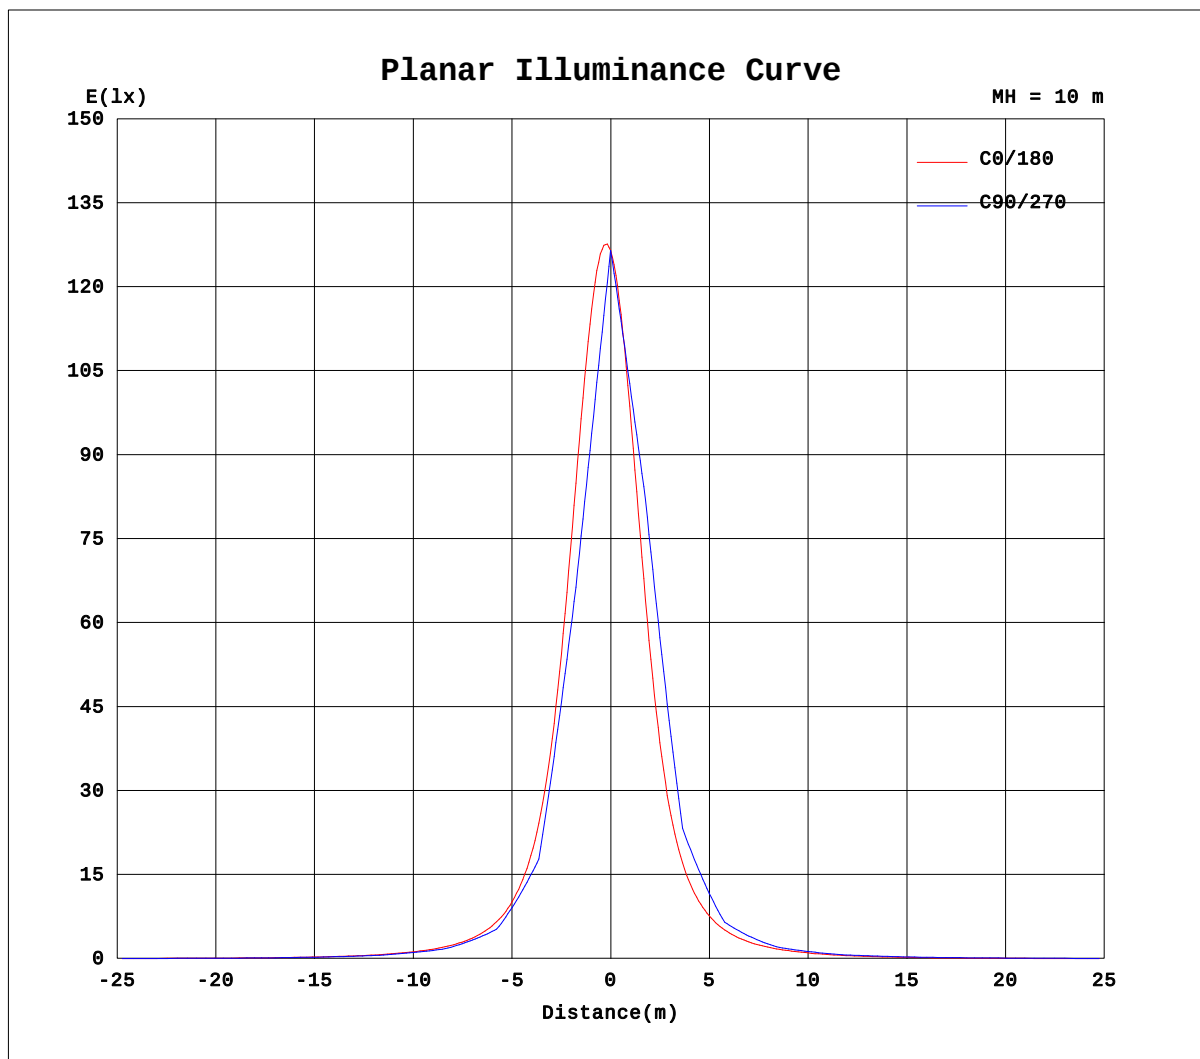

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:33DEG
Operators:QC1
Test Date:2022-08-18

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
Humidity:59%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.8V I:0.6019A P:130.6W PF:0.9826 Lamp Flux:3817.52x1 lm		
NAME: 8.90.004.0006 SP-LX-F380-150W-RDM	TYPE:LED	WEIGHT:
DIM.:	SPEC.:	SERIAL No.:20220080034
MFR.: TPK	SUR.:	PROTECTION ANGLE:

Table--1

UNIT: ×10cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.26	0.61	0.89	1.31	1.77	2.06	2.23	2.36	2.44
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.86	1.43	2.08	2.99	3.84	4.27	4.58	4.80	4.92	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.41	1.21	1.82	2.66	3.80	4.97	6.11	7.04	7.69	8.15	8.49	8.68
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.21	1.42	2.98	4.06	5.42	7.06	8.82	10.0	10.8	11.5	12.0	12.4	12.5
-55	0.00	0.00	0.00	0.00	0.00	0.17	0.96	2.50	4.13	5.75	7.53	9.63	11.6	13.2	14.4	15.4	16.2	16.9	17.2
-50	0.00	0.00	0.00	0.00	0.00	0.84	2.83	4.84	6.54	8.80	11.3	13.8	15.8	17.3	18.8	20.0	21.0	21.7	22.0
-45	0.00	0.00	0.00	0.00	0.02	1.15	3.40	5.64	7.80	10.4	13.4	16.5	19.1	21.5	23.9	26.3	28.3	29.8	30.7
-40	0.00	0.00	0.00	0.00	0.79	3.08	5.79	8.03	11.0	14.4	18.0	21.2	24.3	27.5	31.1	34.2	36.9	38.8	39.7
-35	0.00	0.00	0.00	0.00	0.50	2.86	5.85	8.37	11.6	15.4	19.7	24.0	28.4	33.5	39.4	45.8	52.0	57.2	60.2
-30	0.00	0.00	0.00	0.00	1.82	5.20	7.85	11.1	15.2	19.8	24.9	30.1	36.4	44.0	52.9	62.4	71.6	78.6	81.6
-25	0.00	0.00	0.00	0.00	1.34	4.58	7.59	10.9	15.1	20.1	26.0	32.6	41.0	52.4	67.5	86.9	110	132	147
-20	0.00	0.00	0.00	0.37	3.06	6.62	9.68	13.9	18.8	24.8	32.2	41.3	53.9	71.7	96.6	129	167	200	216
-15	0.00	0.00	0.00	0.00	1.97	5.77	8.85	12.8	17.8	24.0	31.7	41.5	56.0	78.3	114	171	258	366	447
-10	0.00	0.00	0.00	0.72	3.77	7.39	10.9	15.7	21.5	29.0	38.4	52.0	73.6	109	171	274	434	609	702
-5	0.00	0.00	0.00	0.00	2.39	6.34	9.59	14.0	19.5	26.4	35.7	48.3	68.4	102	163	277	483	755	961
0	0.00	0.00	0.00	0.92	4.18	7.82	11.5	16.5	22.6	31.1	41.9	58.3	86.0	136	230	422	745	1099	1277
5	0.00	0.00	0.00	0.00	2.42	6.42	9.68	14.1	19.7	26.7	36.2	49.1	69.9	105	170	292	517	815	1041
10	0.00	0.00	0.00	0.77	3.87	7.54	11.1	16.0	21.9	29.7	39.6	54.1	77.6	117	190	317	522	749	868
15	0.00	0.00	0.00	0.00	2.07	5.97	9.11	13.2	18.4	24.8	33.0	43.6	59.5	84.6	127	196	309	452	559
20	0.00	0.00	0.00	0.47	3.26	6.92	10.1	14.4	19.6	26.0	34.0	44.2	58.8	80.2	111	155	208	258	283
25	0.00	0.00	0.00	0.00	1.49	4.89	8.00	11.5	15.9	21.2	27.6	34.9	44.6	58.1	76.9	102	134	166	188
30	0.00	0.00	0.00	0.00	2.04	5.60	8.37	11.8	16.2	21.1	26.8	32.8	40.3	49.6	60.8	73.4	86.1	96.1	101
35	0.00	0.00	0.00	0.00	0.69	3.24	6.38	9.09	12.6	16.7	21.4	26.2	31.4	37.7	45.1	53.3	61.7	68.9	73.3
40	0.00	0.00	0.00	0.00	1.03	3.60	6.45	8.94	12.2	15.9	19.9	23.6	27.3	31.5	35.8	39.9	43.5	46.1	47.3
45	0.00	0.00	0.00	0.00	0.13	1.51	4.02	6.43	8.84	11.7	15.0	18.4	21.5	24.4	27.5	30.4	33.1	35.1	36.3
50	0.00	0.00	0.00	0.00	0.00	1.24	3.58	5.73	7.66	10.2	13.0	15.8	17.9	19.8	21.6	23.1	24.4	25.3	25.7
55	0.00	0.00	0.00	0.00	0.00	0.33	1.39	3.24	5.09	6.91	8.97	11.3	13.5	15.3	16.7	18.0	19.0	19.8	20.3
60	0.00	0.00	0.00	0.00	0.00	0.00	0.64	2.23	3.89	5.16	6.82	8.70	10.6	11.9	12.9	13.7	14.4	14.8	15.0
65	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.75	1.67	2.60	3.89	5.17	6.59	7.93	9.04	9.79	10.4	10.8	11.1
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	1.00	1.99	2.69	3.69	4.89	5.83	6.36	6.78	7.06	7.22
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.27	0.84	1.20	1.63	2.18	2.76	3.08	3.31	3.49	3.64
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.12
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

$H(\beta)$ Range:-90 - 90DEG
 $H(\beta)$ Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:33DEG
 Operators:QC1
 Test Date:2022-08-18

$V(\beta)$ Range:-80 - 80DEG
 $V(\beta)$ Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:59%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.8V I:0.6019A P:130.6W PF:0.9826 Lamp Flux:3817.52x1 lm																	
NAME: 8.90.004.0006 SP-LX-F380-150W-RDM									TYPE:LED						WEIGHT:		
DIM.:									SPEC.:						SERIAL No.:20220080034		
MFR.: TPK									SUR.:						PROTECTION ANGLE:		

Table--2

UNIT: ×10cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	2.48	2.46	2.40	2.28	1.99	1.57	1.20	0.96	0.64	0.18	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	4.95	4.89	4.72	4.38	3.62	2.82	2.21	1.73	0.90	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	8.74	8.66	8.44	8.08	7.46	6.58	5.46	4.40	3.33	2.31	1.53	0.70	0.16	0.00	0.00	0.00	0.00	0.00
-60	12.5	12.3	11.9	11.3	10.6	9.50	7.82	6.25	4.89	3.82	2.36	0.87	0.00	0.00	0.00	0.00	0.00	0.00
-55	17.3	17.0	16.5	15.8	14.8	13.7	12.1	10.2	8.16	6.43	4.82	3.15	1.45	0.40	0.00	0.00	0.00	0.00
-50	21.9	21.5	20.6	19.5	18.2	16.7	14.9	12.4	9.99	7.71	5.91	4.05	1.70	0.24	0.00	0.00	0.00	0.00
-45	30.8	30.1	28.7	26.8	24.5	22.2	19.8	17.1	14.0	11.0	8.38	6.22	3.93	1.53	0.15	0.00	0.00	0.00
-40	39.3	37.8	35.3	32.3	29.0	25.7	22.6	19.3	15.6	12.1	9.02	6.66	4.03	1.34	0.00	0.00	0.00	0.00
-35	60.4	57.7	52.7	46.6	40.3	34.4	29.2	24.5	20.1	15.8	12.0	8.81	6.24	3.18	0.73	0.00	0.00	0.00
-30	80.0	74.0	65.4	55.8	46.7	38.7	32.0	26.3	21.0	16.3	12.3	8.80	6.14	2.70	0.35	0.00	0.00	0.00
-25	147	133	111	87.7	68.2	52.9	41.5	32.9	26.2	20.3	15.4	11.1	7.87	4.78	1.44	0.00	0.00	0.00
-20	206	175	137	103	76.5	57.2	43.6	33.9	26.4	20.1	14.9	10.6	7.35	3.83	0.87	0.00	0.00	0.00
-15	449	370	263	173	115	79.2	56.6	42.0	32.0	24.1	18.0	13.0	9.06	5.92	2.03	0.00	0.00	0.00
-10	644	479	307	190	121	80.6	56.4	41.2	31.1	22.9	16.8	12.0	8.27	4.76	1.24	0.00	0.00	0.00
-5	962	757	485	279	165	103	68.8	48.6	35.9	26.6	19.6	14.2	9.75	6.49	2.42	0.00	0.00	0.00
0	1152	815	473	259	151	93.4	62.6	44.5	32.9	24.2	17.7	12.5	8.54	5.02	1.34	0.00	0.00	0.00
5	1043	819	520	295	172	106	70.6	49.6	36.5	27.0	19.9	14.4	9.88	6.58	2.50	0.00	0.00	0.00
10	795	581	361	213	132	85.9	59.2	42.9	32.2	23.6	17.3	12.4	8.49	4.97	1.34	0.00	0.00	0.00
15	563	458	315	200	129	86.5	60.7	44.4	33.6	25.3	18.8	13.6	9.42	6.22	2.23	0.00	0.00	0.00
20	267	221	167	121	87.0	63.4	47.4	36.4	28.2	21.3	15.9	11.2	7.76	4.22	1.04	0.00	0.00	0.00
25	189	168	136	104	78.6	59.5	45.8	35.9	28.3	21.8	16.5	12.0	8.42	5.30	1.71	0.00	0.00	0.00
30	98.5	90.2	78.2	65.4	53.5	43.5	35.5	28.8	23.1	17.8	13.4	9.58	6.73	3.23	0.65	0.00	0.00	0.00
35	73.7	69.9	63.1	54.8	46.6	39.1	32.7	27.4	22.3	17.5	13.3	9.77	6.98	3.84	1.08	0.00	0.00	0.00
40	46.8	44.8	41.5	37.6	33.4	29.3	25.5	21.8	17.6	13.7	10.3	7.56	4.96	1.81	0.00	0.00	0.00	0.00
45	36.5	35.5	33.7	31.2	28.4	25.5	22.6	19.6	16.1	12.8	9.71	7.23	4.86	2.13	0.36	0.00	0.00	0.00
50	25.6	25.0	24.0	22.7	21.1	19.3	17.3	14.7	11.8	9.24	7.06	5.18	2.55	0.73	0.00	0.00	0.00	0.00
55	20.4	20.1	19.5	18.6	17.5	16.2	14.5	12.3	9.98	7.87	6.03	4.23	2.26	0.65	0.00	0.00	0.00	0.00
60	15.0	14.8	14.3	13.7	12.9	11.8	10.0	8.09	6.34	4.99	3.67	1.78	0.51	0.00	0.00	0.00	0.00	0.00
65	11.1	11.1	10.8	10.4	9.76	8.78	7.50	6.05	4.82	3.56	2.41	1.26	0.46	0.00	0.00	0.00	0.00	0.00
70	7.27	7.20	6.99	6.65	5.97	4.82	3.78	3.02	2.32	1.19	0.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	3.71	3.71	3.61	3.40	3.15	2.64	2.09	1.64	1.31	0.82	0.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.17	0.18	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:33DEG
 Operators:QC1
 Test Date:2022-08-18

V(β) Range:-80 - 80DEG
 V(β) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.275
 Humidity:59%
 Test Distance:8.300m [K=1.0000]
 Remarks: