


Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)		10199.6 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	29.8V x 27.9H
	At 50% of Imax	14.8V x 13.5H
	At 90% of Imax	3.9V x 5.3H
Beam Flux	Total	979.2 lumens per klm.
	To 10% of Imax	717.7 lumens per klm.
	To 50% of Imax	325.2 lumens per klm.
	To 90% of Imax	32.3 lumens per klm.
Upward LOR		0.0 %
Downward LOR		97.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.6V I:0.2066A P:14.42W PF:0.5788 Freq:50.00Hz Lamp Flux:323.196x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080037
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

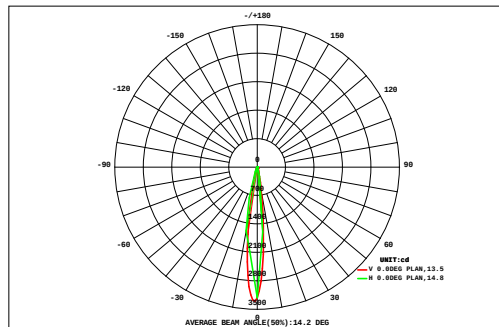

DATA OF LAMP		Eff:22.41lm/W	
MODEL: PZT-R170-12P-RDM-B		Imax(cd)	3296
NOMINAL POWER(W)	14	AVAILABILITY(%)	75.8
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	244.8
NOMINAL FLUX(lm)	323.196	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	323.2
TEST VOLTAGE(V)	120	θ @50%(H,V)	14,15DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
	27	0.06	0.07	0.09	0.11	0.14	0.16	0.19	0.21	0.23	0.24	0.23	0.22	0.20	0.17	0.14	0.12	0.10	0.08	2.75	0.00	
	24	0.06	0.08	0.10	0.13	0.17	0.22	0.27	0.33	0.38	0.42	0.42	0.39	0.35	0.29	0.23	0.18	0.14	0.11	4.29	0.00	
	21	0.08	0.11	0.14	0.18	0.24	0.30	0.38	0.45	0.51	0.53	0.52	0.46	0.39	0.32	0.25	0.19	0.15	0.11	5.31	0.00	
	18	0.11	0.14	0.18	0.24	0.31	0.39	0.48	0.57	0.64	0.65	0.61	0.53	0.43	0.34	0.26	0.20	0.15	0.11	6.34	0.00	
	15	0.08	0.12	0.16	0.23	0.34	0.51	0.83	1.40	2.23	2.96	3.05	2.44	1.61	0.97	0.60	0.39	0.26	0.18	18.4	14.6	
	12	0.10	0.14	0.20	0.29	0.44	0.72	1.23	2.14	3.33	4.17	4.03	3.05	1.91	1.13	0.68	0.43	0.29	0.20	24.5	21.1	
	9	0.14	0.20	0.28	0.43	0.69	1.16	2.06	3.53	5.07	5.56	4.60	2.98	1.67	0.98	0.56	0.36	0.24	0.17	30.7	27.3	
		0.12	0.16	0.24	0.35	0.56	0.95	1.74	3.24	5.28	6.70	6.49	4.85	2.90	1.54	0.83	0.49	0.31	0.21	37.0	33.8	
		0.09	0.12	0.18	0.26	0.40	0.68	1.31	2.81	5.35	7.82	8.51	6.90	4.27	2.16	1.12	0.63	0.39	0.25	43.2	40.2	
		0.14	0.20	0.30	0.47	0.82	1.56	3.27	6.19	9.04	9.82	8.00	4.93	2.44	1.14	0.63	0.39	0.25	0.17	49.7	46.6	
		0.13	0.19	0.28	0.44	0.75	1.43	2.98	5.62	8.21	8.90	7.27	4.51	2.25	1.07	0.60	0.37	0.24	0.16	45.4	42.2	
	-9	0.07	0.10	0.13	0.17	0.22	0.28	0.32	0.60	1.51	2.85	3.68	3.42	2.37	1.34	0.73	0.45	0.30	0.20	18.7	15.7	
		0.08	0.11	0.15	0.19	0.25	0.31	0.39	0.45	0.44	0.73	1.12	1.21	0.99	0.67	0.43	0.29	0.21	0.15	8.16	3.52	
	-12	0.09	0.13	0.17	0.23	0.30	0.38	0.36	0.13	0.00	0.00	0.00	0.00	0.00	0.03	0.09	0.12	0.10	0.08	2.22	0.00	
	-15	0.04	0.06	0.08	0.11	0.15	0.19	0.26	0.34	0.45	0.55	0.60	0.56	0.46	0.36	0.27	0.20	0.15	0.11	4.95	0.00	
	-18	0.03	0.04	0.06	0.07	0.09	0.10	0.12	0.14	0.18	0.25	0.32	0.34	0.30	0.25	0.20	0.15	0.12	0.09	2.85	0.00	
	-21	0.04	0.05	0.07	0.08	0.09	0.10	0.09	0.07	0.04	0.03	0.02	0.03	0.03	0.04	0.05	0.05	0.04	0.03	0.96	0.00	
	-24	0.02	0.03	0.04	0.05	0.06	0.07	0.07	0.07	0.08	0.08	0.09	0.08	0.08	0.07	0.06	0.05	0.04	0.03	1.07	0.00	
-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)				6	9	12	15	18	21	24	27		
Φ t	1.47	2.05	2.85	4.05	6.02	9.51	16.3	28.3	43.0	52.3	49.6	36.9	22.6	12.9	7.74	5.06	3.47	2.45	306	---		
Φ a	0.00	0.00	0.00	0.00	0.81	4.64	12.5	25.3	39.9	49.1	46.5	34.1	20.2	9.83	1.89	0.00	0.00	0.00	---	245		


one-half-peak spread: U:5.0,D:10.0 , L:6.5,R:7.5 Beam Type: Type 2 x 3 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.6V I:0.2066A P:14.42W PF:0.5788 Freq:50.00Hz Lamp Flux:323.196x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080037
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

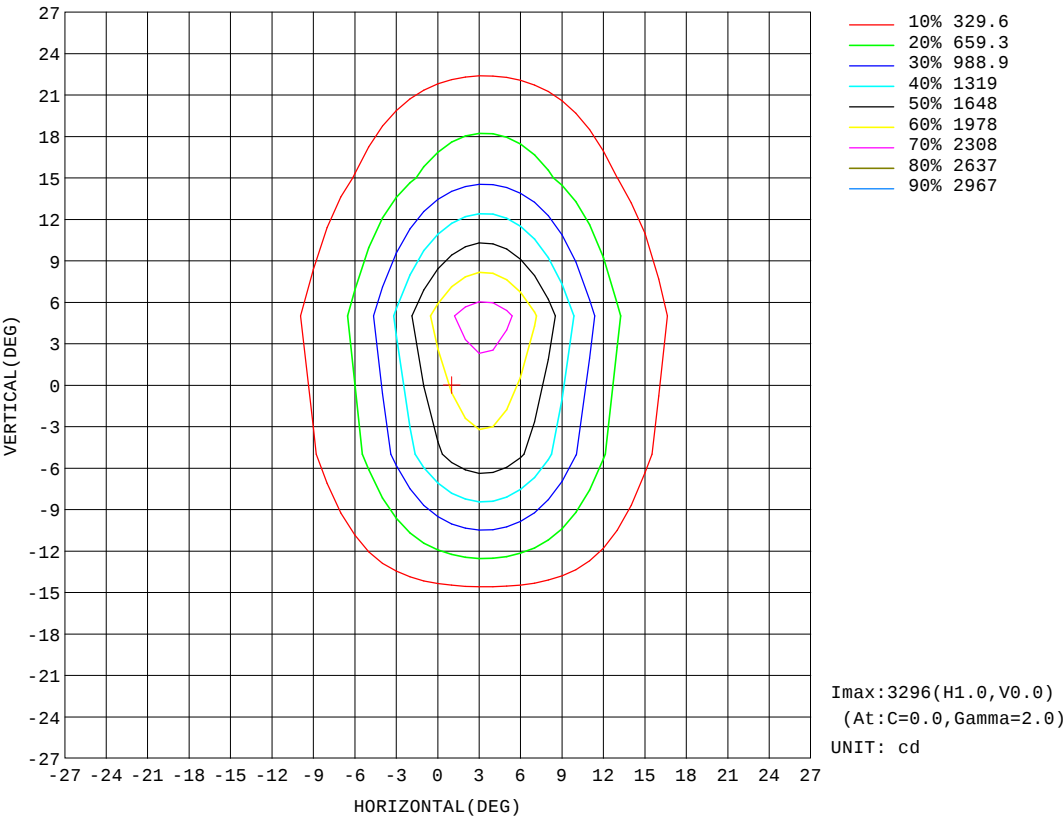


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:120.6V I:0.2066A P:14.42W PF:0.5788 Freq:50.00Hz Lamp Flux:323.196x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080037
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

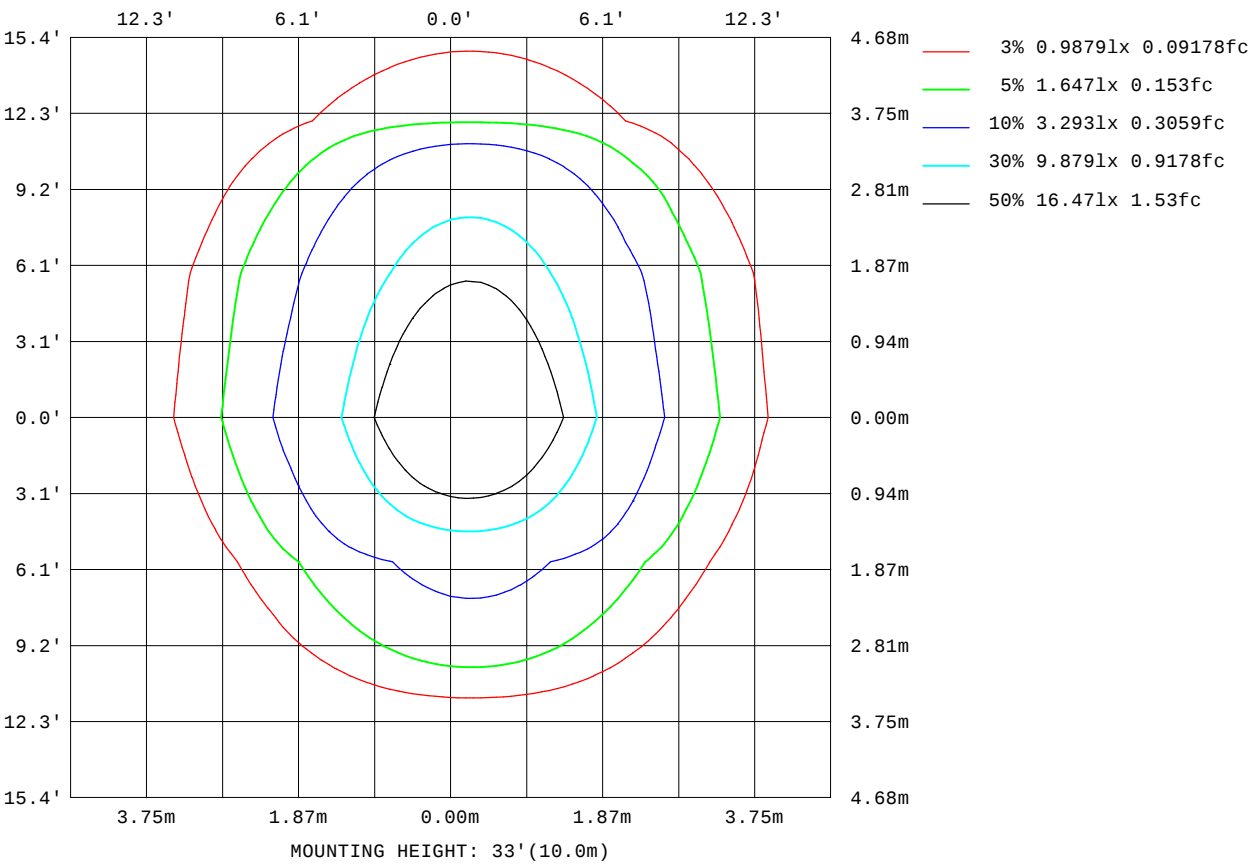

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

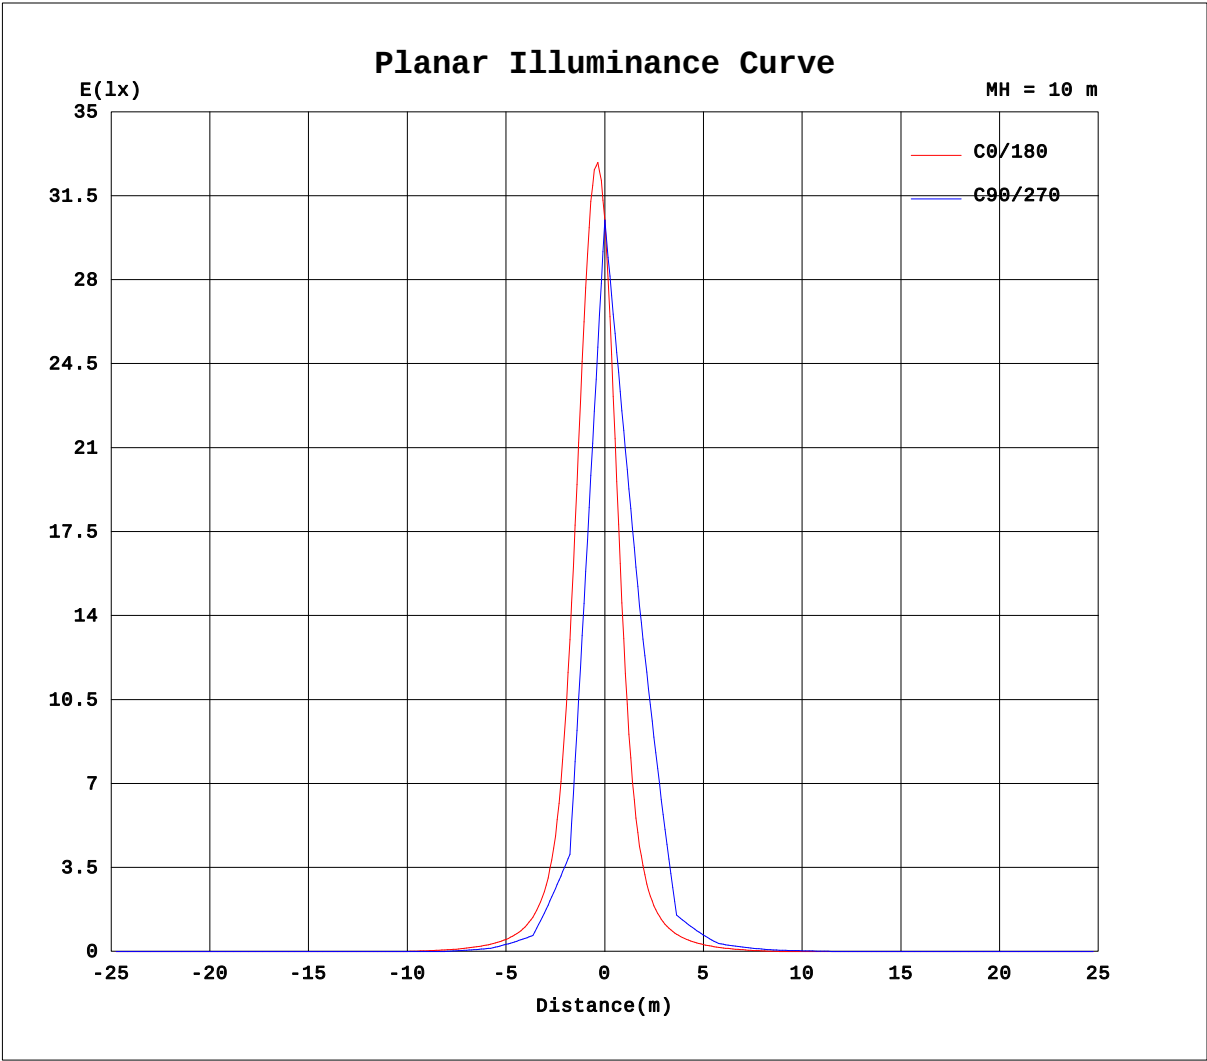


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.6V I:0.2066A P:14.42W PF:0.5788 Freq:50.00Hz Lamp Flux:323.196x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080037
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

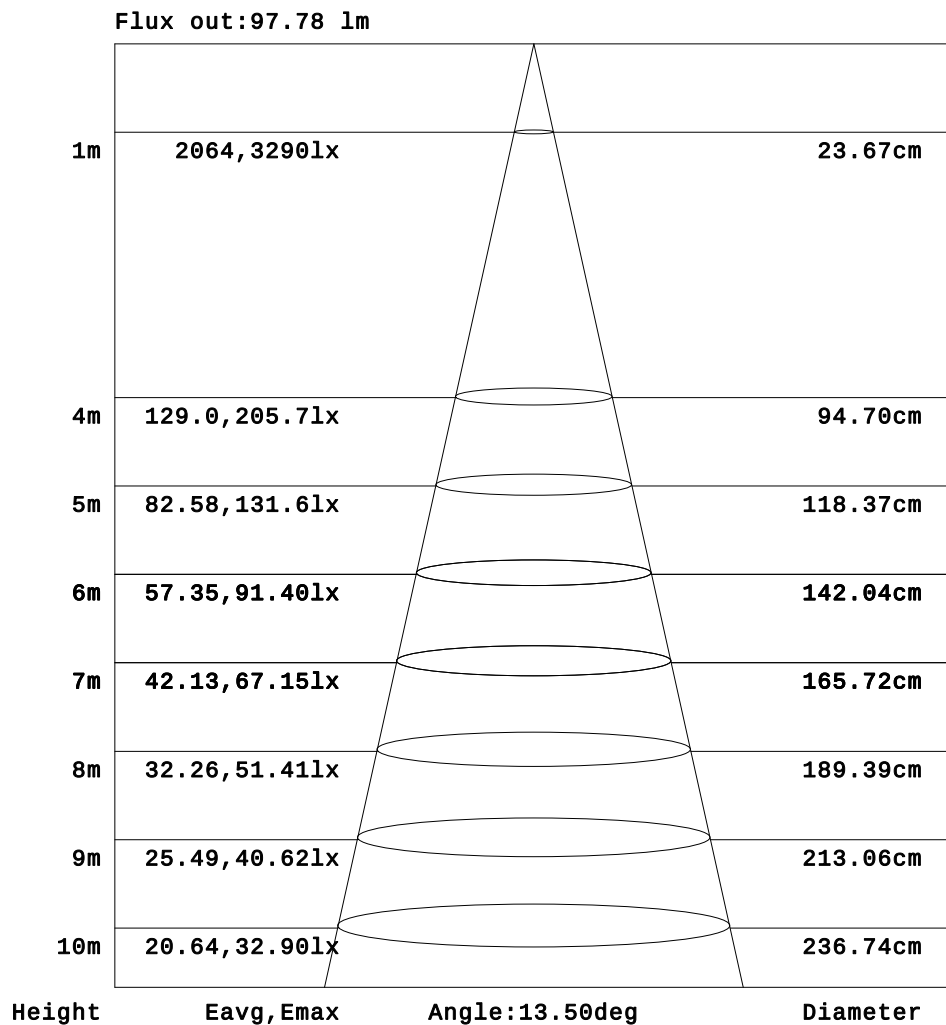

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.6V I:0.2066A P:14.42W PF:0.5788 Freq:50.00Hz Lamp Flux:323.196x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080037
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: cd			
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.08	3.24	5.38	7.35	9.49	11.0	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	3.87	8.21	12.4	16.2	20.7	22.4	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.38	3.77	8.74	15.6	24.0	33.3	43.6	51.0	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.37	10.5	18.9	29.1	43.0	58.3	73.7	82.4	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.24	4.29	12.4	23.1	38.7	62.6	101	167	242	
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.05	11.4	22.0	38.5	64.6	109	192	322	440	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.98	10.2	21.0	37.5	65.4	120	266	721	1605	
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.62	17.0	31.6	55.1	99.7	210	578	1796	3217	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.66	12.5	24.7	43.0	74.5	140	325	915	2095	
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	7.02	16.9	30.7	51.5	88.8	171	376	925	1597	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.95	10.8	21.4	35.8	58.4	98.3	185	397	782	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.55	12.5	22.5	35.5	53.8	80.5	117	159	188	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.02	6.05	13.6	22.6	34.3	49.8	70.0	94.7	116	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	5.46	11.6	18.4	26.0	34.2	42.4	49.1	52.7	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.53	4.94	9.95	15.4	21.0	26.7	31.7	34.9	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.27	5.78	9.27	12.5	15.3	17.3	18.3	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.41	2.18	3.94	5.62	7.65	9.35	10.4	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.30	1.52	2.41	2.88	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.54	1.05	1.37	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.6V I:0.2066A P:14.42W PF:0.5788 Freq:50.00Hz Lamp Flux:323.196x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080037
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	11.1	10.1	8.48	6.35	4.04	1.74	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	21.5	19.0	15.3	10.9	6.25	1.67	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	52.5	47.5	38.4	28.2	19.1	11.3	5.19	1.70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	80.8	69.2	53.4	37.8	25.4	15.5	7.31	1.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	262	199	127	78.4	48.6	29.4	16.2	6.58	1.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	405	265	156	91.5	54.7	31.7	16.4	6.37	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	1795	997	361	159	82.8	46.9	26.3	12.7	3.95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	2669	1088	346	151	77.0	43.3	23.6	11.3	2.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	2365	1286	454	186	93.6	52.6	30.5	15.9	5.91	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	1356	633	262	128	70.7	41.4	24.4	11.4	3.38	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	883	529	247	123	70.3	42.7	26.1	13.9	4.80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	178	140	98.5	66.4	44.2	28.9	17.6	7.89	1.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	120	103	78.4	56.2	39.1	26.5	16.7	8.59	1.70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	51.7	46.7	39.3	31.2	23.2	15.7	9.18	2.96	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	35.5	33.3	29.1	23.7	18.0	12.5	7.18	2.68	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	18.2	16.9	14.6	11.8	8.45	4.88	1.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	10.6	10.1	8.76	6.90	4.91	3.16	1.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	2.81	2.43	1.51	0.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	1.44	1.30	0.96	0.41	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: