

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		9829.0 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	29.4V x 27.3H
	At 50% of Imax	13.1V x 12.8H
	At 90% of Imax	3.8V x 4.9H
Beam Flux	Total	981.6 lumens per klm.
	To 10% of Imax	654.2 lumens per klm.
	To 50% of Imax	283.4 lumens per klm.
	To 90% of Imax	26.9 lumens per klm.
Upward LOR		0.0 %
Downward LOR		98.2 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.5V I:0.2031A P:14.19W PF:0.5796 Freq:50.00Hz Lamp Flux:1109.62x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080036
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

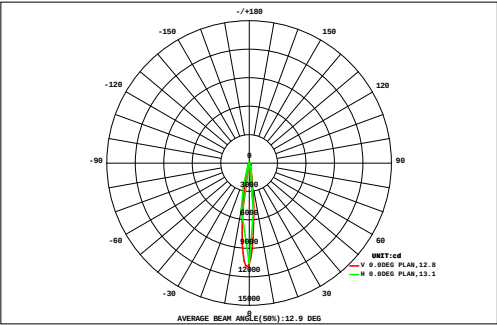

DATA OF LAMP		Eff:78.19lm/W	
MODEL:SP-PZT-R170-12P-RDM-G		Imax(cd)	10906
NOMINAL POWER(W)	14	AVAILABILITY(%)	69.3
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	769.1
NOMINAL FLUX(lm)	1109.62	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1110
TEST VOLTAGE(V)	120	θ @50%(H,V)	13,13DEG


AREA FLUX DIAGRAM																	UNIT:lm			Φ t	Φ a
27	0.29	0.34	0.40	0.46	0.53	0.61	0.68	0.76	0.81	0.84	0.83	0.79	0.72	0.64	0.55	0.47	0.40	0.34	10.5	0.00	
24	0.29	0.35	0.43	0.53	0.64	0.78	0.94	1.11	1.27	1.38	1.39	1.31	1.16	0.99	0.82	0.68	0.55	0.45	15.1	0.00	
21	0.36	0.44	0.55	0.68	0.84	1.03	1.25	1.47	1.65	1.73	1.68	1.51	1.30	1.07	0.87	0.71	0.57	0.46	18.1	0.00	
18	0.44	0.54	0.67	0.84	1.04	1.29	1.57	1.84	2.03	2.08	1.95	1.70	1.42	1.14	0.91	0.72	0.57	0.45	21.2	0.00	
15	0.38	0.48	0.62	0.82	1.13	1.65	2.62	4.39	6.89	9.12	9.50	7.59	4.95	3.01	1.89	1.27	0.90	0.66	57.8	45.0	
12	0.42	0.55	0.72	0.99	1.45	2.26	3.88	6.67	10.2	12.9	12.5	9.40	5.87	3.46	2.13	1.39	0.97	0.71	76.5	64.1	
9	0.55	0.73	0.99	1.42	2.17	3.55	6.48	10.9	15.5	17.2	14.3	9.08	5.12	2.94	1.81	1.19	0.84	0.61	95.4	83.6	
VERTICAL (DEG)	0.47	0.63	0.85	1.20	1.81	2.96	5.44	10.1	16.4	21.4	20.8	15.2	8.81	4.71	2.58	1.57	1.04	0.74	117	105	
	0.38	0.50	0.67	0.92	1.35	2.20	4.07	8.87	16.9	25.5	27.9	21.9	12.9	6.68	3.45	1.99	1.27	0.88	138	128	
	0.54	0.73	1.03	1.56	2.58	4.92	10.3	19.3	29.6	32.7	25.8	14.9	7.34	3.67	1.99	1.25	0.86	0.62	160	149	
	0.51	0.69	0.98	1.46	2.40	4.52	9.40	17.6	26.9	29.7	23.5	13.7	6.80	3.45	1.89	1.21	0.83	0.61	146	135	
	0.30	0.41	0.53	0.66	0.82	0.94	1.04	1.93	4.42	9.14	12.3	11.1	7.26	4.12	2.33	1.46	0.99	0.71	60.4	49.1	
	0.34	0.45	0.58	0.73	0.90	1.04	1.28	1.43	1.32	2.16	3.73	3.99	3.11	2.11	1.42	1.00	0.73	0.55	26.9	11.1	
	0.39	0.52	0.66	0.84	1.06	1.27	1.21	0.41	0.02	0.00	0.00	0.00	0.00	0.12	0.38	0.47	0.43	0.36	8.14	0.00	
	0.22	0.29	0.36	0.45	0.57	0.71	0.90	1.17	1.49	1.80	1.94	1.82	1.52	1.20	0.93	0.71	0.54	0.43	17.0	0.00	
	0.18	0.22	0.27	0.33	0.38	0.42	0.47	0.55	0.68	0.90	1.10	1.14	1.03	0.87	0.70	0.56	0.44	0.35	10.6	0.00	
	0.21	0.24	0.28	0.35	0.39	0.41	0.40	0.33	0.22	0.16	0.13	0.15	0.18	0.23	0.25	0.23	0.21	0.19	4.55	0.00	
0.16	0.18	0.21	0.25	0.29	0.31	0.31	0.29	0.31	0.33	0.33	0.32	0.30	0.27	0.26	0.24	0.21	0.19	4.75	0.00		
-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)					6	9	12	15	18	21	24	27	
Φ t	6.42	8.29	10.8	14.5	20.3	30.9	52.2	89.1	137	169	160	116	69.8	40.7	25.2	17.1	12.4	9.31	988	---	
Φ a	0.00	0.00	0.00	0.00	1.83	14.1	39.1	79.1	126	159	150	106	61.4	28.9	3.96	0.00	0.00	0.00	---	769	

one-half-peak spread: U:4.9,D:8.5 , L:6.2,R:6NEMA Beam Type: Type 2 x 3 (H x V)

H(β) Range:-90 - 90DEG	V(B) Range:-80 - 80DEG
H(β) Interval: 1.0DEG	V(B) Interval: 5.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Temperature:28.0DEG	Humidity:83%
Operators:QC1	Test Distance:8.300m [K=1.0000]
Test Date:2025-08-05	Remarks:

ISOCANDELA DIAGRAM

Test:U:120.5V I:0.2031A P:14.19W PF:0.5796 Freq:50.00Hz Lamp Flux:1109.62x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080036
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

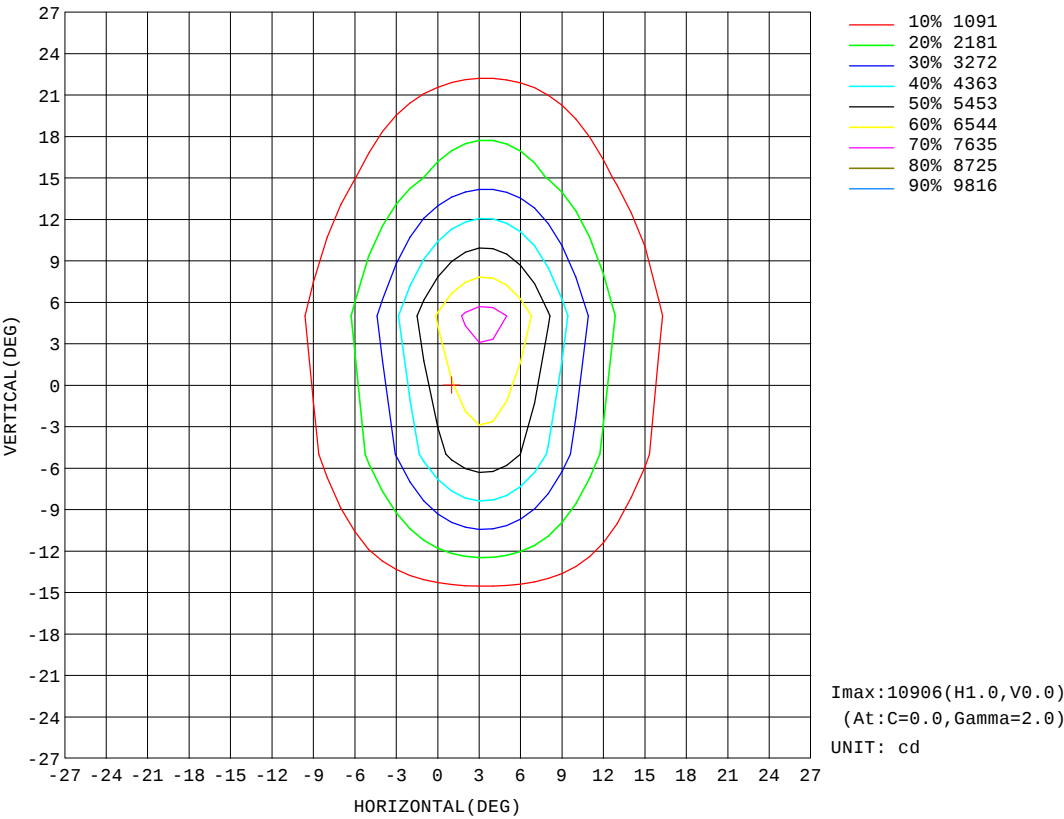


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:120.5V I:0.2031A P:14.19W PF:0.5796 Freq:50.00Hz Lamp Flux:1109.62x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080036
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

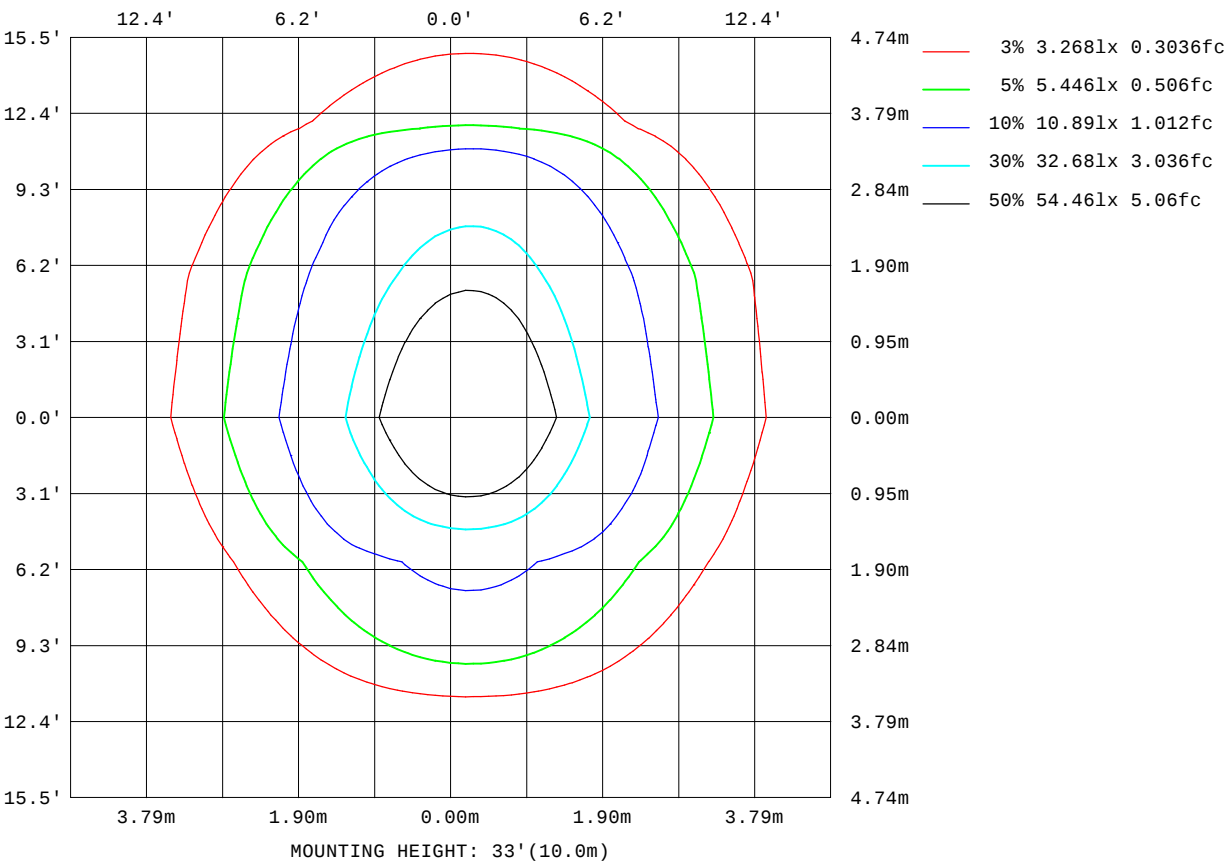

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

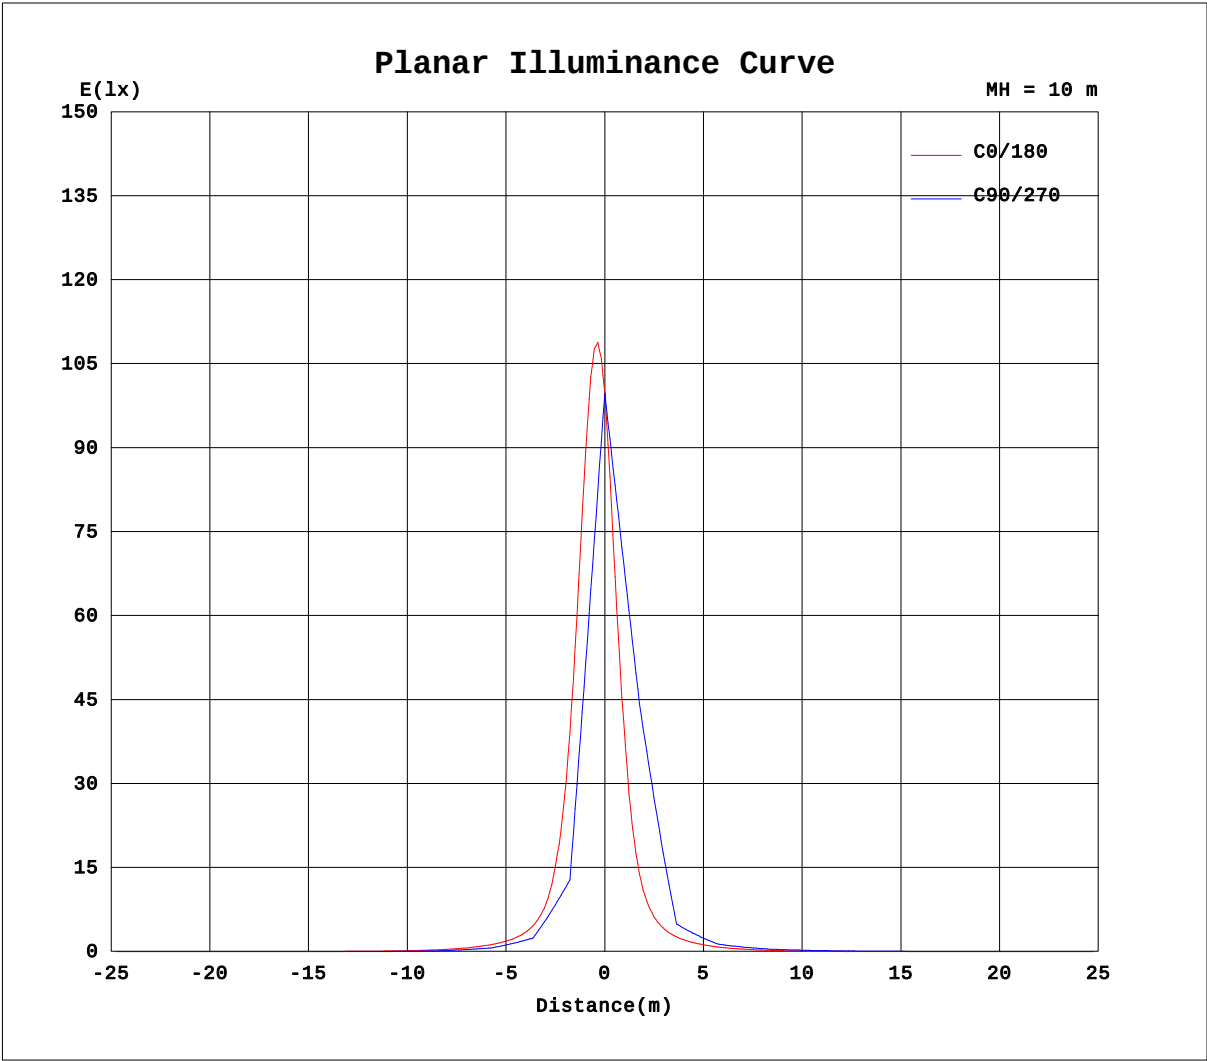


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.5V I:0.2031A P:14.19W PF:0.5796 Freq:50.00Hz Lamp Flux:1109.62x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080036
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

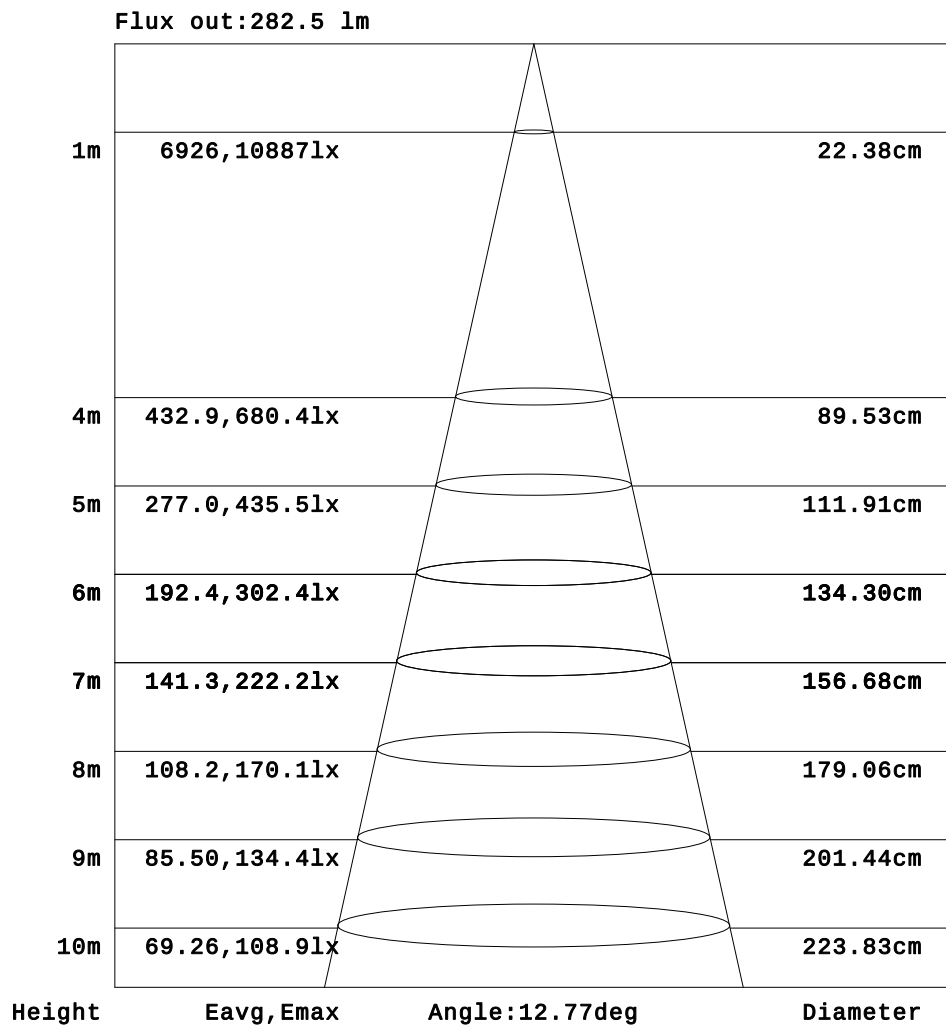

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.5V I:0.2031A P:14.19W PF:0.5796 Freq:50.00Hz Lamp Flux:1109.62x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080036
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1		UNIT: ×10cd																	
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.29	0.39	0.43
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.38	0.69	0.82	0.85
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.36	0.64	0.87	1.15	1.49	1.85	2.09	2.23
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.35	0.98	1.47	1.97	2.48	2.89	3.25	3.49	3.66
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.42	0.82	1.47	2.23	3.03	3.88	4.69	5.47	6.32	6.88
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.36	1.13	1.79	2.55	3.66	4.77	5.94	7.12	8.31	9.75	10.3
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.53	1.28	2.09	3.12	4.60	6.32	8.30	11.0	13.9	17.2	19.5
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.39	1.25	2.07	3.12	4.80	6.91	9.37	12.5	17.1	21.9	27.0	29.7
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.33	1.22	2.16	3.33	5.10	7.52	10.8	16.1	23.5	35.5	55.2	78.5
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.96	1.88	3.11	4.72	7.26	10.4	16.3	24.7	38.1	62.7	103	139
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.77	1.74	2.88	4.41	6.98	10.4	15.8	24.9	41.5	84.1	230	517
0	0.00	0.00	0.00	0.00	0.00	0.00	0.35	1.36	2.43	3.76	5.77	9.26	14.2	21.7	35.6	68.7	182	560	1061
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.99	2.02	3.21	4.93	7.86	11.9	18.0	27.6	47.3	101	289	665
10	0.00	0.00	0.00	0.00	0.00	0.00	0.42	1.42	2.48	3.82	6.07	9.35	14.0	20.6	31.9	55.3	117	287	491
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.96	1.94	3.11	4.81	7.42	11.1	15.6	22.5	34.4	59.8	125	242
20	0.00	0.00	0.00	0.00	0.00	0.00	0.33	1.26	2.26	3.61	5.33	8.18	11.4	15.4	20.9	28.8	39.8	52.2	60.7
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.67	1.59	2.69	4.05	5.94	8.60	11.4	14.9	19.6	25.8	33.0	39.4
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.80	1.72	2.84	4.03	5.90	7.94	10.0	12.4	14.9	17.4	19.5	20.6
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.23	1.00	1.97	2.98	4.15	5.84	7.44	9.11	10.9	12.6	14.1	15.2
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.23	0.99	1.91	2.76	3.76	5.03	6.16	7.25	8.27	9.15	9.81	10.1
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.33	1.02	1.79	2.55	3.50	4.45	5.31	6.09	6.78	7.32	7.65
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.77	1.42	2.04	2.76	3.45	4.02	4.49	4.88	5.15	5.30
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.24	0.58	1.08	1.63	2.22	2.74	3.18	3.53	3.78	3.94
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.53	0.97	1.43	1.83	2.17	2.40	2.56	2.64
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.18	0.39	0.63	0.83	1.05	1.29	1.46	1.56
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	0.33	0.47	0.53
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.13	0.21	0.26
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.5V I:0.2031A P:14.19W PF:0.5796 Freq:50.00Hz Lamp Flux:1109.62x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080036
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: ×10cd		
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.41	0.35	0.30	0.23	0.15	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.77	0.66	0.54	0.41	0.24	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	2.26	2.23	2.14	1.88	1.50	1.16	0.83	0.52	0.28	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	3.72	3.78	3.56	3.05	2.47	1.98	1.42	0.84	0.39	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-35	6.94	6.57	6.12	5.39	4.48	3.55	2.67	1.90	1.26	0.67	0.22	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-30	9.83	9.09	8.15	7.00	5.78	4.34	3.28	2.41	1.67	0.91	0.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-25	20.0	18.2	15.4	12.3	9.48	7.24	5.28	3.75	2.66	1.75	0.87	0.18	0.00	0.00	0.00	0.00	0.00	0.00	
-20	29.1	25.3	20.3	15.0	11.3	8.51	5.88	4.16	2.90	1.87	0.94	0.02	0.00	0.00	0.00	0.00	0.00	0.00	
-15	83.9	64.2	42.5	27.7	18.7	12.8	8.81	5.76	3.98	2.69	1.64	0.68	0.00	0.00	0.00	0.00	0.00	0.00	
-10	127	84.4	51.1	31.6	20.9	13.6	9.01	5.74	3.93	2.63	1.58	0.58	0.00	0.00	0.00	0.00	0.00	0.00	
-5	587	304	116	51.5	29.4	18.5	12.1	7.69	5.06	3.34	2.13	1.12	0.13	0.00	0.00	0.00	0.00	0.00	
0	855	328	108	48.6	27.8	17.7	11.3	7.15	4.62	3.02	1.85	0.84	0.00	0.00	0.00	0.00	0.00	0.00	
5	763	391	142	59.6	32.5	20.4	13.6	8.82	5.64	3.73	2.35	1.26	0.31	0.00	0.00	0.00	0.00	0.00	
10	422	194	82.8	42.8	25.8	16.9	11.7	7.37	4.92	3.21	1.94	0.89	0.00	0.00	0.00	0.00	0.00	0.00	
15	276	164	76.7	41.4	25.7	17.3	12.2	8.38	5.38	3.68	2.30	1.18	0.28	0.00	0.00	0.00	0.00	0.00	
20	58.0	46.6	34.4	24.7	17.9	13.1	9.59	6.45	4.35	2.96	1.71	0.70	0.00	0.00	0.00	0.00	0.00	0.00	
25	40.5	35.6	28.2	21.6	16.4	12.4	9.35	6.74	4.51	3.15	1.97	0.91	0.11	0.00	0.00	0.00	0.00	0.00	
30	20.3	18.8	16.5	13.9	11.4	9.08	7.04	4.99	3.48	2.40	1.31	0.41	0.00	0.00	0.00	0.00	0.00	0.00	
35	15.4	14.7	13.4	11.7	9.88	8.12	6.45	4.80	3.38	2.35	1.39	0.48	0.00	0.00	0.00	0.00	0.00	0.00	
40	10.1	9.66	8.94	8.01	6.94	5.79	4.56	3.41	2.41	1.54	0.68	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
45	7.73	7.55	7.12	6.52	5.79	4.94	4.01	3.05	2.14	1.38	0.65	0.12	0.00	0.00	0.00	0.00	0.00	0.00	
50	5.30	5.14	4.86	4.47	3.99	3.37	2.67	1.94	1.26	0.64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
55	3.98	3.92	3.73	3.46	3.09	2.62	2.07	1.48	0.90	0.44	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	2.65	2.57	2.41	2.18	1.84	1.44	1.01	0.54	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	1.59	1.56	1.45	1.28	1.05	0.80	0.60	0.36	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.52	0.48	0.37	0.21	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.27	0.25	0.21	0.14	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: