

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		9835.3 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	29.7V x 27.6H
	At 50% of Imax	14.3V x 13.5H
	At 90% of Imax	3.8V x 5.3H
Beam Flux	Total	980.7 lumens per klm.
	To 10% of Imax	687.3 lumens per klm.
	To 50% of Imax	309.5 lumens per klm.
	To 90% of Imax	30.7 lumens per klm.
Upward LOR		0.0 %
Downward LOR		98.1 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.6V I:0.1606A P:10.94W PF:0.5646 Freq:50.00Hz Lamp Flux:609.835x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080035
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

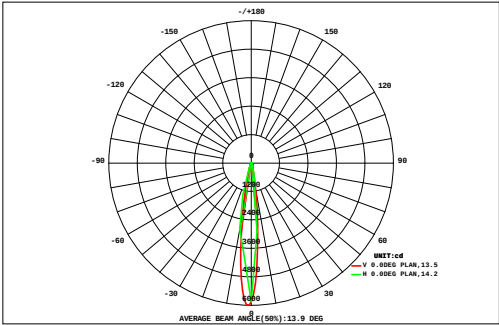

DATA OF LAMP		Eff:55.76lm/W	
MODEL:SP-PZT-R170-12P-RDM-R		Imax(cd)	5998
NOMINAL POWER(W)	11	AVAILABILITY(%)	72.7
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	443.6
NOMINAL FLUX(lm)	609.835	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	609.8
TEST VOLTAGE(V)	120	θ @50%(H,V)	14,14DEG


VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.14	0.17	0.20	0.23	0.27	0.31	0.35	0.39	0.42	0.44	0.44	0.41	0.37	0.33	0.28	0.24	0.20	0.17	5.35	0.00
27	0.14	0.17	0.21	0.27	0.33	0.41	0.49	0.59	0.68	0.74	0.75	0.71	0.62	0.52	0.43	0.35	0.28	0.23	7.92	0.00
24	0.18	0.22	0.28	0.35	0.44	0.54	0.66	0.79	0.89	0.93	0.91	0.82	0.70	0.57	0.46	0.36	0.29	0.23	9.61	0.00
21	0.22	0.27	0.34	0.44	0.55	0.69	0.84	0.99	1.10	1.13	1.07	0.93	0.77	0.61	0.48	0.37	0.29	0.23	11.3	0.00
18	0.18	0.24	0.32	0.43	0.61	0.90	1.46	2.48	3.94	5.23	5.47	4.48	2.97	1.75	1.06	0.69	0.48	0.35	33.0	26.3
15	0.21	0.27	0.37	0.53	0.79	1.26	2.19	3.81	5.89	7.40	7.28	5.62	3.55	2.02	1.20	0.76	0.52	0.37	44.0	37.7
12	0.27	0.37	0.53	0.77	1.20	2.02	3.67	6.27	8.96	9.94	8.43	5.57	3.07	1.68	1.01	0.64	0.44	0.32	55.2	49.0
9	0.24	0.32	0.44	0.64	0.99	1.66	3.10	5.78	9.42	12.1	11.8	8.94	5.38	2.81	1.48	0.87	0.56	0.39	66.9	60.8
	0.19	0.25	0.34	0.48	0.73	1.19	2.35	5.02	9.66	14.1	15.4	12.6	7.94	4.08	2.00	1.13	0.69	0.47	78.7	73.1
	0.28	0.38	0.54	0.85	1.42	2.79	5.91	11.1	16.4	17.9	14.7	9.14	4.59	2.08	1.12	0.68	0.46	0.32	90.7	84.9
	0.26	0.36	0.51	0.79	1.32	2.56	5.39	10.1	14.9	16.3	13.4	8.35	4.23	1.96	1.06	0.66	0.45	0.32	82.9	77.0
	0.15	0.20	0.27	0.33	0.44	0.48	0.57	1.07	2.67	5.14	6.69	6.23	4.35	2.52	1.33	0.81	0.53	0.38	34.2	28.5
	0.17	0.23	0.29	0.38	0.48	0.57	0.70	0.80	0.79	1.31	2.02	2.19	1.78	1.23	0.78	0.54	0.39	0.29	14.9	6.41
	0.20	0.26	0.34	0.45	0.57	0.70	0.63	0.22	0.01	0.00	0.00	0.00	0.00	0.04	0.17	0.23	0.22	0.18	4.21	0.00
	0.11	0.15	0.19	0.23	0.30	0.38	0.49	0.63	0.81	1.01	1.10	1.03	0.85	0.67	0.50	0.38	0.29	0.23	9.35	0.00
	0.09	0.12	0.14	0.17	0.20	0.22	0.24	0.28	0.34	0.47	0.60	0.63	0.57	0.48	0.38	0.30	0.24	0.19	5.65	0.00
	0.11	0.13	0.16	0.18	0.20	0.21	0.20	0.16	0.10	0.06	0.05	0.06	0.08	0.10	0.12	0.12	0.11	0.10	2.27	0.00
	0.08	0.09	0.11	0.13	0.15	0.16	0.16	0.15	0.16	0.17	0.17	0.17	0.16	0.14	0.13	0.12	0.11	0.10	2.48	0.00
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)	6	9	12	15	18	21	24	27			
Φ t	3.20	4.21	5.59	7.64	11.0	17.0	29.4	50.6	77.2	94.4	90.3	67.9	42.0	23.6	14.0	9.24	6.54	4.84	559	---
Φ a	0.00	0.00	0.00	0.00	1.01	8.07	22.5	45.3	71.8	88.7	84.8	62.8	37.5	18.1	3.20	0.00	0.00	0.00	---	444

one-half-peak spread: U:5.0,D:9.5 , L:6.4,R:7.7,EMA Beam Type: Type 2 x 3 (H x V)

H(β) Range:-90 - 90DEG H(β) Interval: 1.0DEG Test Speed: HIGH Temperature:28.0DEG Operators:QC1 Test Date:2025-08-05	V(B) Range:-80 - 80DEG V(B) Interval: 5.0DEG Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354 Humidity:83% Test Distance:8.300m [K=1.0000] Remarks:
--	---

ISOCANDELA DIAGRAM

Test:U:120.6V I:0.1606A P:10.94W PF:0.5646 Freq:50.00Hz Lamp Flux:609.835x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080035
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

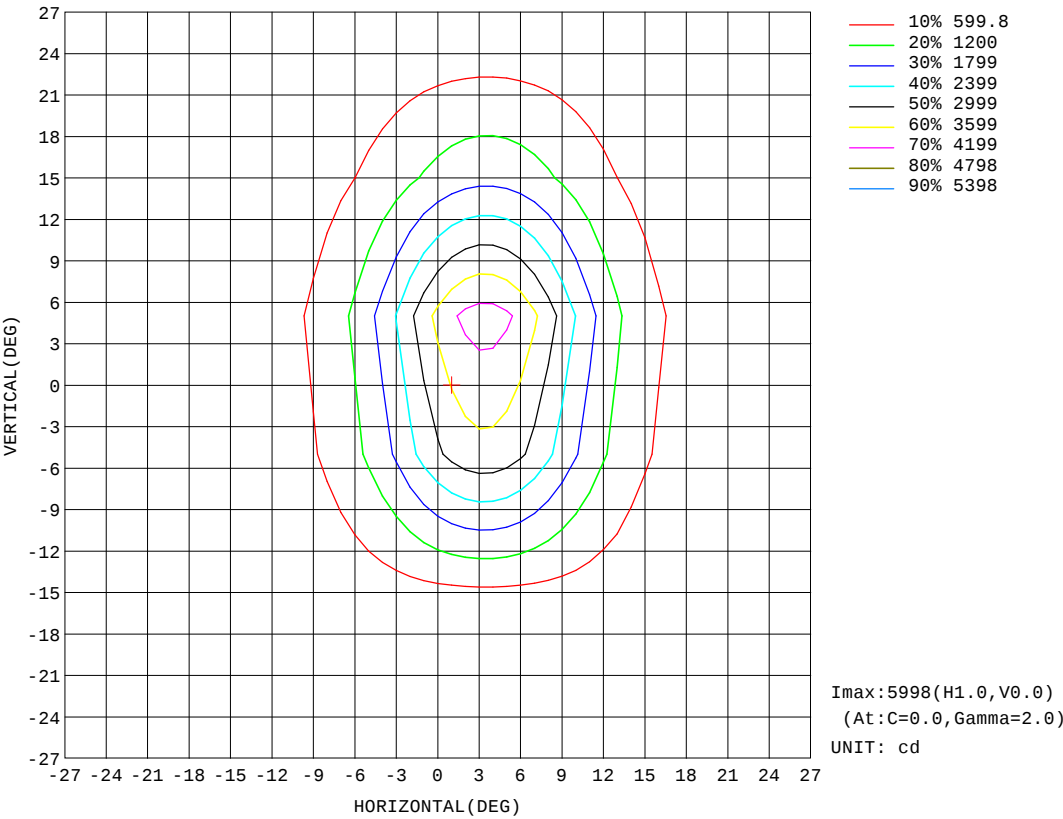


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:120.6V I:0.1606A P:10.94W PF:0.5646 Freq:50.00Hz Lamp Flux:609.835x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080035
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

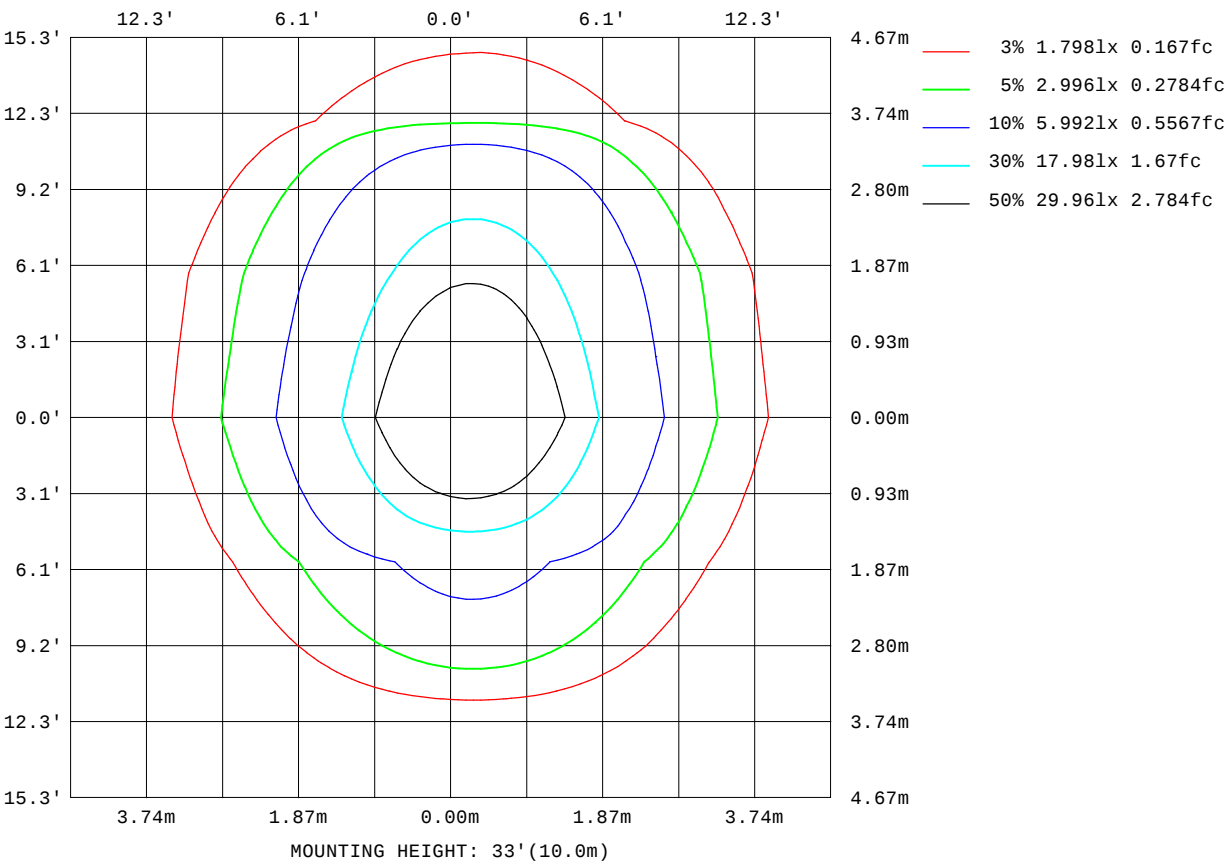

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

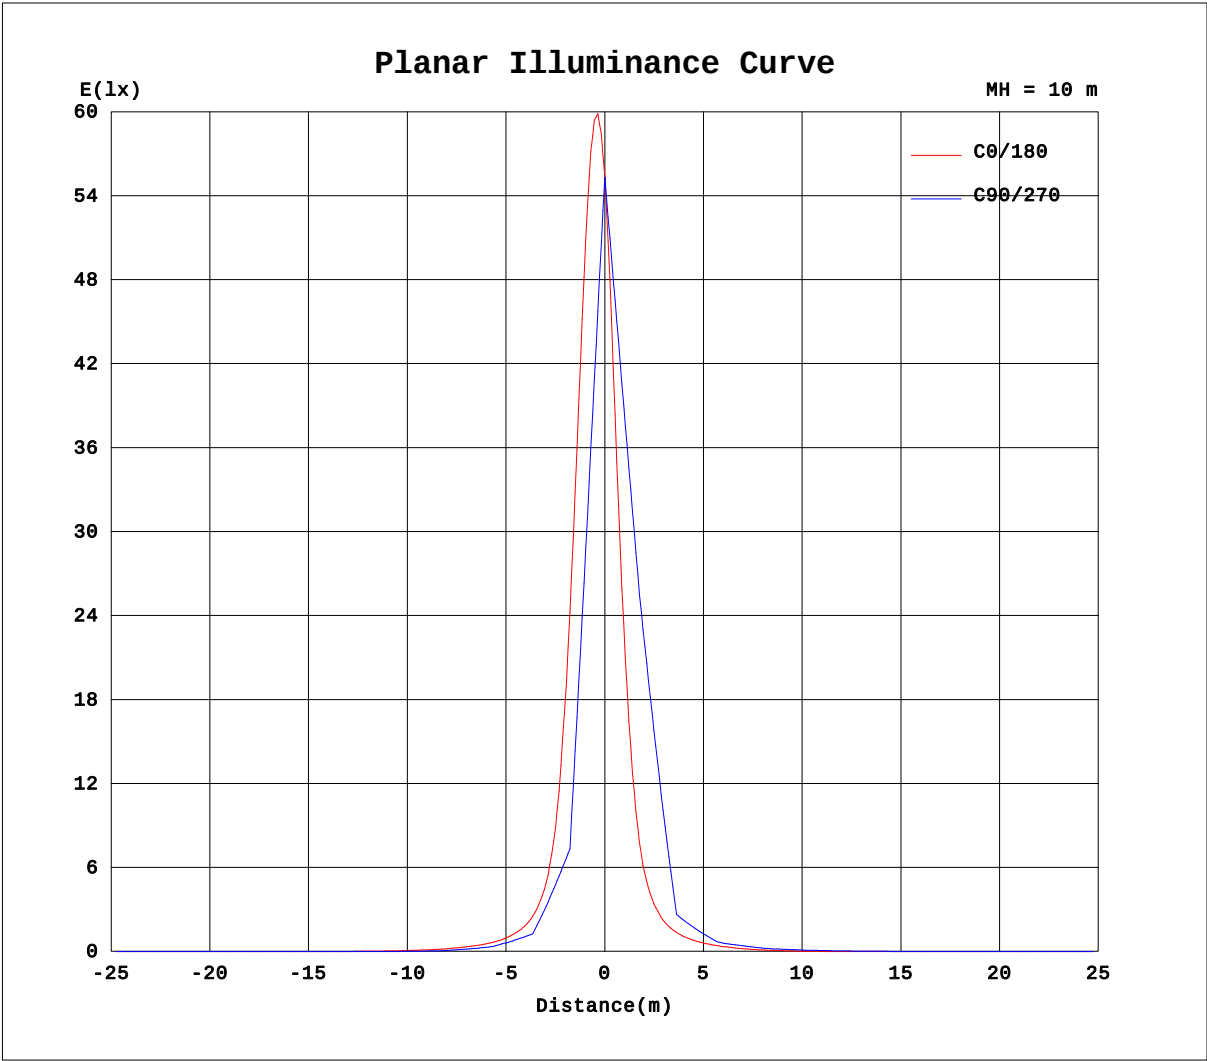


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.6V I:0.1606A P:10.94W PF:0.5646 Freq:50.00Hz Lamp Flux:609.835x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080035
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

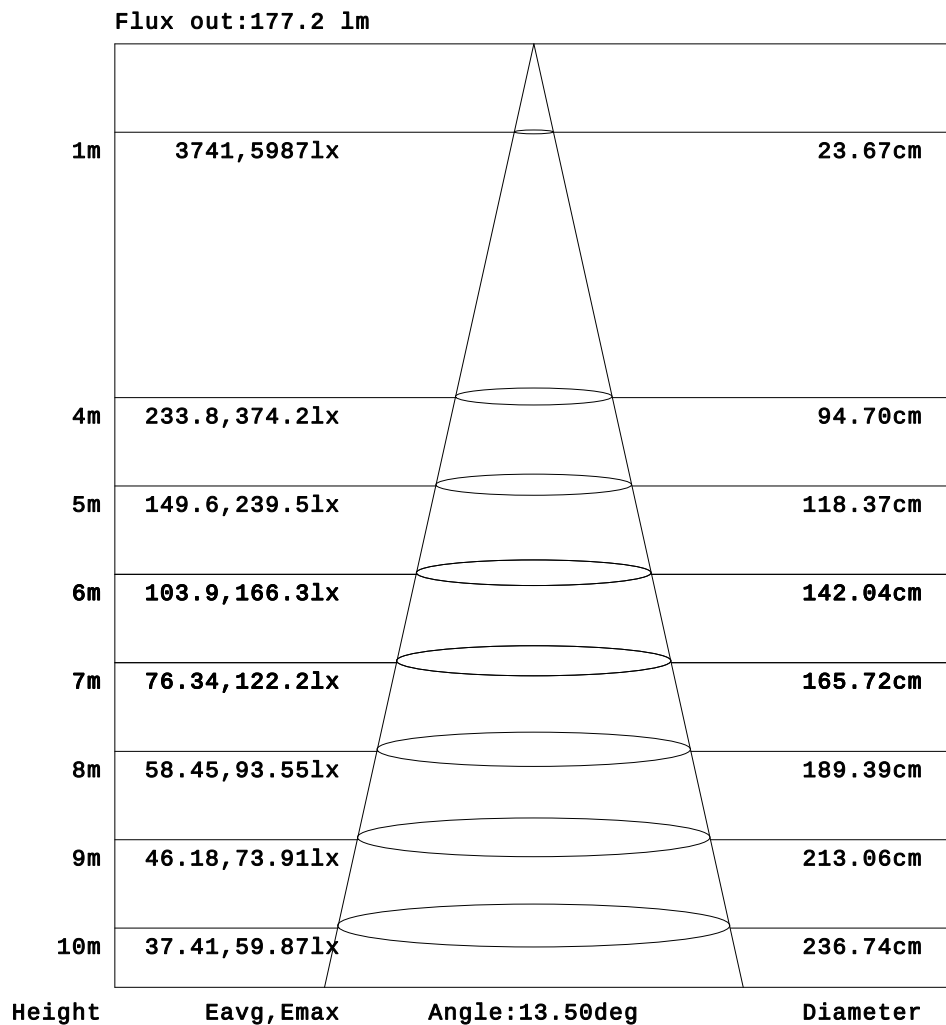

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.6V I:0.1606A P:10.94W PF:0.5646 Freq:50.00Hz Lamp Flux:609.835x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080035
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.03	2.58	4.07	5.43	6.57	7.37
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.31	3.31	6.37	9.27	11.8	13.8	15.2
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.33	2.67	5.70	10.3	15.6	21.0	26.1	30.9	34.1
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.42	7.61	14.3	21.5	29.2	36.9	44.3	51.0	54.1
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.66	3.90	10.4	19.5	30.5	42.7	57.2	73.3	90.7	103
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.47	10.1	19.9	33.3	48.9	66.9	90.0	116	142	157
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.18	11.6	21.8	36.0	55.2	83.1	124	192	303	440
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.92	10.4	20.4	34.2	52.4	82.3	127	204	346	575	799
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.35	8.50	17.9	31.6	51.1	79.9	128	221	465	1298	2906
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.39	13.5	25.0	43.9	69.9	110	186	375	1036	3197	5845
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.67	9.76	20.2	35.5	57.7	89.3	142	253	560	1640	3766
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.22	13.0	26.6	43.3	68.0	103	167	301	660	1645	2831
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.88	8.64	19.1	32.6	51.9	76.3	114	182	326	705	1382
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.43	11.9	21.9	35.9	53.5	75.4	106	150	210	280	327
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.55	6.03	14.4	24.2	38.4	53.8	73.2	99.0	133	173	208
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	7.23	14.0	23.8	34.8	46.5	59.6	73.4	87.0	98.2	104
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.18	7.80	14.2	23.4	32.3	41.7	51.5	61.1	69.5	75.0
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.61	6.34	12.0	19.1	25.4	31.6	37.4	42.4	46.0	47.9
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.22	5.03	10.5	15.8	20.7	25.2	29.1	32.2	34.0
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.01	6.35	10.1	13.5	16.2	18.4	20.1	20.9
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.31	2.32	4.33	6.11	8.63	10.6	12.1	13.0
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.90	2.83	4.14	5.01	5.45	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.08	1.83	2.36	2.67	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.6V I:0.1606A P:10.94W PF:0.5646 Freq:50.00Hz Lamp Flux:609.835x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080035
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	7.83	7.90	7.52	6.26	4.21	2.76	1.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	15.8	15.7	14.3	10.7	7.25	4.38	1.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	34.4	32.5	30.1	25.8	20.1	14.6	9.19	4.95	2.32	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	51.3	47.9	42.9	36.2	28.9	20.0	13.4	7.71	2.74	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	105	96.3	81.6	64.8	49.9	37.1	25.5	16.3	9.11	3.14	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	154	134	107	80.4	60.6	44.4	29.5	18.8	10.5	3.71	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	480	364	234	148	98.5	67.2	45.6	29.0	17.6	9.00	2.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	736	480	279	169	109	71.0	47.0	29.1	17.4	8.45	1.42	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	3281	1841	661	282	155	95.7	62.4	39.5	24.2	13.2	5.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	4900	2027	620	266	145	89.6	57.6	36.1	21.4	10.8	3.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	4303	2387	816	328	173	104	68.2	44.0	27.0	15.0	6.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	2482	1171	467	229	134	85.7	57.5	36.4	22.1	11.4	3.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	1588	978	434	221	133	87.5	59.9	39.9	24.7	14.0	5.41	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	315	251	181	126	89.6	64.3	45.3	29.8	17.9	9.20	1.65	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	217	189	147	110	81.2	60.1	43.7	30.1	18.6	10.2	3.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	103	94.5	82.0	68.2	54.6	41.9	30.7	20.5	12.0	5.33	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	76.1	72.4	65.1	55.9	46.1	36.3	27.2	18.9	11.2	5.00	0.76	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	47.6	45.1	41.0	35.7	29.7	23.3	16.9	10.9	5.18	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	34.4	33.3	30.8	27.4	23.2	18.5	13.6	8.57	3.65	1.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	20.7	19.8	18.1	15.8	13.1	9.77	6.14	2.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	13.2	12.8	11.7	10.1	8.03	5.58	3.80	1.91	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	5.50	5.03	4.17	2.87	1.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	2.76	2.63	2.27	1.72	0.93	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: