

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		9013.0 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	30.0V x 28.1H
	At 50% of Imax	15.1V x 13.8H
	At 90% of Imax	3.9V x 5.4H
Beam Flux	Total	982.9 lumens per klm.
	To 10% of Imax	648.0 lumens per klm.
	To 50% of Imax	295.4 lumens per klm.
	To 90% of Imax	30.1 lumens per klm.
Upward LOR		0.0 %
Downward LOR		98.3 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.7V I:0.2082A P:14.55W PF:0.5795 Freq:50.00Hz Lamp Flux:1086.36x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080038
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

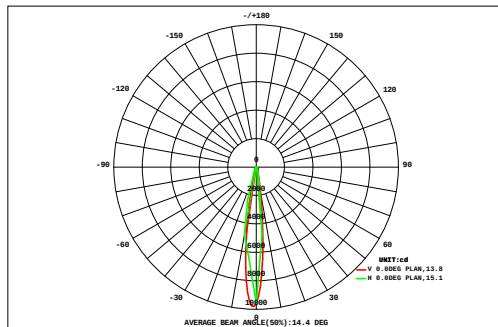

DATA OF LAMP		Eff:74.65lm/W	
MODEL-PZT-R170-12P-RDM-W		Imax(cd)	9791
NOMINAL POWER(W)	14	AVAILABILITY(%)	68.2
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	740.8
NOMINAL FLUX(lm)	1086.36	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1086
TEST VOLTAGE(V)	120	θ @50%(H,V)	14,15DEG

		AREA FLUX DIAGRAM															UNIT:lm				Φ t	Φ a
VERTICAL (DEG)	27	0.30	0.35	0.41	0.47	0.54	0.61	0.68	0.75	0.81	0.84	0.83	0.79	0.72	0.64	0.56	0.48	0.41	0.35	10.5	0.00	
	24	0.30	0.36	0.44	0.53	0.64	0.78	0.93	1.10	1.26	1.37	1.39	1.31	1.16	0.99	0.82	0.68	0.56	0.46	15.1	0.00	
	21	0.36	0.45	0.54	0.67	0.82	1.01	1.23	1.45	1.63	1.72	1.67	1.51	1.30	1.07	0.87	0.71	0.57	0.47	18.1	0.00	
	18	0.44	0.54	0.66	0.82	1.02	1.27	1.54	1.81	2.01	2.06	1.95	1.71	1.42	1.14	0.91	0.72	0.58	0.46	21.1	0.00	
	15	0.38	0.48	0.61	0.80	1.11	1.61	2.53	4.25	6.82	8.97	9.27	7.56	5.01	3.02	1.89	1.27	0.90	0.66	57.1	45.4	
	12	0.42	0.54	0.71	0.97	1.42	2.19	3.74	6.50	10.1	12.6	12.3	9.41	5.94	3.47	2.12	1.39	0.97	0.70	75.5	64.2	
	9	0.54	0.71	0.97	1.39	2.12	3.42	6.23	10.7	15.3	16.7	14.1	9.23	5.16	2.93	1.81	1.19	0.83	0.61	94.1	83.1	
		0.47	0.62	0.83	1.17	1.75	2.83	5.19	9.81	15.9	20.1	19.6	14.8	8.93	4.72	2.56	1.56	1.03	0.73	113	102	
		0.38	0.49	0.65	0.89	1.29	2.08	3.82	8.39	16.1	23.3	25.3	20.9	13.1	6.71	3.40	1.98	1.26	0.86	131	121	
		0.53	0.71	1.00	1.49	2.43	4.56	9.79	18.7	26.9	29.2	24.1	15.1	7.42	3.59	1.97	1.24	0.85	0.62	150	140	
		0.51	0.67	0.95	1.40	2.26	4.19	8.93	16.9	24.4	26.4	21.9	13.8	6.85	3.37	1.87	1.19	0.82	0.60	137	127	
		0.33	0.42	0.52	0.65	0.81	0.92	0.96	1.82	4.61	8.45	10.9	10.2	7.28	4.12	2.29	1.44	0.98	0.70	57.4	47.3	
		0.36	0.46	0.57	0.71	0.88	1.01	1.22	1.33	1.29	2.14	3.27	3.59	3.05	2.09	1.39	0.98	0.72	0.55	25.6	10.5	
		0.40	0.51	0.64	0.81	1.02	1.24	1.15	0.37	0.00	0.00	0.00	0.00	0.00	0.10	0.37	0.46	0.43	0.37	7.89	0.00	
		0.25	0.32	0.39	0.47	0.57	0.71	0.89	1.13	1.42	1.71	1.84	1.73	1.47	1.18	0.92	0.72	0.56	0.45	16.7	0.00	
		0.22	0.26	0.31	0.36	0.40	0.44	0.49	0.55	0.66	0.86	1.05	1.09	1.01	0.86	0.71	0.58	0.47	0.38	10.7	0.00	
		0.25	0.29	0.33	0.38	0.41	0.43	0.41	0.35	0.24	0.17	0.14	0.16	0.19	0.25	0.28	0.27	0.26	0.23	5.04	0.00	
		0.19	0.22	0.26	0.29	0.32	0.34	0.34	0.32	0.32	0.34	0.34	0.33	0.31	0.29	0.29	0.28	0.25	0.23	5.28	0.00	
		-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)					6	9	12	15	18	21	24	27
Φ t	6.63	8.39	10.8	14.3	19.8	29.6	50.1	86.3	130	157	150	113	70.3	40.6	25.0	17.1	12.4	9.43	951	---		
Φ a	0.00	0.00	0.00	0.00	2.62	14.2	37.9	76.5	120	147	140	104	62.1	30.7	6.62	0.00	0.00	0.00	---	741		


one-half-peak spread: U:5.0,D:10.2 , L:6.6,R:7.0 NEMA Beam Type: Type 2 x 3 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.7V I:0.2082A P:14.55W PF:0.5795 Freq:50.00Hz Lamp Flux:1086.36x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080038
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

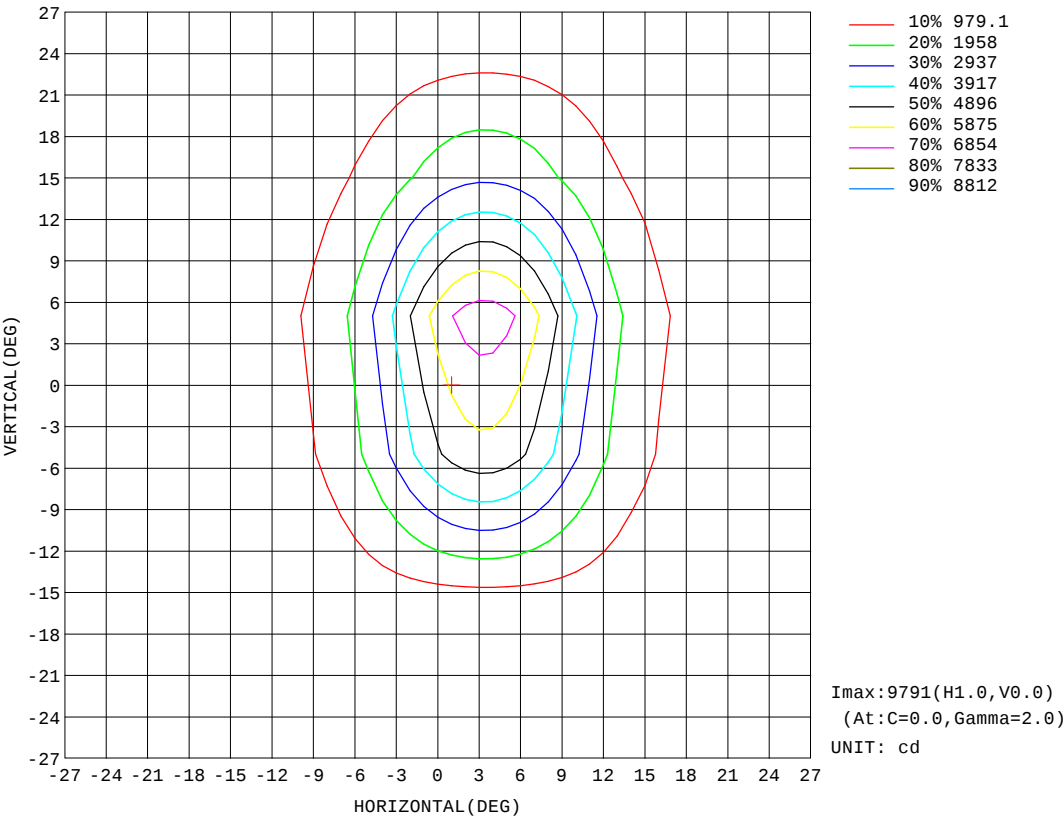


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:120.7V I:0.2082A P:14.55W PF:0.5795 Freq:50.00Hz Lamp Flux:1086.36x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080038
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

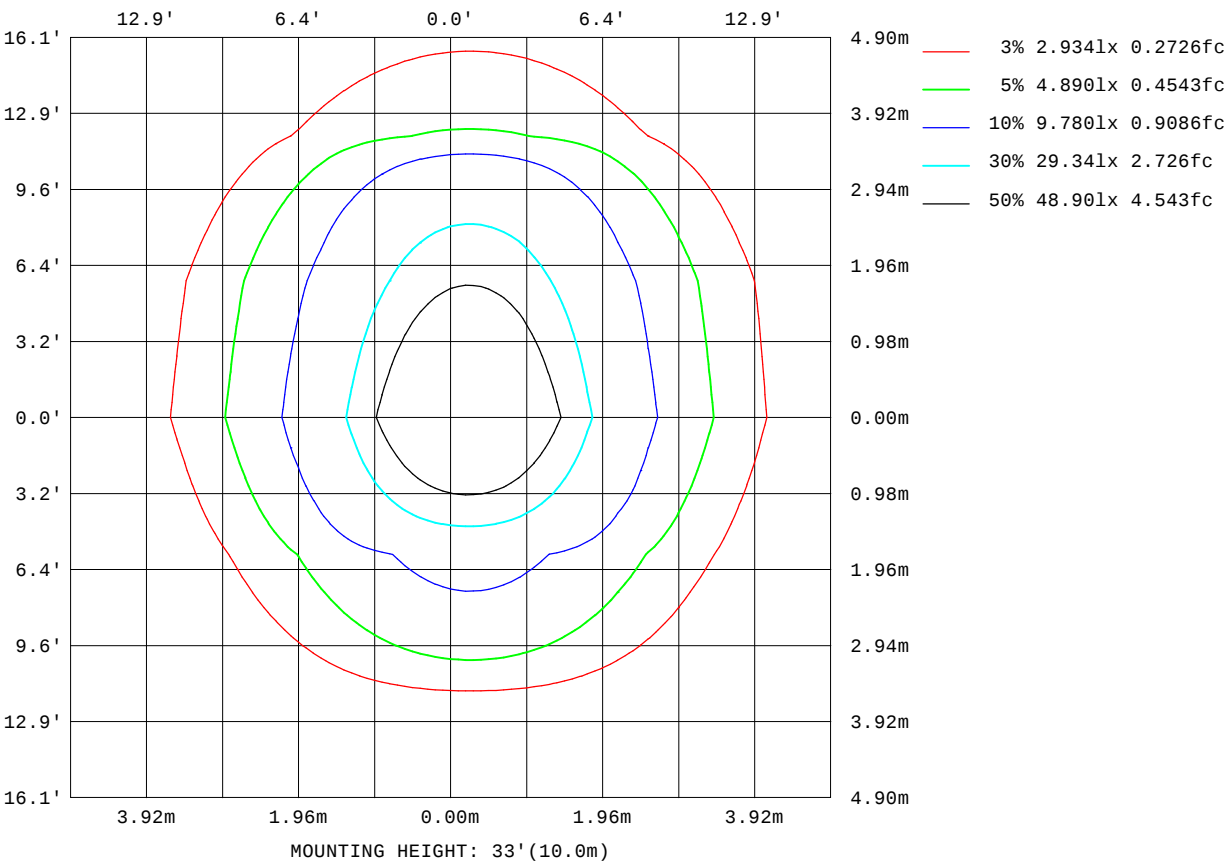

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

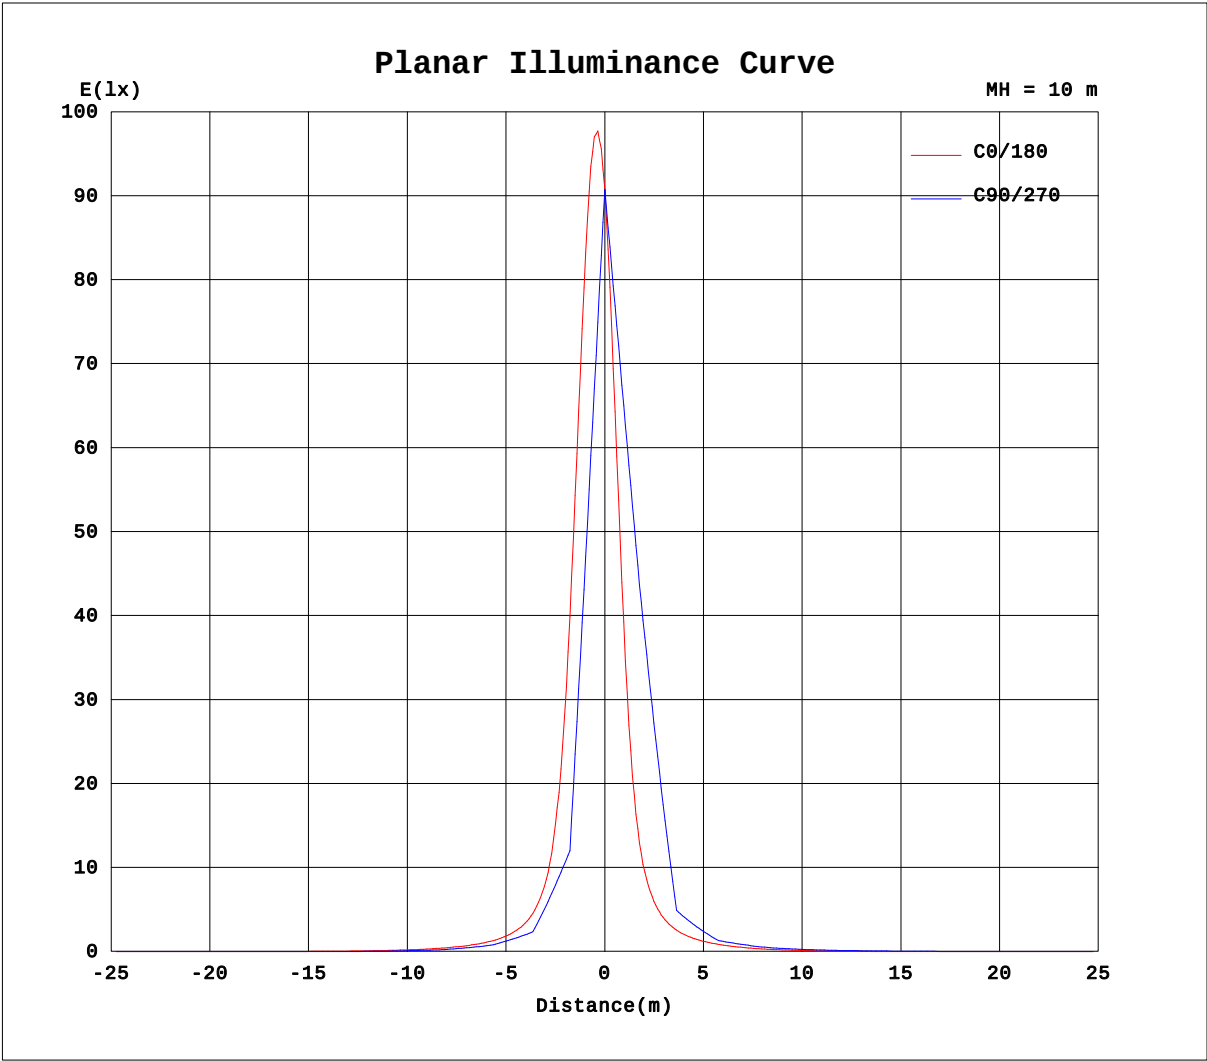


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.7V I:0.2082A P:14.55W PF:0.5795 Freq:50.00Hz Lamp Flux:1086.36x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080038
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

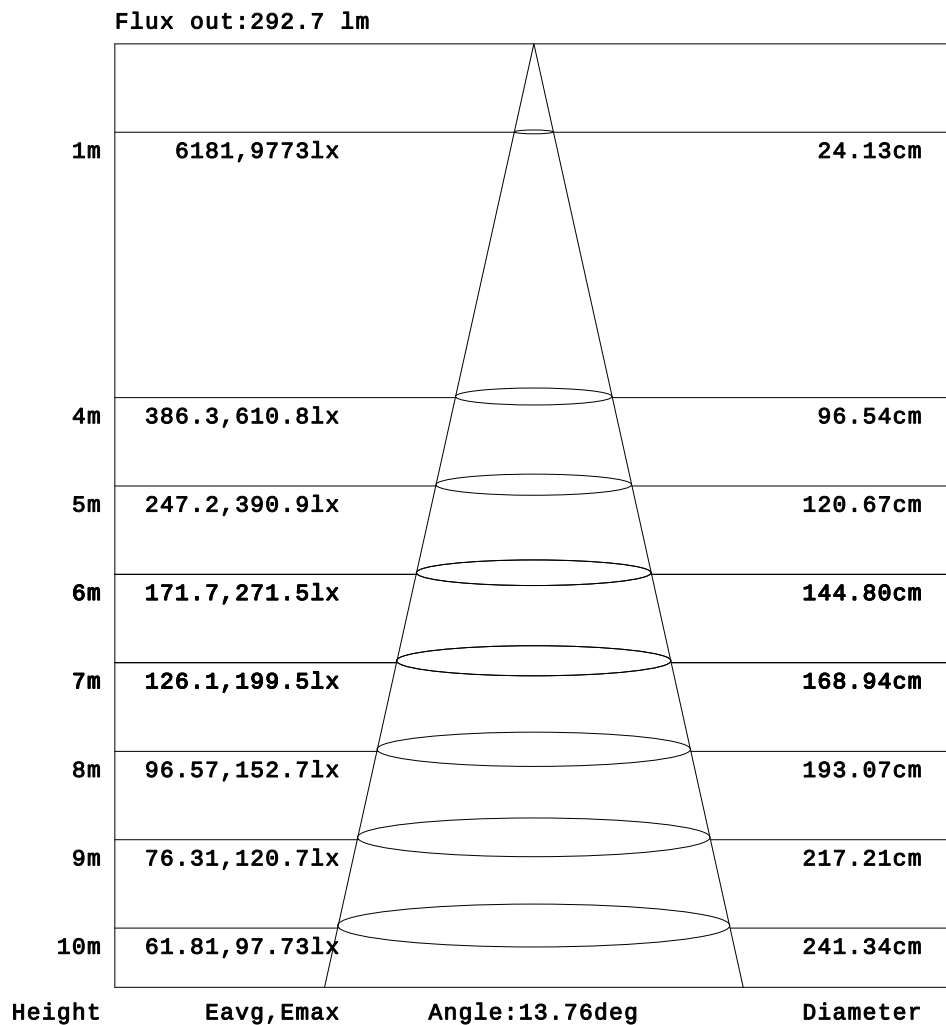

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.7V I:0.2082A P:14.55W PF:0.5795 Freq:50.00Hz Lamp Flux:1086.36x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080038
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																		UNIT: cd	
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.03	2.72	4.37	6.18	7.41
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	3.45	6.76	10.2	13.6
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.7V I:0.2082A P:14.55W PF:0.5795 Freq:50.00Hz Lamp Flux:1086.36x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080038
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	7.72	7.06	6.34	5.43	4.30	3.00	1.59	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	14.9	13.6	12.0	10.0	7.57	4.87	2.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	32.6	31.5	29.7	26.5	22.1	17.7	13.2	8.47	5.32	2.39	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	49.5	48.4	45.2	39.6	33.2	27.0	20.6	14.3	8.30	2.43	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	83.7	80.3	74.7	66.2	55.9	45.6	35.6	26.5	18.4	10.9	4.10	0.11	0.00	0.00	0.00	0.00	0.00	0.00
-30	116	109	97.9	84.7	70.5	56.0	43.1	32.0	22.4	13.5	4.90	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	203	189	164	135	109	85.4	65.3	48.3	34.6	23.2	12.8	3.45	0.00	0.00	0.00	0.00	0.00	0.00
-20	283	251	207	163	127	98.1	73.0	52.9	37.2	24.4	13.0	2.80	0.00	0.00	0.00	0.00	0.00	0.00
-15	796	621	419	278	193	138	100	71.3	50.4	34.4	21.3	10.0	0.97	0.00	0.00	0.00	0.00	0.00
-10	1203	819	501	313	209	145	102	71.4	49.8	33.4	20.3	8.69	0.00	0.00	0.00	0.00	0.00	0.00
-5	5361	3051	1144	509	290	188	129	89.8	62.5	42.1	26.9	14.8	3.48	0.00	0.00	0.00	0.00	0.00
0	8035	3334	1065	481	275	178	121	84.2	57.1	37.7	23.4	11.5	0.47	0.00	0.00	0.00	0.00	0.00
5	7105	3960	1411	593	322	204	140	97.7	67.7	45.7	29.0	16.3	5.42	0.00	0.00	0.00	0.00	0.00
10	4180	1963	829	427	256	171	121	84.5	58.9	39.0	24.0	12.0	1.73	0.00	0.00	0.00	0.00	0.00
15	2698	1656	768	414	257	175	126	90.5	63.5	43.9	27.8	15.2	4.91	0.00	0.00	0.00	0.00	0.00
20	579	466	344	248	183	135	100	72.4	51.2	35.0	20.9	9.69	0.35	0.00	0.00	0.00	0.00	0.00
25	405	357	283	217	167	127	97.2	72.8	52.2	36.8	23.6	11.9	2.59	0.00	0.00	0.00	0.00	0.00
30	204	189	167	142	117	94.2	73.7	55.6	40.1	27.9	16.1	6.13	0.00	0.00	0.00	0.00	0.00	0.00
35	155	149	136	119	102	84.0	67.4	52.3	38.5	27.3	16.9	6.85	0.59	0.00	0.00	0.00	0.00	0.00
40	104	99.0	91.7	82.2	71.5	60.1	48.6	37.6	27.4	18.3	8.89	0.96	0.00	0.00	0.00	0.00	0.00	0.00
45	79.8	77.7	73.3	67.1	59.6	51.2	42.3	33.3	24.3	16.4	8.40	1.93	0.00	0.00	0.00	0.00	0.00	0.00
50	55.0	53.3	50.2	46.1	41.2	35.2	28.7	21.7	14.8	8.18	1.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	41.3	40.5	38.6	35.7	32.0	27.5	22.3	16.6	10.8	5.43	1.99	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	27.4	26.5	24.9	22.6	19.4	15.7	11.4	6.70	2.34	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	16.4	16.1	15.0	13.3	11.1	8.58	6.62	4.24	2.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	5.39	4.93	3.93	2.41	0.62	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	2.72	2.59	2.20	1.52	0.67	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: