


Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)		9022.8 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	29.8V x 27.7H
	At 50% of Imax	14.2V x 13.3H
	At 90% of Imax	3.8V x 5.2H
Beam Flux	Total	983.4 lumens per klm.
	To 10% of Imax	626.2 lumens per klm.
	To 50% of Imax	276.8 lumens per klm.
	To 90% of Imax	26.9 lumens per klm.
Upward LOR		0.0 %
Downward LOR		98.3 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:277.6V I:0.2845A P:48.83W PF:0.6095 Freq:50.00Hz Lamp Flux:2950.27x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080040
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

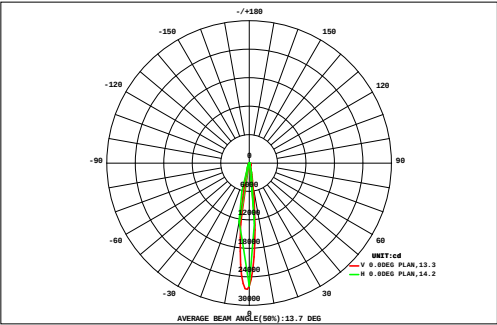

DATA OF LAMP		Eff:60.42lm/W	
MODEL	SP-PZT-R170-12P-RDM	Imax(cd)	26620
NOMINAL POWER(W)	49	AVAILABILITY(%)	66.2
RATED VOLTAGE(V)	277	Avai. FLUX(lm)	1953
NOMINAL FLUX(lm)	2950.27	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	2950
TEST VOLTAGE(V)	277	θ @50%(H,V)	13,14DEG


VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.84	0.97	1.12	1.29	1.47	1.66	1.85	2.03	2.17	2.25	2.23	2.12	1.94	1.73	1.52	1.32	1.14	0.96	28.6	0.00
27	0.84	0.97	1.12	1.29	1.47	1.66	1.85	2.03	2.17	2.25	2.23	2.12	1.94	1.73	1.52	1.32	1.14	0.96	28.6	0.00
24	0.84	1.00	1.20	1.44	1.74	2.08	2.48	2.92	3.33	3.59	3.63	3.42	3.05	2.61	2.19	1.82	1.51	1.25	40.1	0.00
21	1.02	1.23	1.49	1.82	2.22	2.70	3.25	3.81	4.26	4.47	4.35	3.94	3.39	2.83	2.32	1.89	1.54	1.27	47.8	0.00
18	1.21	1.47	1.80	2.22	2.74	3.35	4.05	4.73	5.23	5.35	5.05	4.43	3.70	3.00	2.41	1.93	1.55	1.26	55.5	0.00
15	1.04	1.30	1.66	2.16	2.96	4.29	6.67	11.2	17.7	23.3	24.2	19.6	13.0	7.88	4.91	3.32	2.38	1.79	149	117
12	1.15	1.47	1.92	2.59	3.78	5.84	9.81	17.0	26.2	32.8	32.0	24.5	15.4	9.03	5.51	3.64	2.56	1.90	197	167
9	1.47	1.92	2.58	3.64	5.64	9.15	16.2	27.8	39.7	43.8	36.7	24.0	13.5	7.54	4.70	3.13	2.22	1.66	245	216
	1.29	1.67	2.23	3.09	4.66	7.59	13.7	25.6	41.6	53.3	52.1	38.8	23.1	12.2	6.68	4.11	2.74	1.96	296	269
	1.07	1.36	1.78	2.40	3.42	5.58	10.4	22.1	42.5	62.8	68.4	55.0	33.7	17.3	8.90	5.20	3.32	2.31	348	321
	1.46	1.94	2.67	3.97	6.39	12.5	25.9	48.9	72.6	79.5	64.3	38.9	19.2	9.23	5.23	3.25	2.26	1.66	400	372
	1.39	1.85	2.53	3.73	5.94	11.5	23.6	44.4	65.9	72.2	58.5	35.5	17.7	8.66	4.97	3.14	2.21	1.63	365	338
	0.90	1.14	1.43	1.76	2.19	2.40	2.68	4.78	11.7	22.6	29.8	27.4	18.8	10.7	6.01	3.83	2.61	1.90	153	126
-9	0.98	1.24	1.55	1.92	2.37	2.61	3.22	3.58	3.39	5.59	9.03	9.78	7.97	5.48	3.67	2.63	1.95	1.50	68.5	28.2
-12	1.10	1.39	1.74	2.19	2.75	3.25	3.00	1.06	0.04	0.00	0.00	0.00	0.00	0.34	1.02	1.27	1.21	1.03	21.4	0.00
-15	0.69	0.86	1.04	1.27	1.55	1.90	2.38	3.03	3.81	4.60	4.96	4.65	3.92	3.13	2.45	1.92	1.52	1.22	44.9	0.00
-18	0.60	0.71	0.84	0.98	1.10	1.21	1.33	1.50	1.81	2.35	2.85	2.98	2.72	2.31	1.91	1.54	1.26	1.04	29.0	0.00
-21	0.67	0.77	0.89	1.03	1.13	1.18	1.16	0.99	0.69	0.48	0.41	0.46	0.57	0.72	0.78	0.74	0.69	0.63	14.0	0.00
-24	0.53	0.61	0.70	0.80	0.88	0.93	0.94	0.87	0.88	0.92	0.93	0.90	0.85	0.80	0.80	0.75	0.69	0.62	14.4	0.00
-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)	6	9	12	15	18	21	24	27			
Φ t	18.2	22.9	29.2	38.3	52.9	79.8	133	226	343	420	399	296	183	105	66.0	45.4	33.4	25.6	2518	---
Φ a	0.00	0.00	0.00	0.00	6.04	37.9	99.3	200	317	393	373	272	161	78.4	15.8	0.00	0.00	0.00	---	1953

one-half-peak spread: U:5.0,D:9.5 , L:6.4,R:7.0EMA Beam Type: Type 2 x 3 (H x V)

H(β) Range:-90 - 90DEG	V(B) Range:-80 - 80DEG
H(β) Interval: 1.0DEG	V(B) Interval: 5.0DEG
Test Speed: HIGH	Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Temperature:28.0DEG	Humidity:83%
Operators:QC1	Test Distance:8.300m [K=1.0000]
Test Date:2025-08-05	Remarks:

ISOCANDELA DIAGRAM

Test:U:277.6V I:0.2845A P:48.83W PF:0.6095 Freq:50.00Hz Lamp Flux:2950.27x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080040
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

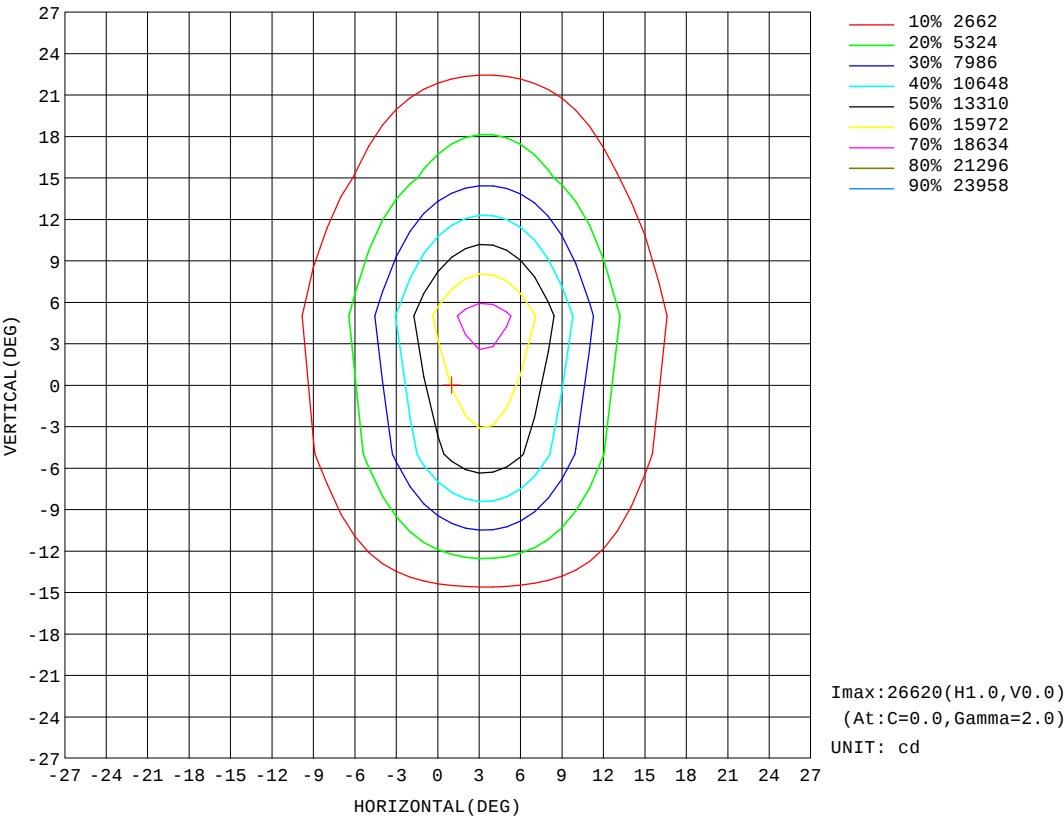


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:277.6V I:0.2845A P:48.83W PF:0.6095 Freq:50.00Hz Lamp Flux:2950.27x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080040
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

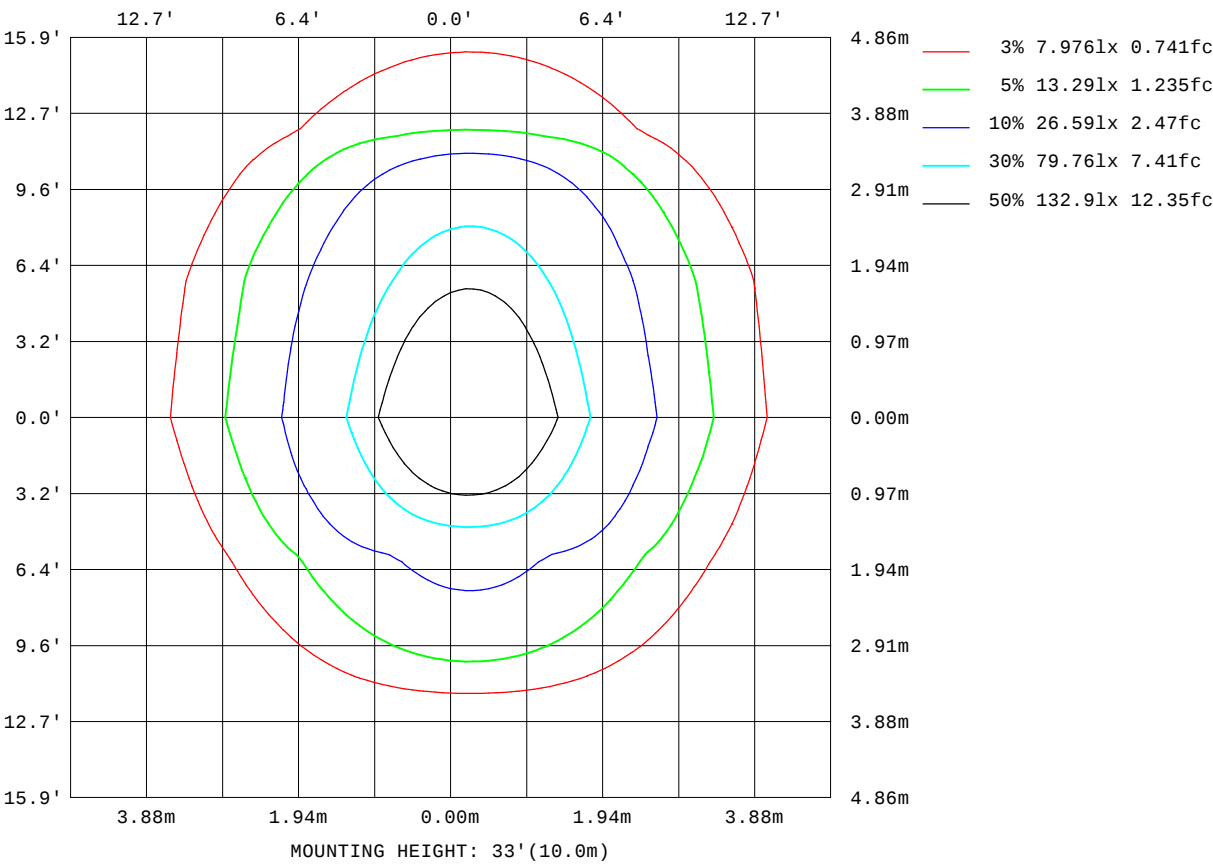

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

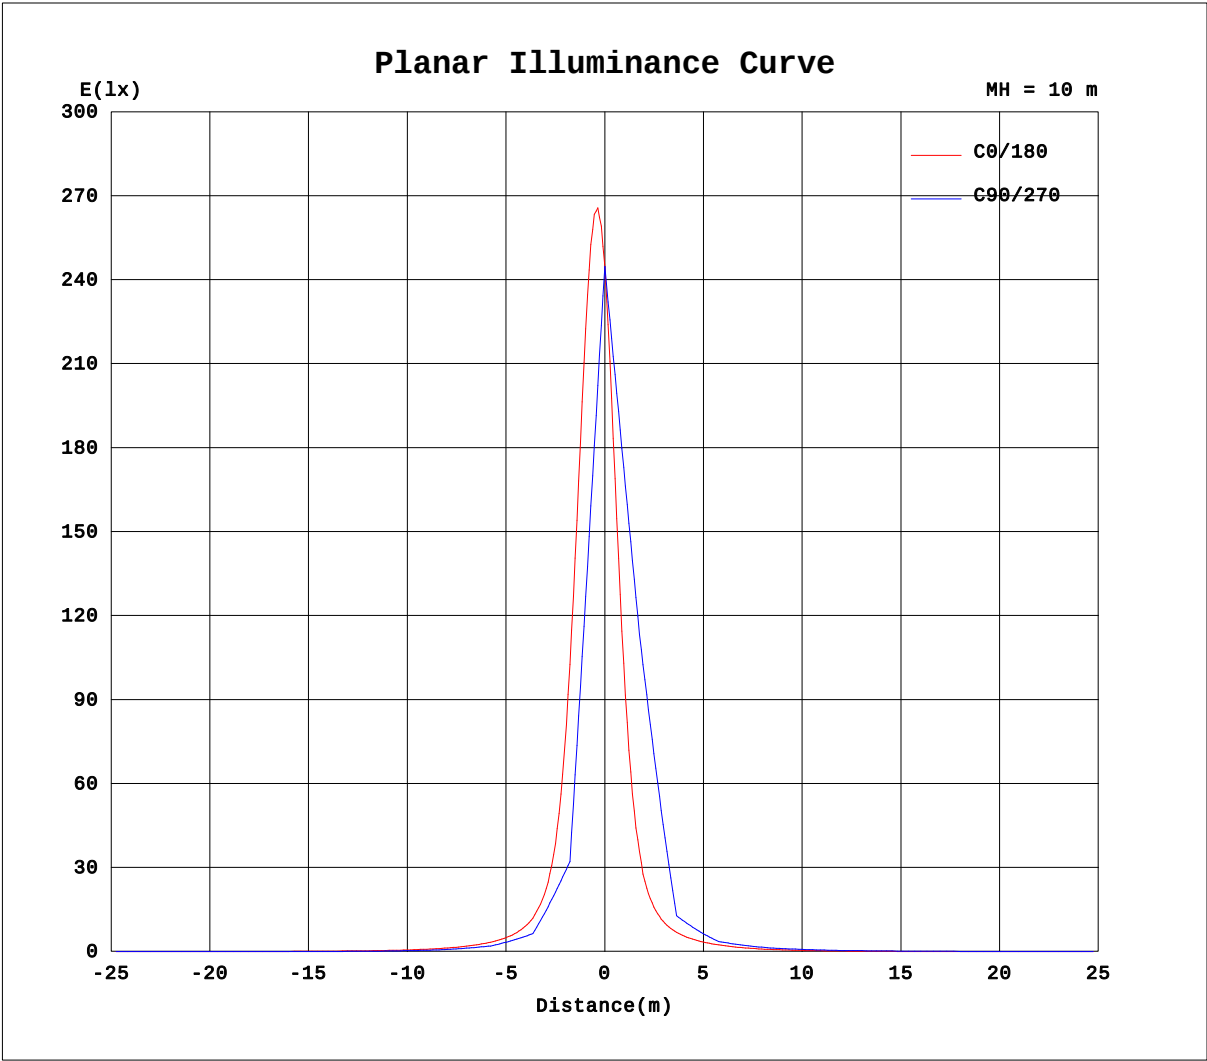


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:277.6V I:0.2845A P:48.83W PF:0.6095 Freq:50.00Hz Lamp Flux:2950.27x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080040
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

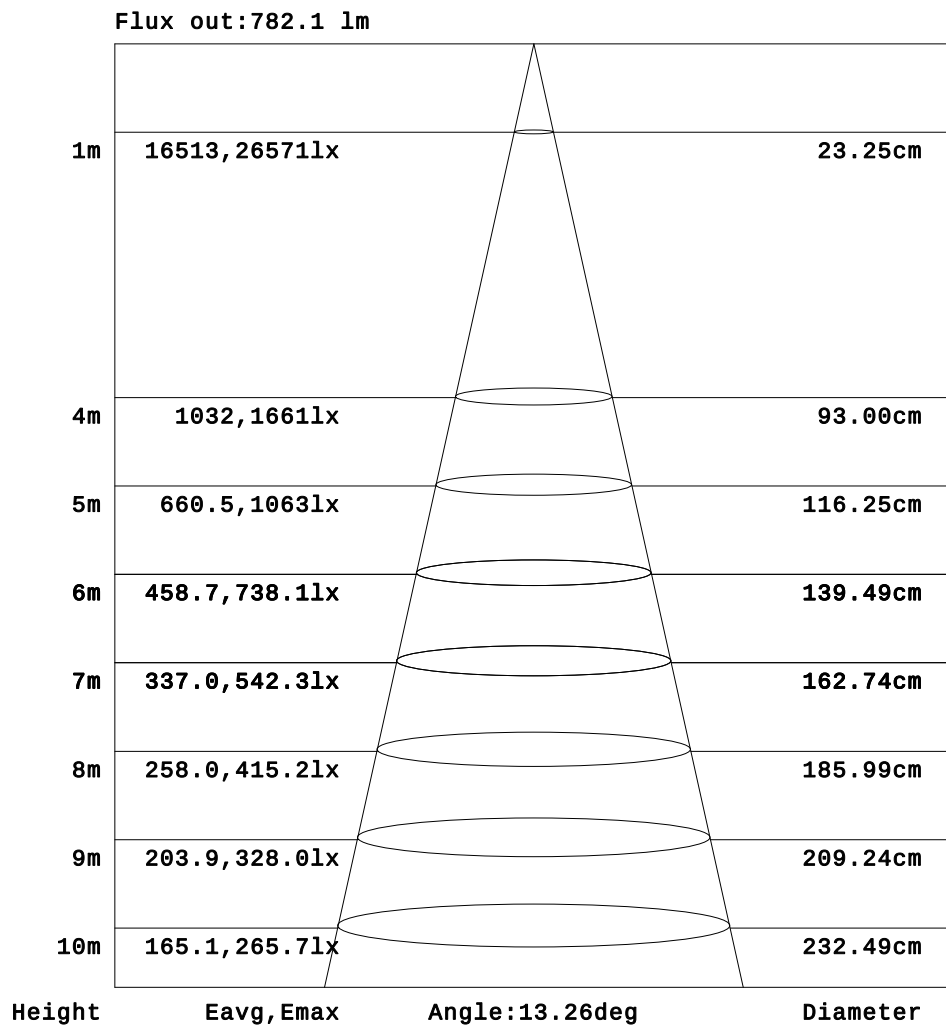

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.6V I:0.2845A P:48.83W PF:0.6095 Freq:50.00Hz Lamp Flux:2950.27x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080040
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.22	0.33	0.42
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.28	0.53	0.74	0.89
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	0.49	0.84	1.23	1.63	1.99	2.47	3.05	3.46	3.66
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.60	1.26	2.00	2.79	3.55	4.28	5.10	5.98	6.37	6.49
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	0.74	1.50	2.59	3.78	4.93	6.00	7.16	8.21	9.26	9.99	10.4
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.72	1.97	3.27	4.85	6.53	7.93	9.38	10.9	12.2	13.3	14.0	14.4
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.22	1.22	2.77	4.36	6.07	7.94	10.1	12.4	14.8	17.2	19.4	21.5	22.8
-30	0.00	0.00	0.00	0.00	0.00	0.00	1.03	2.96	4.77	6.81	8.74	11.0	14.1	17.3	20.6	24.0	27.1	30.4	31.7
-25	0.00	0.00	0.00	0.00	0.00	0.03	1.18	3.03	5.13	7.21	9.54	12.5	16.5	21.2	26.6	33.4	40.6	48.6	54.2
-20	0.00	0.00	0.00	0.00	0.00	0.74	2.74	4.76	7.06	9.41	12.5	17.0	22.6	29.2	37.6	48.5	60.3	72.2	78.7
-15	0.00	0.00	0.00	0.00	0.00	0.43	2.36	4.55	6.91	9.61	13.0	17.8	24.2	32.7	45.3	63.6	93.1	141	199
-10	0.00	0.00	0.00	0.00	0.00	1.61	3.67	6.17	8.77	12.3	17.0	23.5	31.8	45.5	65.7	98.7	160	258	348
-5	0.00	0.00	0.00	0.00	0.00	1.10	3.15	5.66	8.34	11.6	15.9	22.4	31.3	44.6	66.4	107	212	573	1281
0	0.00	0.00	0.00	0.00	0.26	2.18	4.54	7.30	10.3	14.1	19.4	27.9	40.2	58.7	92.4	174	458	1416	2593
5	0.00	0.00	0.00	0.00	0.00	1.43	3.53	6.25	9.11	12.5	17.3	24.4	34.6	49.2	73.3	122	256	724	1665
10	0.00	0.00	0.00	0.00	0.33	2.24	4.72	7.44	10.4	14.2	20.2	28.2	39.6	55.6	83.8	143	300	731	1255
15	0.00	0.00	0.00	0.00	0.00	1.38	3.49	6.15	8.87	12.1	16.8	23.2	32.0	43.5	60.7	90.6	155	319	620
20	0.00	0.00	0.00	0.00	0.23	2.04	4.47	6.95	9.72	13.4	18.0	24.6	32.9	43.2	57.1	77.0	104	136	157
25	0.00	0.00	0.00	0.00	0.00	1.04	3.02	5.38	7.85	10.8	14.5	19.4	25.7	33.1	42.1	53.9	69.1	87.4	103
30	0.00	0.00	0.00	0.00	0.00	1.44	3.55	5.70	8.17	11.2	14.4	19.2	24.2	29.7	35.7	42.1	48.4	53.6	56.4
35	0.00	0.00	0.00	0.00	0.00	0.47	2.16	4.15	6.25	8.83	11.6	14.7	18.8	22.9	27.2	31.7	36.1	40.0	42.5
40	0.00	0.00	0.00	0.00	0.00	0.72	2.40	4.19	6.20	8.65	10.9	13.5	16.6	19.5	22.3	24.9	27.2	28.8	29.7
45	0.00	0.00	0.00	0.00	0.00	0.08	1.08	2.66	4.29	6.28	8.35	10.3	12.7	15.1	17.3	19.3	21.1	22.4	23.3
50	0.00	0.00	0.00	0.00	0.00	0.00	1.02	2.40	3.82	5.64	7.34	8.96	10.8	12.5	14.0	15.2	16.2	16.9	17.2
55	0.00	0.00	0.00	0.00	0.00	0.00	0.24	1.06	2.24	3.54	5.05	6.43	7.85	9.33	10.6	11.8	12.6	13.3	13.7
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.64	1.63	2.67	3.89	4.98	6.10	7.27	8.27	9.11	9.72	10.1	10.3
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	0.62	1.11	1.97	2.86	3.71	4.61	5.47	6.22	6.81	7.26	7.51
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.15	0.75	1.42	2.04	2.65	3.30	3.83	4.31	4.64	4.81
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.25	0.58	0.90	1.20	1.53	1.82	2.06	2.27	2.44
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.14
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2025-08-05

V(β) Range:-80 - 80DEG
 V(β) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.6V I:0.2845A P:48.83W PF:0.6095 Freq:50.00Hz Lamp Flux:2950.27x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080040
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																		UNIT: ×10cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.47	0.49	0.49	0.46	0.39	0.23	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.96	0.98	0.97	0.89	0.67	0.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	3.68	3.53	3.37	3.16	2.84	2.40	1.90	1.54	1.17	0.73	0.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	6.28	5.96	5.62	5.20	4.69	4.10	3.48	2.81	1.99	1.13	0.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	10.4	10.3	9.95	9.20	8.15	7.15	6.13	5.01	3.93	2.82	1.69	0.79	0.20	0.00	0.00	0.00	0.00	0.00	
-40	14.5	14.4	13.8	12.4	10.8	9.42	7.88	6.34	4.99	3.63	2.30	1.13	0.00	0.00	0.00	0.00	0.00	0.00	
-35	23.0	22.1	20.8	18.8	16.3	13.8	11.4	9.24	7.38	5.67	3.91	2.36	0.99	0.14	0.00	0.00	0.00	0.00	
-30	30.8	29.0	26.4	23.3	19.9	16.1	13.1	10.6	8.40	6.29	4.24	2.47	1.03	0.00	0.00	0.00	0.00	0.00	
-25	55.2	51.1	44.3	36.6	29.6	23.8	18.7	14.5	11.2	8.60	6.13	3.91	2.07	0.58	0.00	0.00	0.00	0.00	
-20	77.3	68.3	56.2	43.9	34.6	27.2	20.5	15.5	11.9	8.90	6.23	3.74	1.84	0.32	0.00	0.00	0.00	0.00	
-15	213	165	111	74.5	52.4	37.8	27.7	20.0	15.0	11.2	8.20	5.54	3.08	1.20	0.00	0.00	0.00	0.00	
-10	320	216	132	84.6	57.4	39.7	28.0	19.9	14.8	11.0	8.02	5.26	2.70	0.84	0.00	0.00	0.00	0.00	
-5	1446	789	293	136	78.3	51.4	35.8	25.0	18.0	13.1	9.59	6.73	4.00	1.74	0.06	0.00	0.00	0.00	
0	2139	858	280	127	74.1	48.9	33.7	23.7	16.8	12.1	8.79	5.98	3.31	1.17	0.00	0.00	0.00	0.00	
5	1898	1022	360	157	86.5	55.9	39.0	27.4	19.5	14.1	10.2	7.13	4.53	2.06	0.19	0.00	0.00	0.00	
10	1084	510	214	112	69.7	47.4	34.2	23.8	17.3	12.5	8.99	6.11	3.65	1.34	0.00	0.00	0.00	0.00	
15	705	430	199	109	69.4	48.4	35.5	25.9	18.6	13.8	9.94	6.90	4.43	2.07	0.17	0.00	0.00	0.00	
20	151	122	91.0	66.7	49.6	37.7	28.8	21.2	15.6	11.8	8.31	5.58	3.34	1.15	0.00	0.00	0.00	0.00	
25	107	94.4	75.8	58.9	45.7	35.7	28.0	21.5	16.0	12.2	9.00	6.12	3.88	1.77	0.04	0.00	0.00	0.00	
30	55.8	52.0	46.2	39.7	33.2	27.1	21.9	17.0	13.1	10.1	7.18	4.74	2.76	0.81	0.00	0.00	0.00	0.00	
35	43.1	41.4	38.1	33.8	29.2	24.6	20.3	16.3	12.7	9.96	7.41	4.93	3.04	1.21	0.00	0.00	0.00	0.00	
40	29.5	28.4	26.6	24.2	21.5	18.6	15.5	12.7	10.0	7.77	5.47	3.52	1.84	0.23	0.00	0.00	0.00	0.00	
45	23.5	23.0	21.9	20.3	18.5	16.3	14.0	11.7	9.32	7.33	5.37	3.47	1.95	0.46	0.00	0.00	0.00	0.00	
50	17.2	16.8	16.1	15.1	13.8	12.3	10.6	8.72	6.97	5.33	3.60	2.18	0.84	0.00	0.00	0.00	0.00	0.00	
55	13.8	13.6	13.2	12.4	11.5	10.3	8.98	7.49	6.00	4.62	3.19	1.91	0.75	0.03	0.00	0.00	0.00	0.00	
60	10.3	10.1	9.71	9.14	8.30	7.32	6.23	5.01	3.93	2.80	1.68	0.69	0.00	0.00	0.00	0.00	0.00	0.00	
65	7.58	7.49	7.22	6.79	6.21	5.48	4.66	3.76	2.90	2.03	1.14	0.55	0.07	0.00	0.00	0.00	0.00	0.00	
70	4.81	4.69	4.43	4.02	3.56	3.01	2.39	1.81	1.20	0.57	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	2.50	2.47	2.35	2.11	1.87	1.63	1.32	1.02	0.72	0.40	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.19	0.17	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: