

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	10248.4 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	29.8V x 27.8H
	At 50% of Imax	14.7V x 13.5H
	At 90% of Imax	3.9V x 5.2H

Beam Flux	Total	978.9 lumens per klm.
	To 10% of Imax	716.9 lumens per klm.
	To 50% of Imax	324.4 lumens per klm.
	To 90% of Imax	31.9 lumens per klm.

Upward LOR	0.0 %
Downward LOR	97.9 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:277.8V I:0.1043A P:14.15W PF:0.4984 Freq:50.00Hz Lamp Flux:322.633x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080043
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

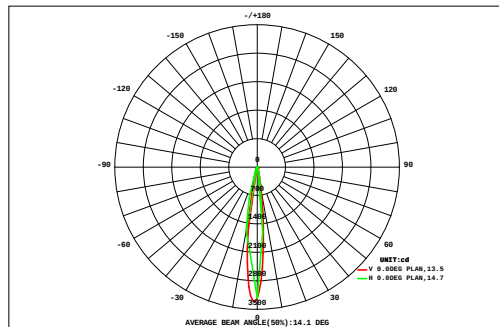

DATA OF LAMP		Eff:22.80lm/W	
MODEL-PZT-R170-12P-RDM-B		Imax(cd)	3306
NOMINAL POWER(W)	14	AVAILABILITY(%)	75.8
RATED VOLTAGE(V)	277	Avai. FLUX(lm)	244.6
NOMINAL FLUX(lm)	322.633	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	322.6
TEST VOLTAGE(V)	277	θ @50%(H,V)	13,15DEG

		AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
		0.06	0.07	0.09	0.11	0.14	0.16	0.18	0.21	0.23	0.24	0.23	0.22	0.20	0.17	0.14	0.12	0.10	0.08	2.74	0.00		
VERTICAL (DEG)	27	0.06	0.08	0.10	0.13	0.17	0.22	0.27	0.33	0.38	0.42	0.42	0.39	0.34	0.29	0.23	0.18	0.14	0.11	4.27	0.00		
	24	0.08	0.11	0.14	0.18	0.24	0.30	0.37	0.45	0.50	0.53	0.51	0.46	0.39	0.31	0.25	0.19	0.15	0.11	5.28	0.00		
	21	0.11	0.14	0.18	0.24	0.30	0.39	0.48	0.57	0.63	0.65	0.61	0.53	0.43	0.34	0.26	0.20	0.15	0.11	6.30	0.00		
	18	0.08	0.12	0.16	0.23	0.33	0.51	0.82	1.38	2.21	2.95	3.04	2.44	1.60	0.97	0.60	0.38	0.26	0.18	18.3	14.5		
	15	0.10	0.14	0.20	0.28	0.44	0.71	1.22	2.12	3.31	4.15	4.02	3.04	1.91	1.13	0.68	0.43	0.29	0.20	24.4	21.0		
	12	0.14	0.20	0.28	0.43	0.69	1.15	2.04	3.50	5.04	5.55	4.60	2.97	1.67	0.97	0.56	0.36	0.24	0.17	30.6	27.1		
	9	0.12	0.16	0.24	0.35	0.56	0.94	1.72	3.22	5.25	6.69	6.50	4.86	2.91	1.54	0.83	0.49	0.31	0.21	36.9	33.7		
	-9	0.09	0.12	0.18	0.25	0.39	0.68	1.29	2.79	5.32	7.82	8.54	6.94	4.28	2.17	1.12	0.63	0.39	0.25	43.3	40.2		
		0.14	0.20	0.29	0.46	0.81	1.54	3.24	6.17	9.05	9.86	8.05	4.96	2.45	1.15	0.63	0.39	0.25	0.17	49.8	46.7		
		0.13	0.19	0.27	0.43	0.74	1.41	2.95	5.60	8.21	8.94	7.32	4.54	2.26	1.07	0.60	0.37	0.24	0.16	45.5	42.2		
		0.07	0.09	0.13	0.17	0.22	0.27	0.32	0.59	1.49	2.83	3.68	3.43	2.38	1.34	0.73	0.45	0.30	0.20	18.7	15.6		
0.08		0.11	0.15	0.19	0.25	0.31	0.39	0.44	0.43	0.72	1.12	1.21	0.99	0.67	0.43	0.29	0.21	0.15	8.12	3.52			
-12	0.09	0.13	0.17	0.23	0.30	0.38	0.36	0.13	0.00	0.00	0.00	0.00	0.00	0.03	0.09	0.12	0.10	0.08	2.21	0.00			
-15	0.04	0.06	0.08	0.11	0.15	0.19	0.26	0.34	0.44	0.55	0.59	0.56	0.46	0.36	0.27	0.20	0.15	0.11	4.93	0.00			
-18	0.03	0.04	0.06	0.07	0.09	0.10	0.12	0.14	0.18	0.25	0.32	0.33	0.30	0.25	0.20	0.15	0.12	0.09	2.83	0.00			
-21	0.04	0.05	0.06	0.08	0.09	0.10	0.09	0.07	0.04	0.03	0.02	0.02	0.03	0.04	0.05	0.05	0.04	0.03	0.95	0.00			
-24	0.02	0.03	0.04	0.05	0.06	0.07	0.07	0.07	0.08	0.08	0.08	0.08	0.08	0.07	0.06	0.05	0.04	0.03	1.06	0.00			
-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)				6	9	12	15	18	21	24	27			
Φ t	1.46	2.03	2.83	4.02	5.96	9.41	16.2	28.1	42.8	52.3	49.7	37.0	22.7	12.9	7.73	5.05	3.47	2.45	306	---			
Φ a	0.00	0.00	0.00	0.00	0.80	4.58	12.4	25.2	39.8	49.1	46.6	34.2	20.2	9.84	1.79	0.00	0.00	0.00	---	245			


one-half-peak spread: U:5.0,D:9.9 , L:6.5,R:7NEMA Beam Type: Type 2 x 3 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:277.8V I:0.1043A P:14.15W PF:0.4984 Freq:50.00Hz Lamp Flux:322.633x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080043
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

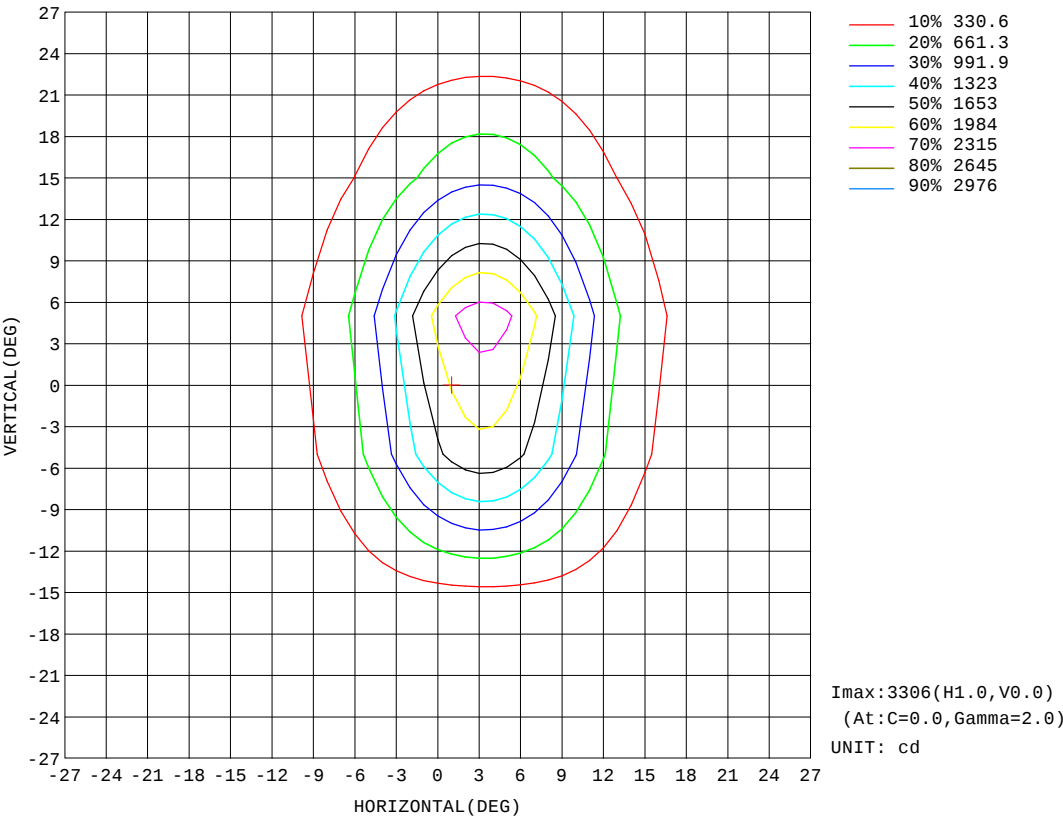


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:277.8V I:0.1043A P:14.15W PF:0.4984 Freq:50.00Hz Lamp Flux:322.633x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080043
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

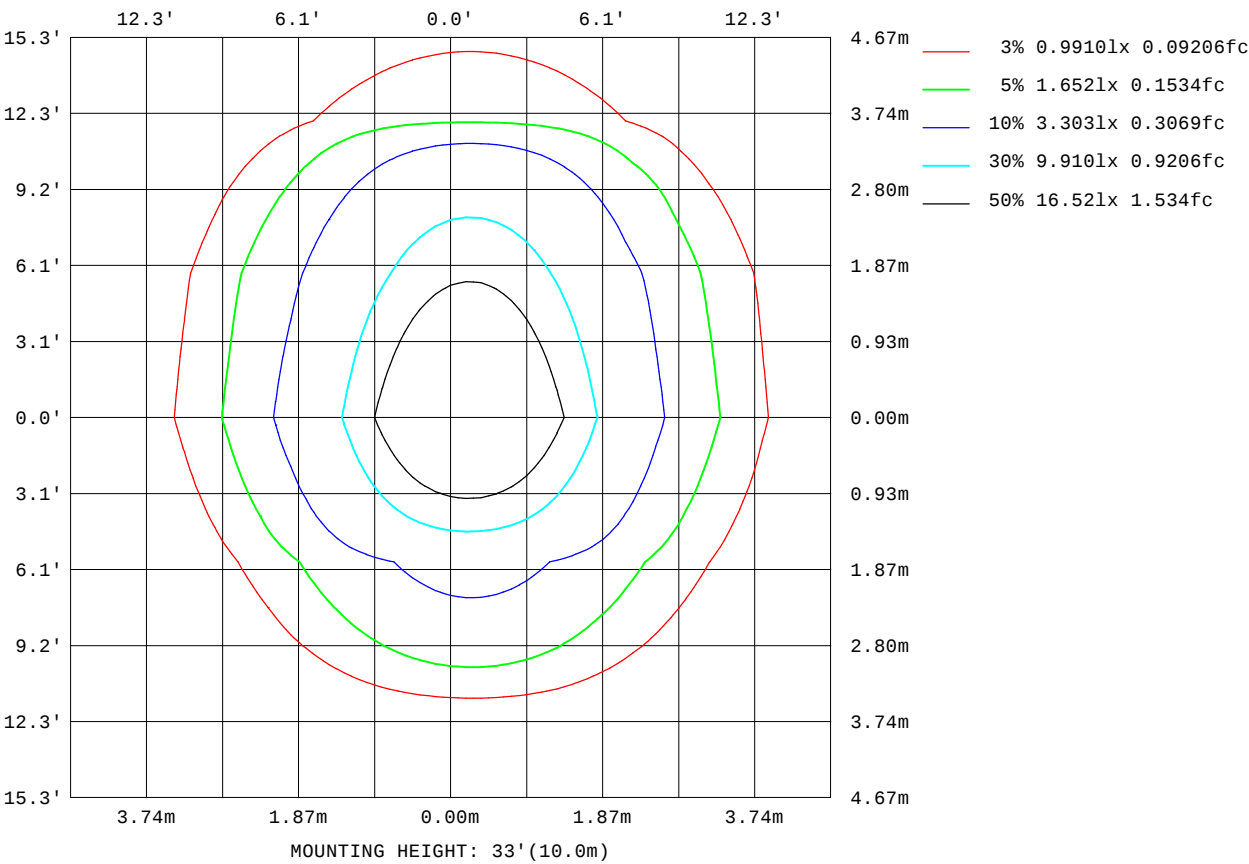

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

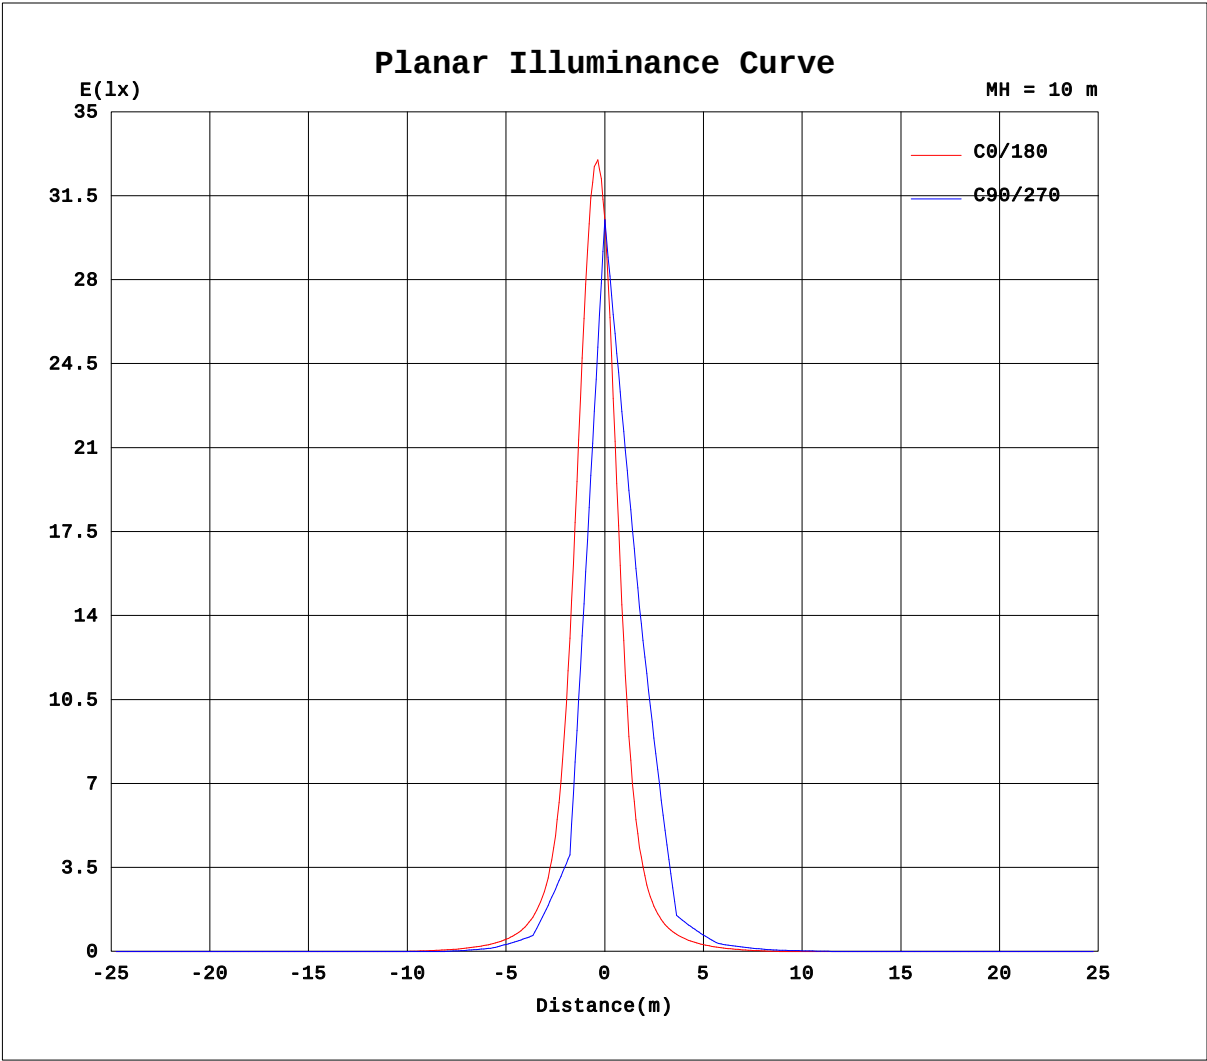


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:277.8V I:0.1043A P:14.15W PF:0.4984 Freq:50.00Hz Lamp Flux:322.633x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080043
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

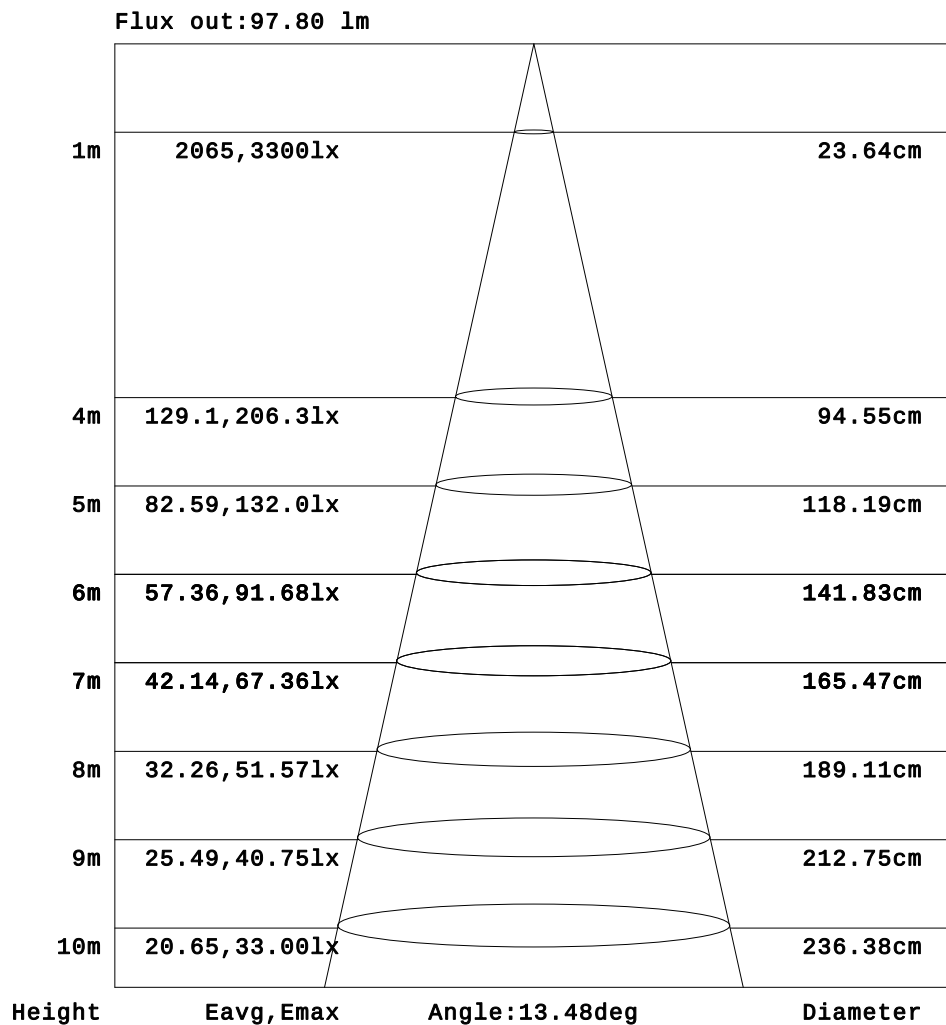

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.8V I:0.1043A P:14.15W PF:0.4984 Freq:50.00Hz Lamp Flux:322.633x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080043
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: cd			
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.96	3.10	5.24	7.22	9.35	10.9	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.62	7.94	12.1	15.9	20.4	22.1	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.28	3.65	8.49	15.3	23.8	33.0	43.2	50.6	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.18	10.2	18.6	28.9	42.7	58.0	73.3	81.9	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	4.09	12.2	22.8	38.4	62.1	101	165	241	
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.84	11.2	21.8	38.2	64.2	108	190	320	438	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.81	9.95	20.8	37.1	64.9	119	263	716	1601	
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.47	16.8	31.3	54.7	99.0	207	571	1788	3223	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.58	12.4	24.6	42.7	74.0	139	321	907	2089	
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	6.98	16.8	30.6	51.2	88.3	169	372	916	1591	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.91	10.8	21.4	35.7	58.2	97.7	183	393	778	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.50	12.5	22.4	35.5	53.7	80.1	116	158	186	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.00	6.03	13.6	22.6	34.2	49.6	69.7	94.0	115	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	5.48	11.6	18.4	26.0	34.0	42.2	48.9	52.4	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.53	4.98	9.98	15.4	21.0	26.6	31.5	34.8	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.32	5.82	9.28	12.5	15.3	17.3	18.3	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.44	2.20	3.95	5.62	7.66	9.35	10.4	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.33	1.56	2.44	2.92	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.56	1.07	1.39	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.8V I:0.1043A P:14.15W PF:0.4984 Freq:50.00Hz Lamp Flux:322.633x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-B	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080043
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	11.0	9.96	8.36	6.27	3.97	1.66	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	21.3	18.8	15.1	10.7	6.11	1.53	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	52.1	47.1	38.1	28.1	18.9	11.2	5.14	1.64	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	80.3	68.8	53.1	37.6	25.3	15.4	7.21	0.95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	260	198	127	78.2	48.6	29.3	16.1	6.47	1.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	403	265	156	91.4	54.7	31.5	16.3	6.25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	1802	1001	362	158	82.8	46.8	26.3	12.7	3.88	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	2684	1094	346	151	76.9	43.3	23.6	11.3	2.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	2371	1290	454	186	93.6	52.7	30.5	15.9	5.93	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	1354	633	261	128	70.9	41.5	24.4	11.5	3.43	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	881	527	246	123	70.3	42.8	26.1	14.0	4.85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	177	140	98.3	66.3	44.2	29.0	17.7	7.99	1.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	119	103	78.2	56.2	39.1	26.6	16.8	8.66	1.72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	51.6	46.7	39.5	31.2	23.3	15.8	9.22	3.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	35.4	33.3	29.1	23.8	18.1	12.6	7.26	2.72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	18.2	17.0	14.7	11.9	8.55	4.97	1.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	10.7	10.1	8.86	6.98	4.96	3.21	1.36	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	2.89	2.49	1.59	0.37	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	1.48	1.36	0.99	0.45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: