


Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)		9887.5 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	29.3V x 27.2H
	At 50% of Imax	13.1V x 12.7H
	At 90% of Imax	3.7V x 4.9H
Beam Flux	Total	981.3 lumens per klm.
	To 10% of Imax	654.2 lumens per klm.
	To 50% of Imax	283.2 lumens per klm.
	To 90% of Imax	26.9 lumens per klm.
Upward LOR		0.0 %
Downward LOR		98.1 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:277.8V I:0.1020A P:14.00W PF:0.4943 Freq:49.99Hz Lamp Flux:1091.8x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080042
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

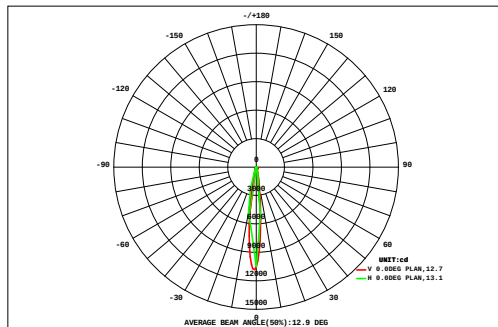

DATA OF LAMP		Eff:77.98lm/W	
MODEL: PZT-R170-12P-RDM-G		Imax(cd)	10795
NOMINAL POWER(W)	14	AVAILABILITY(%)	69.4
RATED VOLTAGE(V)	277	Avai. FLUX(lm)	758.1
NOMINAL FLUX(lm)	1091.8	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1092
TEST VOLTAGE(V)	277	θ @50%(H,V)	13,13DEG

		AREA FLUX DIAGRAM															UNIT:lm				Φ t	Φ a
		0.28	0.33	0.39	0.45	0.52	0.60	0.67	0.74	0.80	0.83	0.82	0.78	0.71	0.63	0.55	0.47	0.40	0.33	10.3	0.00	
VERTICAL (DEG)	27	0.28	0.33	0.39	0.45	0.52	0.60	0.67	0.74	0.80	0.83	0.82	0.78	0.71	0.63	0.55	0.47	0.40	0.33	10.3	0.00	
	24	0.29	0.35	0.42	0.52	0.63	0.77	0.93	1.09	1.25	1.35	1.36	1.28	1.14	0.97	0.81	0.67	0.55	0.45	14.8	0.00	
	21	0.35	0.44	0.54	0.66	0.82	1.01	1.22	1.44	1.61	1.69	1.64	1.49	1.28	1.06	0.86	0.70	0.56	0.45	17.8	0.00	
	18	0.43	0.53	0.66	0.82	1.03	1.27	1.54	1.80	1.99	2.03	1.91	1.67	1.40	1.13	0.90	0.71	0.56	0.45	20.8	0.00	
	15	0.37	0.47	0.61	0.80	1.11	1.62	2.57	4.31	6.78	9.00	9.38	7.49	4.88	2.95	1.86	1.25	0.89	0.65	57.0	44.4	
	12	0.41	0.54	0.71	0.98	1.42	2.21	3.81	6.55	10.1	12.7	12.4	9.28	5.78	3.40	2.09	1.37	0.96	0.70	75.4	63.2	
	9	0.54	0.72	0.97	1.39	2.13	3.48	6.36	10.7	15.3	17.0	14.1	8.96	5.03	2.88	1.77	1.17	0.82	0.60	94.0	82.1	
	6	0.47	0.62	0.83	1.17	1.77	2.90	5.33	9.92	16.2	21.1	20.6	15.0	8.69	4.63	2.54	1.54	1.03	0.72	115	104	
	3	0.38	0.49	0.66	0.90	1.32	2.15	3.97	8.67	16.7	25.2	27.6	21.6	12.8	6.58	3.39	1.95	1.25	0.86	136	126	
	0	0.53	0.71	1.01	1.52	2.52	4.80	10.1	19.0	29.2	32.3	25.5	14.8	7.24	3.61	1.95	1.23	0.84	0.61	158	147	
	-3	0.50	0.68	0.96	1.43	2.34	4.41	9.20	17.3	26.5	29.4	23.3	13.5	6.70	3.39	1.86	1.18	0.82	0.60	144	133	
	-6	0.30	0.40	0.52	0.65	0.81	0.92	1.01	1.87	4.31	8.97	12.1	11.0	7.17	4.06	2.29	1.43	0.97	0.70	59.4	48.4	
	-9	0.33	0.45	0.57	0.71	0.88	1.02	1.25	1.39	1.29	2.08	3.67	3.93	3.05	2.07	1.39	0.98	0.72	0.54	26.3	10.9	
	-12	0.38	0.51	0.65	0.82	1.04	1.25	1.18	0.40	0.02	0.00	0.00	0.00	0.00	0.11	0.37	0.46	0.43	0.35	7.97	0.00	
	-15	0.21	0.28	0.35	0.44	0.56	0.69	0.88	1.14	1.46	1.76	1.90	1.78	1.48	1.17	0.91	0.70	0.54	0.42	16.7	0.00	
	-18	0.17	0.22	0.26	0.32	0.37	0.41	0.46	0.53	0.66	0.88	1.07	1.12	1.01	0.85	0.69	0.55	0.43	0.35	10.4	0.00	
	-21	0.20	0.23	0.28	0.34	0.38	0.40	0.39	0.33	0.22	0.15	0.13	0.14	0.18	0.22	0.24	0.22	0.20	0.18	4.44	0.00	
	-24	0.15	0.18	0.21	0.25	0.28	0.30	0.30	0.29	0.30	0.32	0.32	0.31	0.29	0.26	0.25	0.23	0.21	0.18	4.63	0.00	
	-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)				6	9	12	15	18	21	24	27	
Φ t	6.29	8.13	10.6	14.2	19.9	30.2	51.2	87.5	135	167	158	114	68.8	40.0	24.7	16.8	12.2	9.15	973	---		
Φ a	0.00	0.00	0.00	0.00	1.79	13.8	38.0	77.7	125	157	148	105	60.6	28.1	3.90	0.00	0.00	0.00	---	758		


one-half-peak spread: U:4.9,D:8.4 , L:6.1,R:6NEMA Beam Type: Type 2 x 3 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:277.8V I:0.1020A P:14.00W PF:0.4943 Freq:49.99Hz Lamp Flux:1091.8x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080042
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

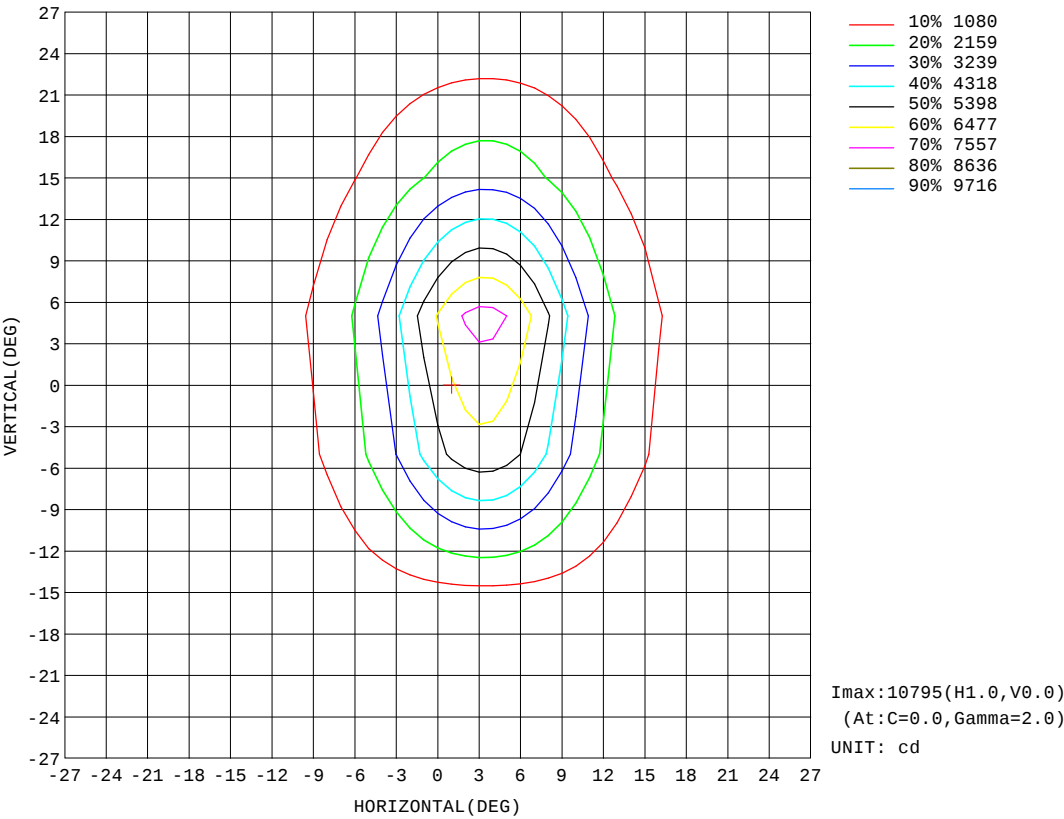


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:277.8V I:0.1020A P:14.00W PF:0.4943 Freq:49.99Hz Lamp Flux:1091.8x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080042
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

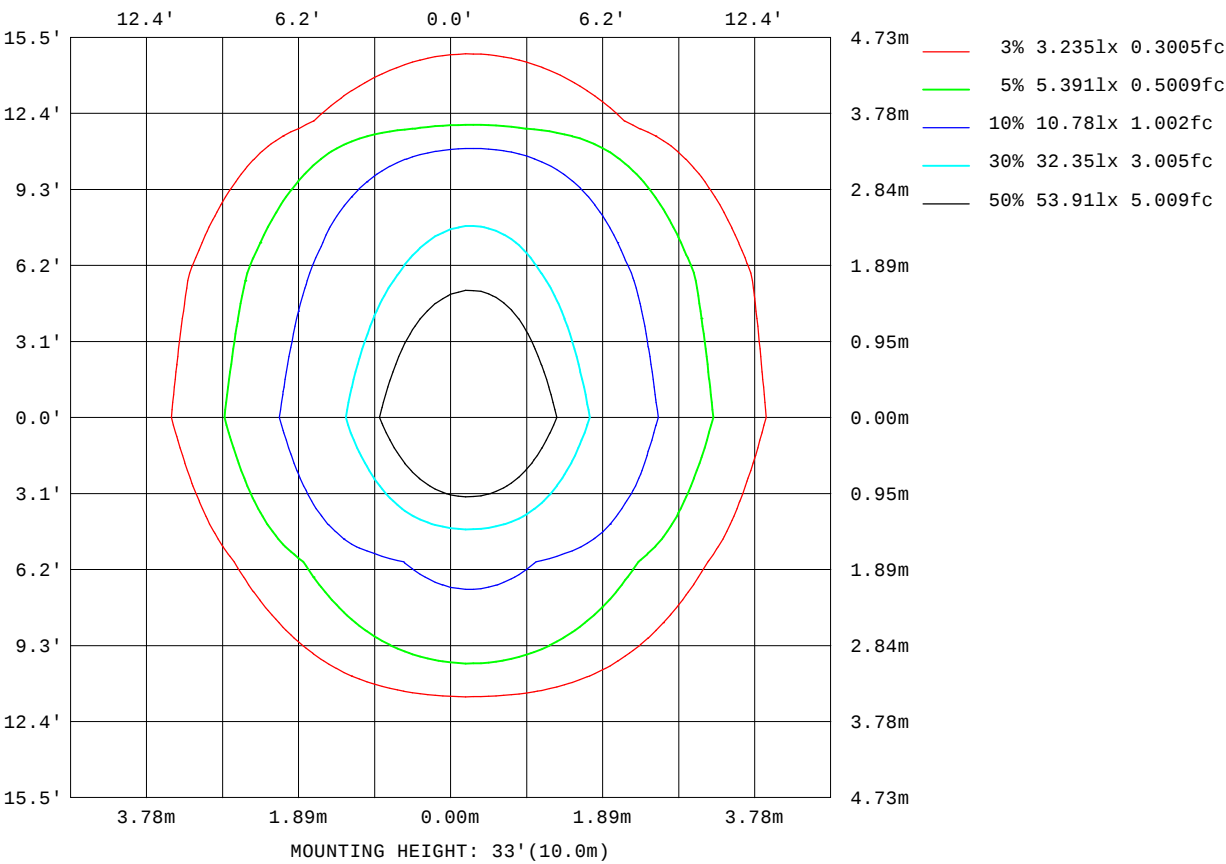

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

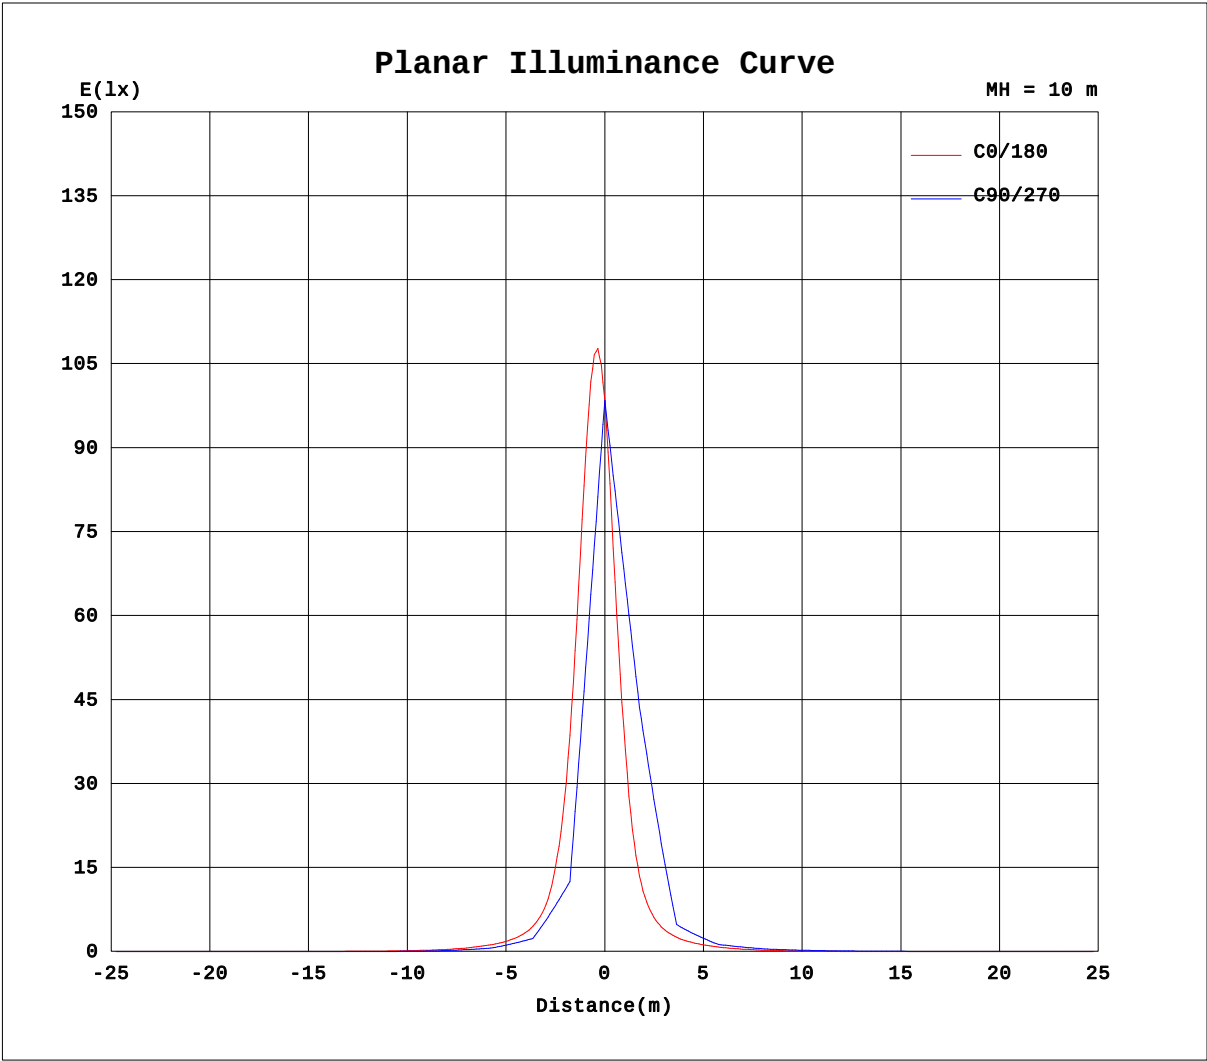


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:277.8V I:0.1020A P:14.00W PF:0.4943 Freq:49.99Hz Lamp Flux:1091.8x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080042
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

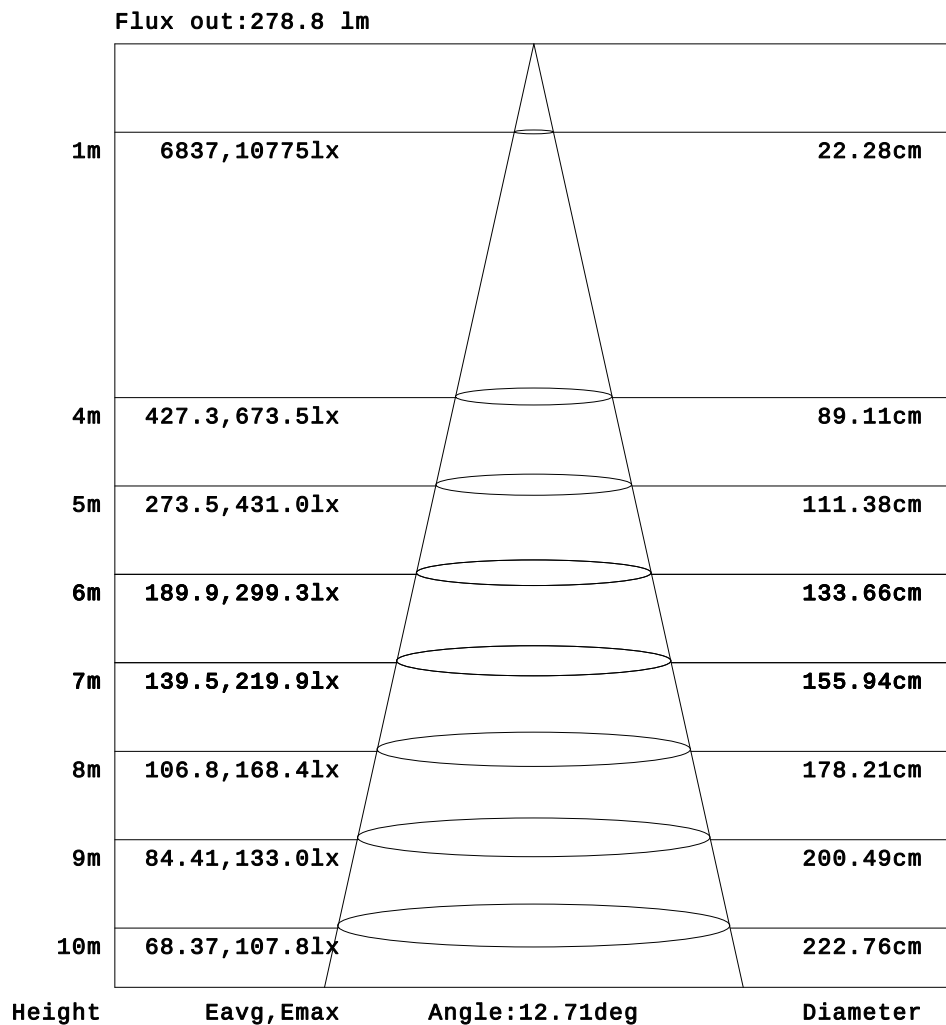

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.8V I:0.1020A P:14.00W PF:0.4943 Freq:49.99Hz Lamp Flux:1091.8x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080042
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1		UNIT: ×10cd																	
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.25	0.35
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.30	0.60	0.73	0.75
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03	0.32	0.59	0.82	1.08	1.38	1.73	1.97	2.10
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.28	0.89	1.36	1.84	2.34	2.74	3.08	3.33	3.50
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.37	0.74	1.37	2.11	2.89	3.72	4.51	5.27	6.11	6.67
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.28	1.04	1.68	2.42	3.50	4.59	5.74	6.90	8.06	9.48	10.0
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.44	1.18	1.97	2.98	4.43	6.12	8.06	10.7	13.5	16.8	19.1
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.31	1.15	1.95	2.98	4.63	6.69	9.12	12.2	16.8	21.5	26.4	29.0
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.26	1.12	2.04	3.19	4.94	7.31	10.5	15.8	23.1	34.7	54.0	76.7
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.87	1.77	2.98	4.57	7.08	10.2	15.9	24.3	37.3	61.3	100	136
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.70	1.64	2.77	4.27	6.80	10.1	15.5	24.4	40.6	82.2	225	509
0	0.00	0.00	0.00	0.00	0.00	0.00	0.30	1.29	2.34	3.64	5.62	9.06	13.9	21.3	35.0	67.1	178	549	1048
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.93	1.94	3.11	4.81	7.69	11.7	17.7	27.1	46.4	98.7	283	656
10	0.00	0.00	0.00	0.00	0.00	0.00	0.38	1.36	2.41	3.73	5.93	9.18	13.8	20.3	31.3	54.3	115	282	485
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.91	1.88	3.03	4.70	7.27	10.9	15.4	22.1	33.8	58.6	123	238
20	0.00	0.00	0.00	0.00	0.00	0.00	0.29	1.20	2.20	3.51	5.21	8.03	11.2	15.1	20.5	28.3	39.0	51.1	59.5
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.63	1.53	2.61	3.96	5.82	8.45	11.2	14.7	19.2	25.3	32.4	38.6
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.75	1.66	2.76	3.94	5.79	7.79	9.85	12.1	14.6	17.1	19.1	20.2
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.21	0.95	1.90	2.90	4.06	5.73	7.29	8.93	10.7	12.4	13.9	14.9
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.19	0.94	1.85	2.69	3.68	4.92	6.03	7.09	8.09	8.96	9.61	9.94
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.31	0.97	1.74	2.49	3.42	4.35	5.20	5.96	6.63	7.17	7.50
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.74	1.38	1.99	2.69	3.37	3.93	4.39	4.78	5.05	5.20
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.22	0.56	1.04	1.58	2.16	2.67	3.10	3.45	3.70	3.85
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.50	0.93	1.38	1.77	2.11	2.34	2.50	2.58
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.17	0.37	0.61	0.81	1.01	1.24	1.41	1.51
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	0.30	0.43	0.49
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.11	0.19	0.24
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.8V I:0.1020A P:14.00W PF:0.4943 Freq:49.99Hz Lamp Flux:1091.8x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080042
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2 UNIT: ×10cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.36	0.31	0.25	0.19	0.12	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.68	0.57	0.46	0.33	0.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	2.14	2.11	2.02	1.77	1.39	1.06	0.79	0.48	0.25	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	3.56	3.62	3.41	2.91	2.35	1.89	1.33	0.76	0.32	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	6.72	6.36	5.93	5.21	4.32	3.42	2.56	1.80	1.18	0.60	0.18	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	9.55	8.83	7.92	6.80	5.61	4.21	3.17	2.31	1.58	0.83	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	19.5	17.8	15.0	12.0	9.25	7.07	5.13	3.63	2.55	1.65	0.79	0.14	0.00	0.00	0.00	0.00	0.00	0.00
-20	28.4	24.7	19.8	14.7	11.1	8.31	5.72	4.02	2.77	1.77	0.86	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	82.1	62.9	41.6	27.2	18.3	12.6	8.62	5.61	3.84	2.58	1.55	0.61	0.00	0.00	0.00	0.00	0.00	0.00
-10	124	82.7	50.1	31.2	20.6	13.3	8.81	5.59	3.81	2.53	1.49	0.52	0.00	0.00	0.00	0.00	0.00	0.00
-5	580	300	114	50.6	28.9	18.2	11.9	7.53	4.94	3.24	2.05	1.05	0.11	0.00	0.00	0.00	0.00	0.00
0	846	323	106	47.8	27.4	17.4	11.1	7.01	4.51	2.93	1.78	0.79	0.00	0.00	0.00	0.00	0.00	0.00
5	755	387	140	58.5	32.0	20.1	13.3	8.66	5.52	3.63	2.27	1.21	0.27	0.00	0.00	0.00	0.00	0.00
10	417	191	81.4	42.1	25.3	16.7	11.5	7.23	4.81	3.13	1.89	0.85	0.00	0.00	0.00	0.00	0.00	0.00
15	272	161	75.3	40.7	25.3	17.1	12.0	8.24	5.27	3.60	2.24	1.14	0.25	0.00	0.00	0.00	0.00	0.00
20	56.9	45.9	33.8	24.4	17.7	12.9	9.44	6.35	4.26	2.90	1.66	0.67	0.00	0.00	0.00	0.00	0.00	0.00
25	39.8	34.9	27.8	21.3	16.1	12.2	9.20	6.64	4.42	3.09	1.92	0.87	0.09	0.00	0.00	0.00	0.00	0.00
30	19.9	18.5	16.2	13.7	11.2	8.94	6.92	4.91	3.41	2.34	1.27	0.38	0.00	0.00	0.00	0.00	0.00	0.00
35	15.1	14.4	13.2	11.5	9.73	7.98	6.35	4.72	3.31	2.30	1.36	0.46	0.00	0.00	0.00	0.00	0.00	0.00
40	9.89	9.48	8.79	7.87	6.83	5.69	4.47	3.34	2.35	1.50	0.66	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	7.59	7.41	6.99	6.40	5.69	4.86	3.94	2.99	2.09	1.34	0.62	0.10	0.00	0.00	0.00	0.00	0.00	0.00
50	5.20	5.04	4.76	4.38	3.91	3.30	2.62	1.90	1.22	0.61	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	3.90	3.84	3.66	3.39	3.03	2.57	2.03	1.45	0.88	0.43	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	2.59	2.51	2.36	2.14	1.81	1.41	0.98	0.52	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	1.54	1.51	1.41	1.24	1.01	0.79	0.58	0.35	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.49	0.44	0.34	0.18	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.25	0.23	0.20	0.12	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: