

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	10127.3 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	29.5V x 27.3H
	At 50% of Imax	14.0V x 13.4H
	At 90% of Imax	3.8V x 5.3H

Beam Flux	Total	979.6 lumens per klm.
	To 10% of Imax	696.4 lumens per klm.
	To 50% of Imax	314.6 lumens per klm.
	To 90% of Imax	31.0 lumens per klm.

Upward LOR	0.0 %
Downward LOR	98.0 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:277.8V I:0.0840A P:10.81W PF:0.4546 Freq:49.99Hz Lamp Flux:505.148x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080041
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

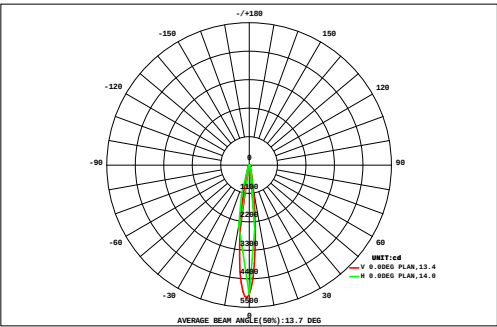

DATA OF LAMP		Eff:46.72lm/W	
MODEL: PZT-R170-12P-RDM-R		Imax(cd)	5116
NOMINAL POWER(W)	11	AVAILABILITY(%)	73.8
RATED VOLTAGE(V)	277	Avai. FLUX(lm)	372.9
NOMINAL FLUX(lm)	505.148	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	505.1
TEST VOLTAGE(V)	277	θ @50%(H,V)	13,14DEG


VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm		Φ t	Φ a
	0.11	0.13	0.15	0.18	0.21	0.25	0.28	0.32	0.34	0.35	0.35	0.33	0.30	0.26	0.22	0.19	0.16	0.13	4.27	0.00
27	0.11	0.13	0.17	0.21	0.27	0.33	0.40	0.48	0.56	0.60	0.61	0.57	0.50	0.42	0.35	0.28	0.22	0.18	6.39	0.00
24	0.14	0.18	0.22	0.28	0.36	0.44	0.54	0.65	0.73	0.76	0.74	0.67	0.56	0.46	0.37	0.29	0.23	0.18	7.80	0.00
21	0.17	0.22	0.28	0.36	0.45	0.56	0.69	0.82	0.90	0.92	0.87	0.75	0.62	0.49	0.39	0.30	0.23	0.18	9.21	0.00
18	0.15	0.19	0.26	0.35	0.50	0.75	1.22	2.09	3.33	4.41	4.60	3.75	2.47	1.44	0.87	0.56	0.39	0.28	27.6	21.9
15	0.16	0.22	0.31	0.43	0.65	1.05	1.84	3.22	4.99	6.25	6.12	4.70	2.94	1.66	0.98	0.62	0.42	0.30	36.9	31.5
12	0.22	0.31	0.43	0.64	1.00	1.70	3.09	5.31	7.58	8.39	7.08	4.65	2.54	1.38	0.83	0.52	0.36	0.26	46.3	40.9
9	0.19	0.26	0.36	0.53	0.83	1.39	2.62	4.91	7.99	10.2	10.00	7.52	4.48	2.30	1.21	0.71	0.46	0.31	56.3	51.1
6	0.15	0.20	0.28	0.39	0.61	1.00	1.99	4.29	8.20	12.1	13.1	10.7	6.64	3.33	1.64	0.92	0.57	0.38	66.5	61.7
3	0.23	0.31	0.45	0.70	1.19	2.36	5.04	9.39	14.1	15.3	12.4	7.61	3.79	1.70	0.92	0.56	0.37	0.26	76.7	71.7
0	0.21	0.30	0.43	0.66	1.11	2.17	4.60	8.53	12.8	13.9	11.3	6.95	3.50	1.60	0.87	0.54	0.36	0.26	70.1	65.1
-3	0.12	0.17	0.22	0.28	0.36	0.40	0.47	0.92	2.20	4.39	5.67	5.29	3.64	2.05	1.10	0.66	0.44	0.31	28.7	23.8
-6	0.14	0.19	0.24	0.31	0.40	0.47	0.58	0.66	0.65	1.09	1.71	1.85	1.49	1.01	0.64	0.44	0.32	0.23	12.4	5.26
-9	0.16	0.22	0.28	0.37	0.48	0.58	0.51	0.17	0.00	0.00	0.00	0.00	0.00	0.03	0.14	0.19	0.18	0.15	3.45	0.00
-12	0.09	0.12	0.15	0.19	0.24	0.31	0.40	0.53	0.68	0.84	0.92	0.86	0.71	0.55	0.41	0.31	0.24	0.18	7.73	0.00
-15	0.07	0.09	0.11	0.14	0.16	0.18	0.20	0.23	0.28	0.39	0.50	0.52	0.47	0.40	0.31	0.24	0.19	0.15	4.63	0.00
-18	0.09	0.10	0.12	0.15	0.16	0.17	0.16	0.13	0.08	0.05	0.04	0.05	0.06	0.08	0.10	0.10	0.09	0.08	1.81	0.00
-21	0.06	0.07	0.09	0.11	0.12	0.13	0.13	0.12	0.13	0.14	0.14	0.14	0.13	0.12	0.10	0.10	0.09	0.08	1.98	0.00
-24	0.06	0.07	0.09	0.11	0.12	0.13	0.13	0.12	0.13	0.14	0.14	0.14	0.13	0.12	0.10	0.10	0.09	0.08	1.98	0.00
-27	0.06	0.07	0.09	0.11	0.12	0.13	0.13	0.12	0.13	0.14	0.14	0.14	0.13	0.12	0.10	0.10	0.09	0.08	1.98	0.00
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)	6	9	12	15	18	21	24	27			
Φ t	2.56	3.41	4.56	6.28	9.10	14.3	24.8	42.7	65.5	80.1	76.2	56.9	34.8	19.3	11.5	7.54	5.32	3.90	469	---
Φ a	0.00	0.00	0.00	0.00	0.85	6.81	19.1	38.4	61.1	75.4	71.7	52.7	31.2	13.9	1.89	0.00	0.00	0.00	---	373

one-half-peak spread: U:5.0,D:9.3 , L:6.4,R:7NEMA Beam Type: Type 2 x 3 (H x V)

H(β) Range:-90 - 90DEG H(β) Interval: 1.0DEG Test Speed: HIGH Temperature:28.0DEG Operators:QC1 Test Date:2025-08-05	V(B) Range:-80 - 80DEG V(B) Interval: 5.0DEG Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354 Humidity:83% Test Distance:8.300m [K=1.0000] Remarks:
--	---

ISOCANDELA DIAGRAM

Test:U:277.8V I:0.0840A P:10.81W PF:0.4546 Freq:49.99Hz Lamp Flux:505.148x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080041
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

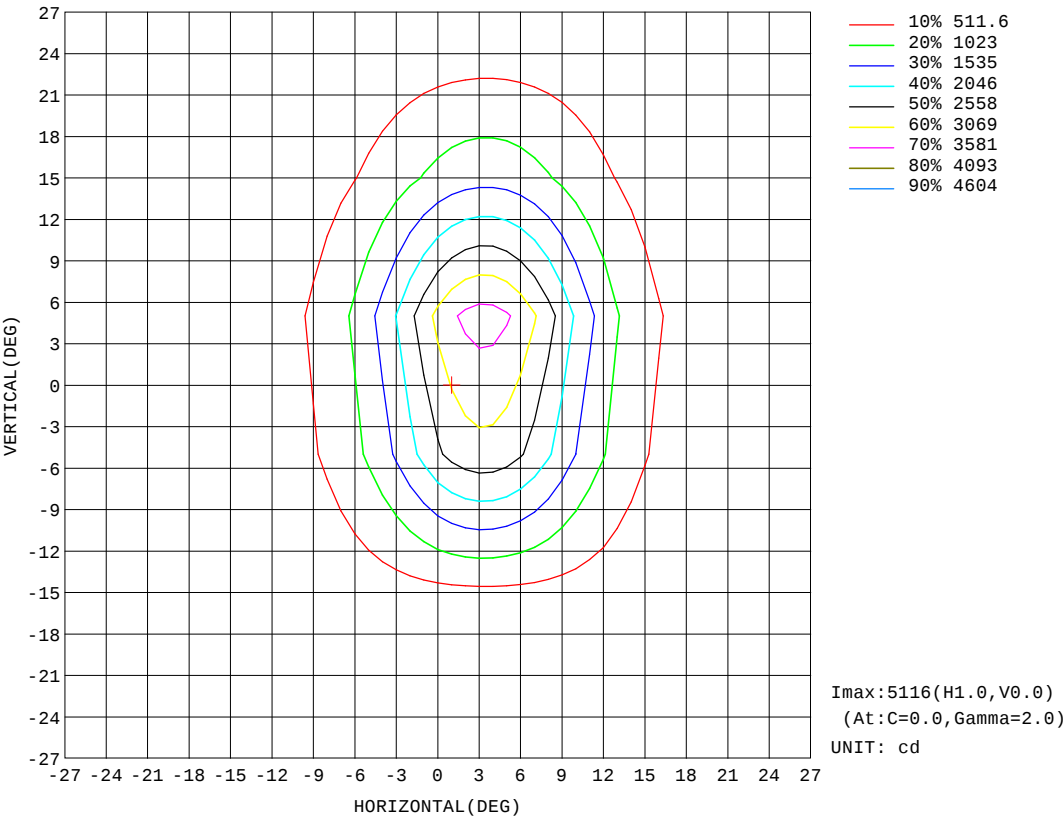


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:277.8V I:0.0840A P:10.81W PF:0.4546 Freq:49.99Hz Lamp Flux:505.148x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080041
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

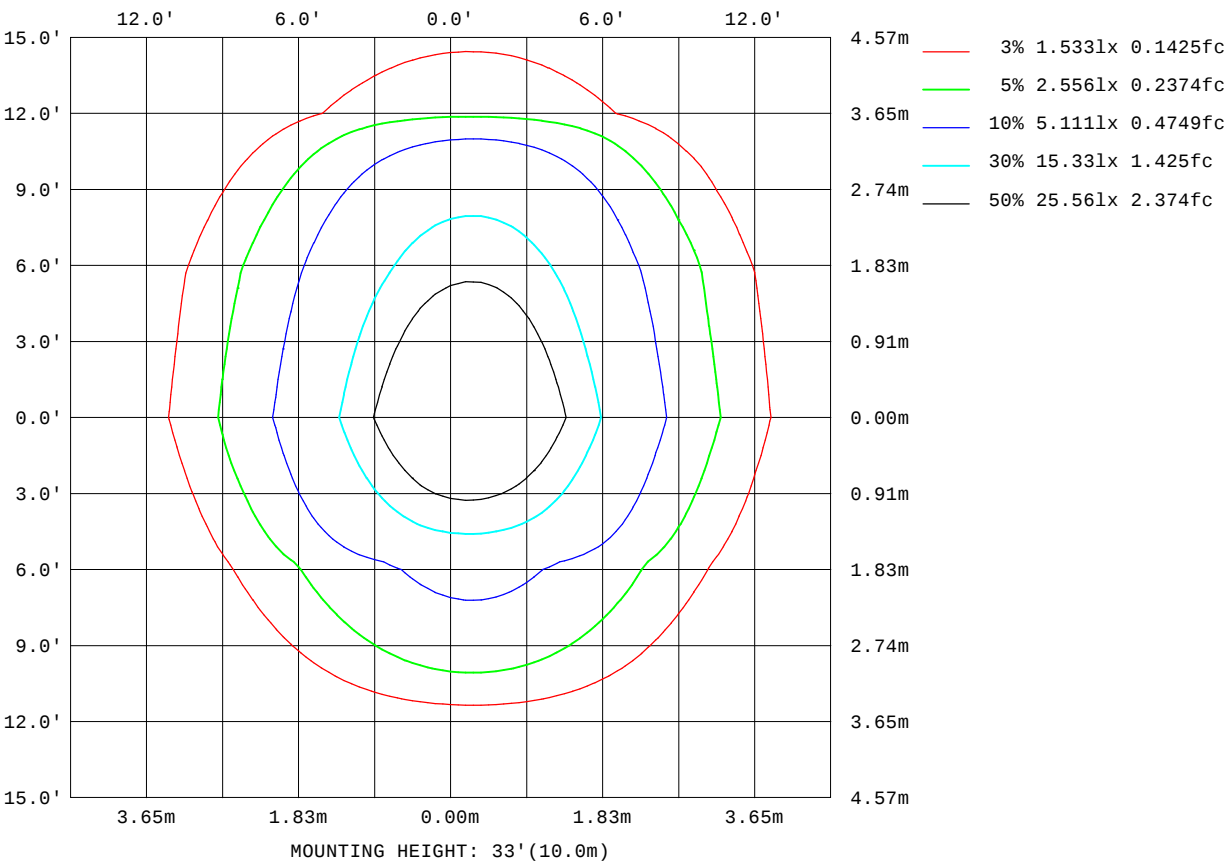

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

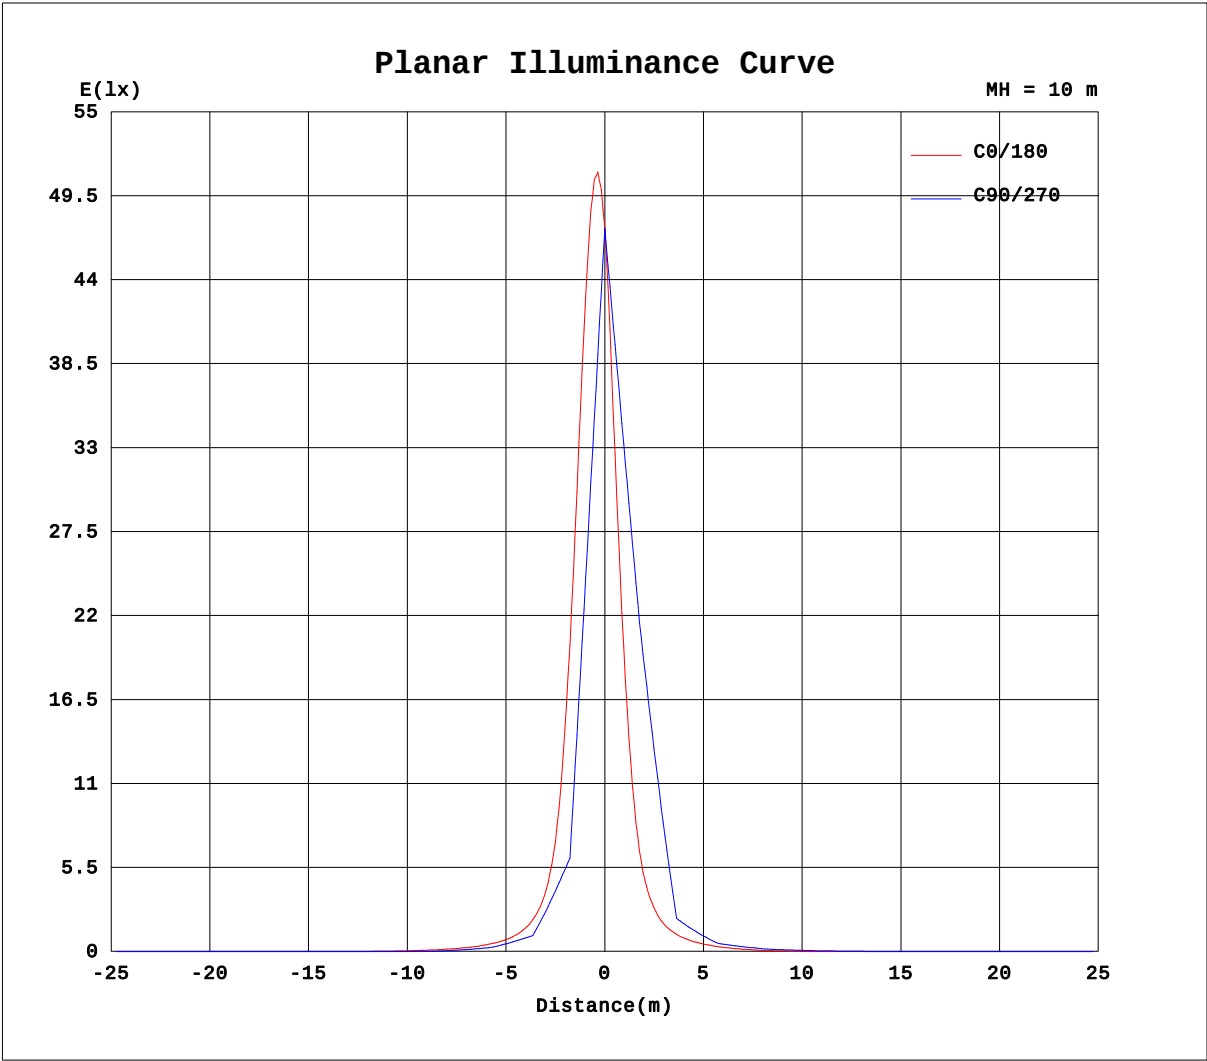


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:277.8V I:0.0840A P:10.81W PF:0.4546 Freq:49.99Hz Lamp Flux:505.148x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080041
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

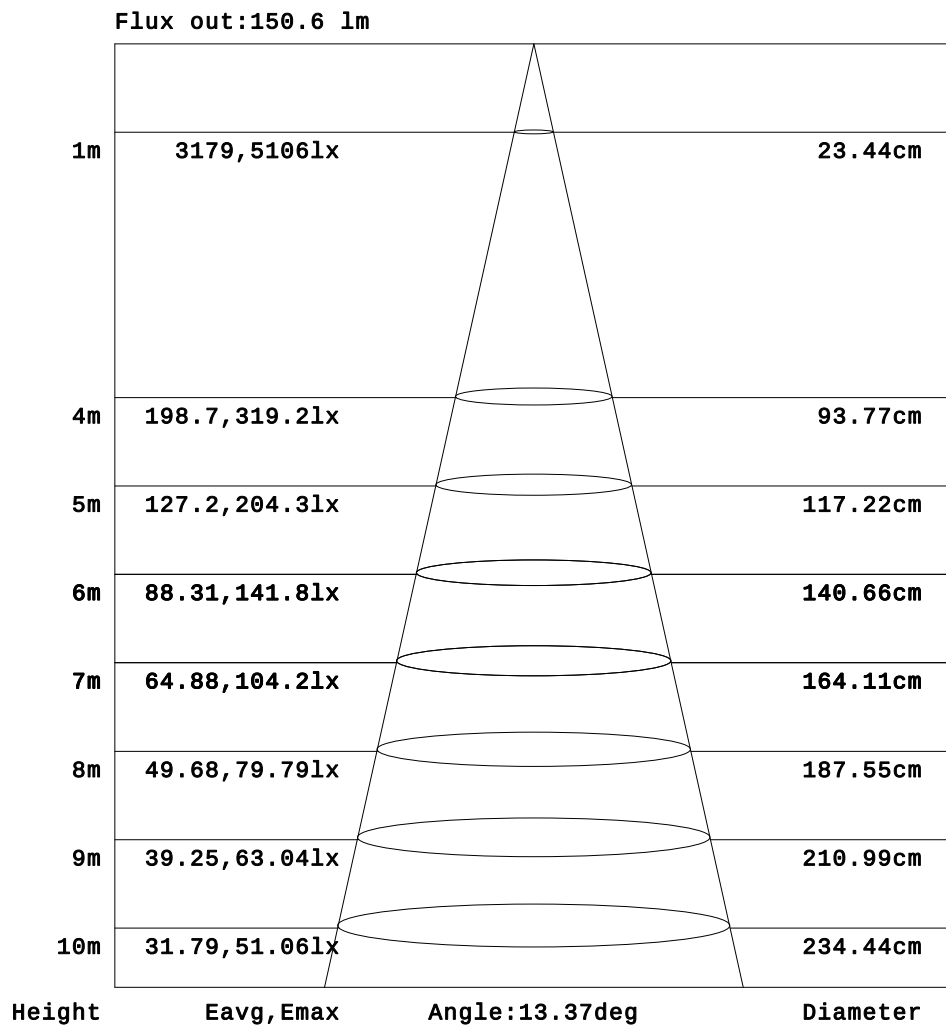

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.8V I:0.0840A P:10.81W PF:0.4546 Freq:49.99Hz Lamp Flux:505.148x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080041
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: cd			
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.53	1.78	2.97	3.93	4.62	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.08	4.53	6.76	8.47	9.64	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.61	3.20	6.26	10.0	14.6	19.0	23.0	25.8	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.11	8.84	15.1	21.6	28.2	34.6	40.2	42.9	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.32	5.49	13.3	22.7	33.1	45.5	59.2	73.9	84.3	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.08	13.5	25.0	38.3	53.9	73.5	95.7	117	130	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.27	6.41	15.2	27.3	43.7	67.5	102	159	253	368	
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.39	13.9	25.7	41.3	66.8	105	170	289	481	667	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.75	11.8	23.5	40.0	64.5	105	183	391	1102	2480	
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.14	7.97	17.7	33.8	55.9	90.3	154	319	877	2728	4994	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.81	13.6	26.7	45.4	72.2	117	210	471	1392	3212	
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.95	7.57	19.1	33.1	54.0	83.5	136	250	553	1390	2392	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.77	12.6	24.0	40.2	60.8	92.4	149	270	592	1165	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.34	14.8	26.6	41.3	59.7	85.0	122	171	229	268	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.44	8.42	16.7	28.5	41.4	57.6	79.0	107	140	169	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.33	7.99	16.2	25.4	35.1	45.9	57.3	68.5	77.8	82.6	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	2.81	8.13	15.8	23.1	30.9	38.9	46.9	53.8	58.3	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.45	6.21	12.0	17.2	22.3	27.0	31.1	34.1	35.7	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.01	4.88	9.14	13.2	16.8	20.0	22.5	24.1	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.28	4.38	7.05	9.27	11.1	12.4	13.1	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.58	3.03	4.21	5.21	5.99	6.59	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.36	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.13	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.8V I:0.0840A P:10.81W PF:0.4546 Freq:49.99Hz Lamp Flux:505.148x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080041
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	5.01	5.06	4.73	3.64	1.91	0.68	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	10.1	10.0	8.83	5.69	2.81	0.37	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	26.0	24.4	22.4	18.6	13.8	9.05	5.10	2.54	0.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	40.3	37.5	33.3	27.6	21.3	13.7	8.08	3.18	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	85.9	78.3	65.8	51.6	39.1	28.2	18.4	10.5	4.31	0.91	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	127	110	87.3	64.8	48.1	34.4	21.6	12.5	5.39	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	399	301	191	121	79.8	53.5	35.1	21.0	11.4	4.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	611	397	230	139	88.1	56.6	36.2	21.1	11.0	3.50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	2777	1533	540	232	126	77.2	49.2	29.9	16.9	7.53	0.78	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	4142	1708	512	218	118	72.0	45.0	27.0	14.5	5.62	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	3642	1989	668	269	140	84.2	53.9	33.5	19.2	9.09	1.62	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	2083	969	384	187	108	68.3	44.7	26.9	15.0	5.97	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	1332	810	354	180	107	69.6	46.6	29.9	17.1	8.09	0.96	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	255	202	146	102	71.2	50.1	34.3	21.3	11.4	4.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	175	152	118	87.6	64.0	46.5	32.7	21.4	11.8	4.86	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	81.4	74.7	64.5	53.0	41.7	31.0	21.7	13.3	6.27	0.77	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	59.2	56.2	50.2	42.6	34.4	26.3	18.8	11.8	5.49	1.45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	35.5	33.4	30.0	25.7	20.7	15.4	10.2	5.13	0.49	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	24.4	23.5	21.5	18.6	15.2	11.3	7.26	3.57	1.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	13.0	12.2	10.8	8.95	6.70	4.03	1.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	6.74	6.42	5.73	4.88	3.83	2.58	1.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.40	0.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.20	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: