

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		9041.5 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	29.9V x 28.0H
	At 50% of Imax	15.1V x 13.7H
	At 90% of Imax	3.9V x 5.4H
Beam Flux	Total	982.6 lumens per klm.
	To 10% of Imax	648.1 lumens per klm.
	To 50% of Imax	296.3 lumens per klm.
	To 90% of Imax	30.0 lumens per klm.
Upward LOR		0.0 %
Downward LOR		98.3 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:277.7V I:0.1049A P:14.48W PF:0.5005 Freq:50.00Hz Lamp Flux:1078.3x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080044
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

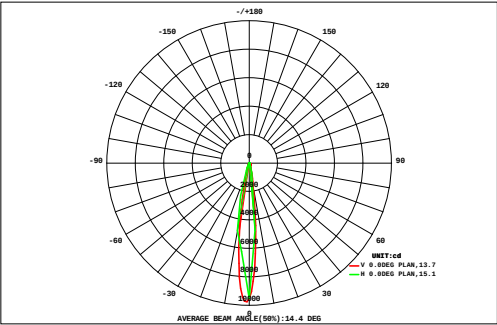

DATA OF LAMP		Eff:74.47lm/W	
MODEL: SP-PZT-R170-12P-RDM-W		Imax(cd)	9749
NOMINAL POWER(W)	14	AVAILABILITY(%)	68.3
RATED VOLTAGE(V)	277	Avai. FLUX(lm)	736.0
NOMINAL FLUX(lm)	1078.3	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1078
TEST VOLTAGE(V)	277	θ @50%(H,V)	14,15DEG


AREA FLUX DIAGRAM																	UNIT:lm			Φ t	Φ a
27	0.29	0.35	0.40	0.47	0.53	0.60	0.68	0.75	0.80	0.83	0.83	0.79	0.72	0.64	0.56	0.48	0.41	0.35	10.5	0.00	
24	0.29	0.36	0.43	0.52	0.63	0.77	0.92	1.09	1.25	1.36	1.37	1.30	1.15	0.98	0.82	0.68	0.56	0.46	14.9	0.00	
21	0.36	0.44	0.54	0.66	0.81	1.00	1.22	1.44	1.62	1.70	1.66	1.50	1.29	1.07	0.87	0.70	0.57	0.46	17.9	0.00	
18	0.44	0.53	0.66	0.81	1.01	1.26	1.53	1.80	1.99	2.05	1.93	1.69	1.41	1.14	0.91	0.72	0.57	0.46	20.9	0.00	
15	0.37	0.47	0.61	0.80	1.09	1.59	2.49	4.20	6.75	8.92	9.23	7.53	4.99	3.01	1.88	1.26	0.90	0.66	56.8	45.1	
12	0.42	0.54	0.71	0.96	1.40	2.16	3.68	6.43	10.0	12.5	12.2	9.38	5.92	3.46	2.11	1.38	0.96	0.70	75.0	63.8	
9	0.54	0.71	0.96	1.37	2.09	3.37	6.15	10.6	15.2	16.7	14.1	9.22	5.14	2.92	1.79	1.18	0.83	0.60	93.5	82.6	
VERTICAL (DEG)	0.47	0.61	0.82	1.15	1.73	2.79	5.11	9.69	15.8	19.9	19.5	14.8	8.90	4.70	2.55	1.55	1.03	0.72	112	101	
	0.38	0.49	0.65	0.88	1.28	2.04	3.75	8.27	15.9	23.1	25.2	20.8	13.1	6.68	3.38	1.97	1.26	0.86	130	120	
	0.53	0.70	0.99	1.47	2.40	4.48	9.66	18.5	26.7	29.0	24.0	15.1	7.39	3.57	1.95	1.23	0.84	0.61	149	139	
	0.50	0.67	0.94	1.38	2.22	4.12	8.81	16.8	24.2	26.3	21.8	13.7	6.82	3.34	1.85	1.18	0.82	0.60	136	126	
	0.32	0.41	0.51	0.64	0.80	0.91	0.94	1.78	4.53	8.36	10.8	10.2	7.25	4.10	2.27	1.43	0.97	0.70	56.9	47.0	
	0.35	0.45	0.56	0.70	0.87	1.00	1.20	1.31	1.26	2.09	3.23	3.56	3.03	2.07	1.38	0.97	0.72	0.54	25.3	10.4	
	0.40	0.51	0.64	0.80	1.01	1.22	1.14	0.37	0.00	0.00	0.00	0.00	0.00	0.10	0.36	0.45	0.43	0.36	7.79	0.00	
	0.25	0.31	0.38	0.46	0.57	0.70	0.88	1.11	1.40	1.68	1.82	1.71	1.45	1.16	0.91	0.71	0.56	0.45	16.5	0.00	
	0.22	0.26	0.31	0.35	0.40	0.44	0.48	0.54	0.66	0.85	1.03	1.08	0.99	0.85	0.70	0.57	0.46	0.38	10.6	0.00	
	0.24	0.28	0.33	0.37	0.41	0.43	0.41	0.34	0.24	0.17	0.14	0.16	0.19	0.25	0.27	0.27	0.25	0.23	4.98	0.00	
-27	0.19	0.22	0.26	0.29	0.32	0.34	0.34	0.31	0.32	0.33	0.34	0.33	0.31	0.29	0.29	0.27	0.25	0.22	5.21	0.00	
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)				6	9	12	15	18	21	24	27	
Φ t	6.56	8.31	10.7	14.1	19.6	29.2	49.4	85.3	129	156	149	113	70.0	40.3	24.9	17.0	12.4	9.37	944	---	
Φ a	0.00	0.00	0.00	0.00	2.58	13.7	37.3	75.7	119	146	139	104	61.9	30.5	6.58	0.00	0.00	0.00	---	736	

one-half-peak spread: U:5.0,D:10.2 , L:6.6,R: NEMA Beam Type: Type 2 x 3 (H x V)

H(β) Range:-90 - 90DEG	V(B) Range:-80 - 80DEG
H(β) Interval: 1.0DEG	V(B) Interval: 5.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Temperature:28.0DEG	Humidity:83%
Operators:QC1	Test Distance:8.300m [K=1.0000]
Test Date:2025-08-05	Remarks:

ISOCANDELA DIAGRAM

Test:U:277.7V I:0.1049A P:14.48W PF:0.5005 Freq:50.00Hz Lamp Flux:1078.3x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080044
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

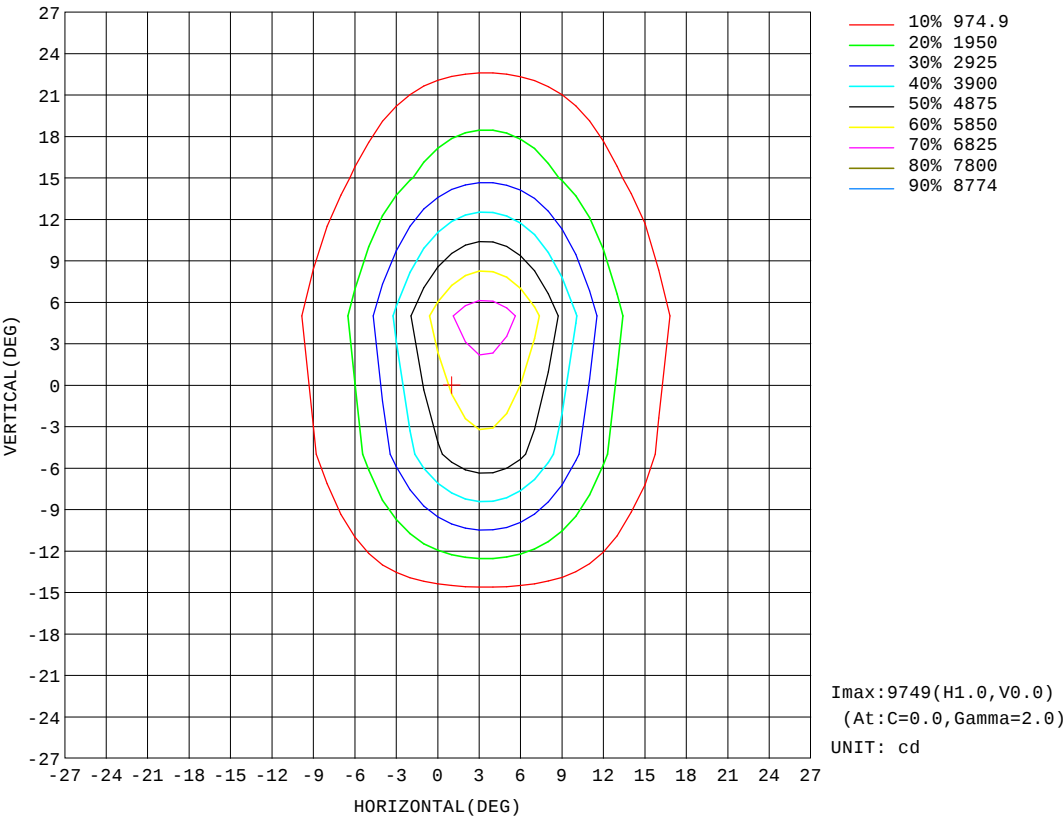


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:277.7V I:0.1049A P:14.48W PF:0.5005 Freq:50.00Hz Lamp Flux:1078.3x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080044
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

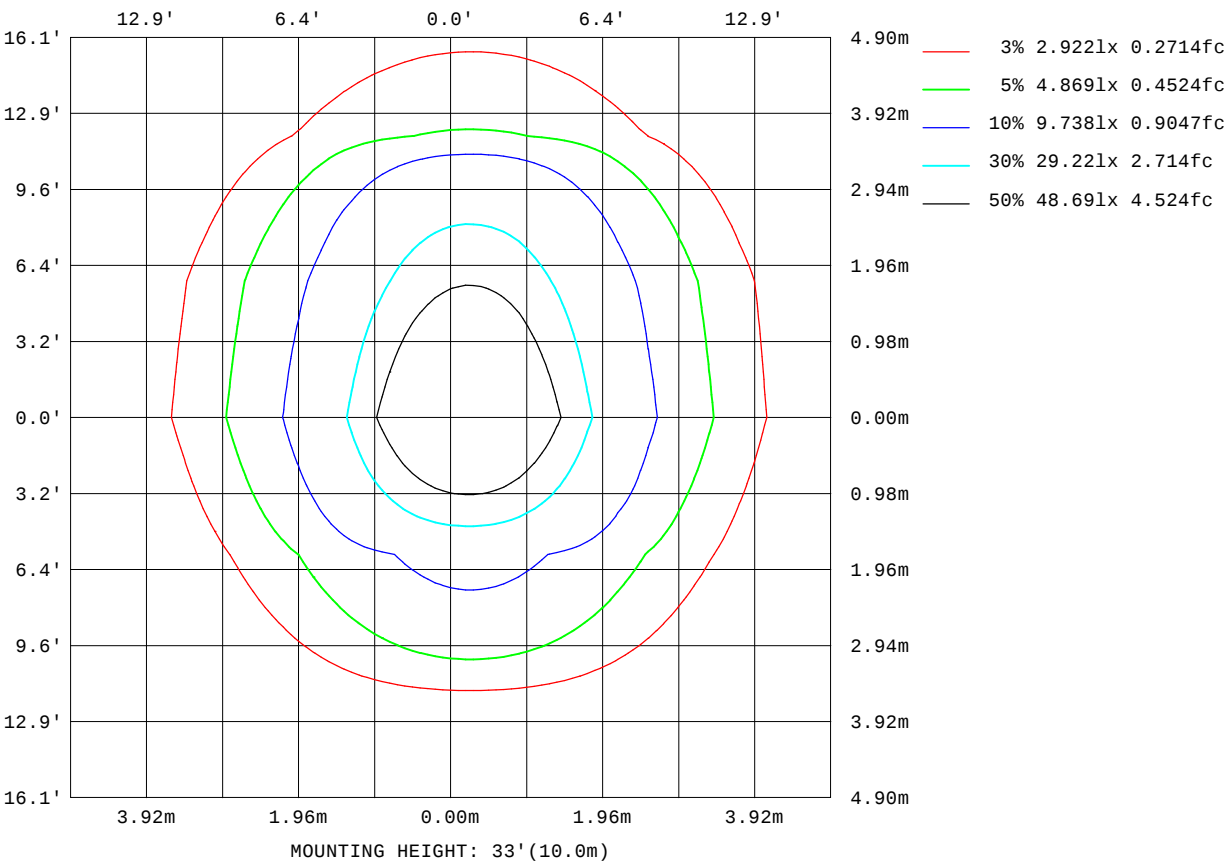

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

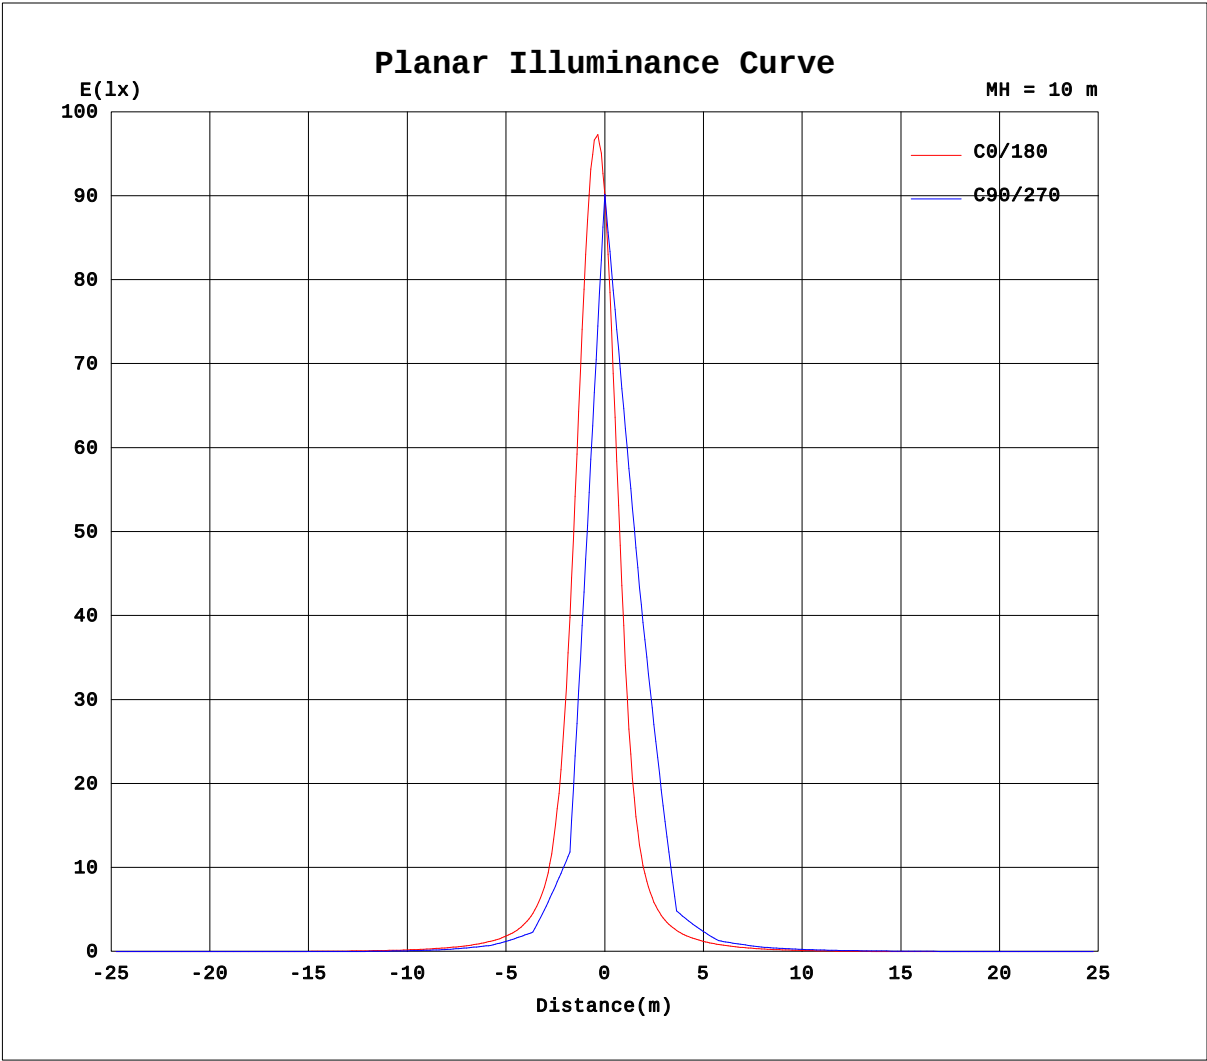


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:277.7V I:0.1049A P:14.48W PF:0.5005 Freq:50.00Hz Lamp Flux:1078.3x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080044
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

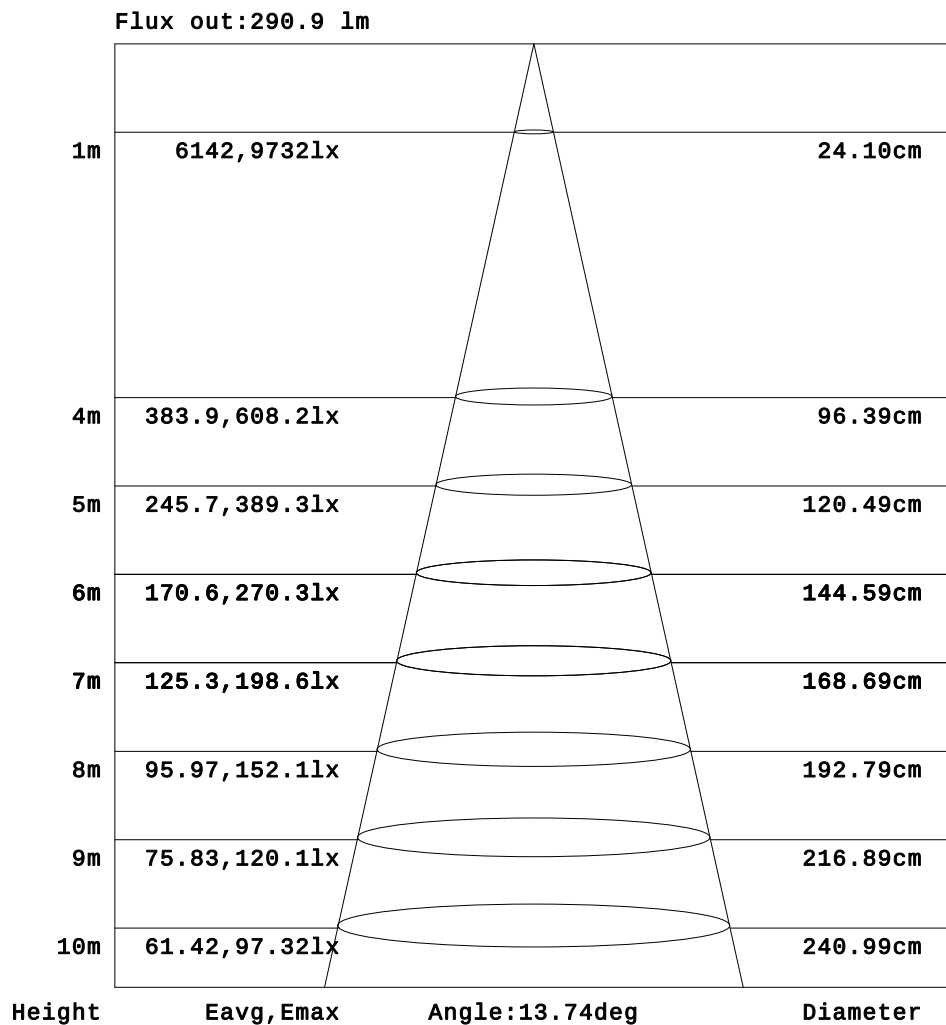

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.7V I:0.1049A P:14.48W PF:0.5005 Freq:50.00Hz Lamp Flux:1078.3x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080044
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1

UNIT: cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.74	2.42	4.04	5.83	7.05
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.86	6.13	9.47	12.9	14.6	15.0
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.40	5.88	9.11	12.8	17.9	22.5	27.0	30.1	31.6
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.80	7.58	14.4	20.6	26.8	33.4	39.3	44.1	47.1	48.6
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.90	5.88	12.4	20.5	29.5	39.2	49.7	59.8	69.0	76.9	81.8
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	6.85	15.1	23.6	33.5	46.1	59.9	74.2	88.0	101	112	117
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.50	8.01	16.8	26.8	39.4	55.7	74.9	96.6	122	149	177	197
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.51	15.9	26.1	39.4	57.6	80.0	107	138	177	219	261	285
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.44	15.1	26.6	40.9	60.2	85.4	118	165	232	342	521	730
-10	0.00	0.00	0.00	0.00	0.00	0.00	1.93	11.9	22.9	37.6	56.5	81.9	115	165	239	363	592	953	1283
-5	0.00	0.00	0.00	0.00	0.00	0.00	5.55	9.76	20.9	34.8	52.9	77.8	111	160	241	395	782	2132	4746
0	0.00	0.00	0.00	0.00	0.00	0.00	5.17	16.4	29.0	45.1	67.0	98.6	143	212	342	647	1669	5357	9515
5	0.00	0.00	0.00	0.00	0.00	0.00	1.28	12.1	24.0	38.3	57.9	84.8	122	177	268	453	946	2702	6243
10	0.00	0.00	0.00	0.00	0.00	0.00	5.85	17.0	29.5	45.5	68.3	98.2	140	203	310	535	1112	2778	4795
15	0.00	0.00	0.00	0.00	0.00	0.00	1.03	11.6	23.0	36.6	55.3	79.5	112	156	221	335	576	1199	2375
20	0.00	0.00	0.00	0.00	0.00	0.00	4.80	14.9	26.5	41.4	60.2	84.7	115	154	207	281	387	511	597
25	0.00	0.00	0.00	0.00	0.00	0.00	0.30	8.50	18.7	31.0	46.2	64.6	88.2	116	151	195	254	324	387
30	0.00	0.00	0.00	0.00	0.00	0.00	1.10	9.82	19.9	32.3	45.8	62.7	82.0	103	127	151	174	194	205
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.52	12.1	22.6	33.8	46.2	61.3	77.3	94.3	112	128	143	152
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.67	11.8	21.7	31.1	41.5	53.1	64.6	75.6	85.8	94.5	101	104
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.39	4.20	12.1	20.5	28.7	37.8	46.9	55.6	63.5	70.3	75.5	78.7
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.22	9.49	16.4	22.9	30.0	36.4	42.1	46.9	50.7	53.4	54.8
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	3.20	7.09	12.7	18.2	23.9	29.0	33.3	36.7	39.3	40.7
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.38	6.77	11.2	15.7	19.4	22.6	25.0	26.5	27.3
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.26	2.54	4.68	6.98	8.99	11.3	13.5	15.2	16.2
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.80	3.55	4.81	5.40
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.53	1.44	2.18	2.62
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
 H(β) Interval: 1.0DEG
 Test Speed: HIGH
 Temperature:28.0DEG
 Operators:QC1
 Test Date:2025-08-05

V(B) Range:-80 - 80DEG
 V(B) Interval: 5.0DEG
 Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
 Humidity:83%
 Test Distance:8.300m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.7V I:0.1049A P:14.48W PF:0.5005 Freq:50.00Hz Lamp Flux:1078.3x1 lm		
NAME: 8.03.034.0003 10° SP-PZT-R170-12P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080044
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																		UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	7.35	6.72	6.00	5.10	3.97	2.68	1.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	14.2	12.9	11.3	9.35	6.94	4.25	1.37	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	31.7	30.7	28.9	25.7	21.4	17.0	12.5	8.11	5.06	2.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	48.5	47.4	44.2	38.7	32.4	26.2	20.0	13.7	7.77	1.86	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-35	82.3	79.1	73.5	65.1	55.0	44.7	34.9	25.9	17.8	10.4	3.82	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-30	114	107	96.6	83.6	69.6	55.1	42.4	31.3	21.8	12.9	4.32	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-25	201	187	162	134	107	84.4	64.3	47.5	33.8	22.5	12.2	3.05	0.00	0.00	0.00	0.00	0.00	0.00	
-20	280	248	205	161	126	97.1	72.0	52.0	36.3	23.7	12.4	2.19	0.00	0.00	0.00	0.00	0.00	0.00	
-15	786	615	415	276	191	137	99.2	70.5	49.6	33.8	20.7	9.56	0.80	0.00	0.00	0.00	0.00	0.00	
-10	1189	810	496	310	208	144	101	70.7	49.2	32.8	19.8	8.33	0.00	0.00	0.00	0.00	0.00	0.00	
-5	5338	3038	1136	506	289	187	128	89.2	61.9	41.6	26.5	14.4	3.23	0.00	0.00	0.00	0.00	0.00	
0	8023	3324	1058	479	274	178	120	83.7	56.7	37.3	23.1	11.3	0.32	0.00	0.00	0.00	0.00	0.00	
5	7082	3949	1403	590	321	204	139	97.1	67.2	45.3	28.8	16.1	5.30	0.00	0.00	0.00	0.00	0.00	
10	4166	1955	824	423	255	171	121	84.0	58.6	38.7	23.8	11.9	1.71	0.00	0.00	0.00	0.00	0.00	
15	2686	1650	764	412	256	175	125	90.0	63.1	43.6	27.7	15.1	4.86	0.00	0.00	0.00	0.00	0.00	
20	574	463	342	247	182	134	99.7	72.0	50.9	34.8	20.8	9.59	0.33	0.00	0.00	0.00	0.00	0.00	
25	401	354	282	217	166	127	96.9	72.5	52.0	36.6	23.5	11.8	2.55	0.00	0.00	0.00	0.00	0.00	
30	203	188	167	142	117	93.9	73.5	55.4	39.9	27.8	16.1	6.09	0.00	0.00	0.00	0.00	0.00	0.00	
35	155	148	135	119	101	83.7	67.2	52.1	38.3	27.1	16.9	6.81	0.57	0.00	0.00	0.00	0.00	0.00	
40	103	98.7	91.6	82.0	71.2	59.9	48.4	37.4	27.3	18.2	8.88	0.96	0.00	0.00	0.00	0.00	0.00	0.00	
45	79.4	77.3	73.0	66.8	59.4	51.0	42.1	33.2	24.2	16.3	8.40	1.92	0.00	0.00	0.00	0.00	0.00	0.00	
50	54.7	53.1	50.0	46.0	41.1	35.1	28.7	21.6	14.7	8.12	1.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
55	41.1	40.4	38.5	35.6	31.9	27.4	22.3	16.5	10.7	5.40	1.99	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	27.3	26.4	24.9	22.5	19.4	15.7	11.4	6.72	2.37	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	16.4	16.0	15.0	13.3	11.1	8.58	6.63	4.26	2.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	5.38	4.91	3.92	2.42	0.65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	2.72	2.58	2.20	1.54	0.69	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-05

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: