


Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)		11175.0 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	31.1V x 27.0H
	At 50% of Imax	10.4V x 12.6H
	At 90% of Imax	3.5V x 4.9H
Beam Flux	Total	985.4 lumens per klm.
	To 10% of Imax	663.4 lumens per klm.
	To 50% of Imax	275.8 lumens per klm.
	To 90% of Imax	27.3 lumens per klm.
Upward LOR		0.0 %
Downward LOR		98.5 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.1V I:0.1213A P:9.017W PF:0.6139 Freq:50.00Hz Lamp Flux:538.367x1 lm		
NAME: 8.03.035.0004 10° SP-PZT-R135-6P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070079
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

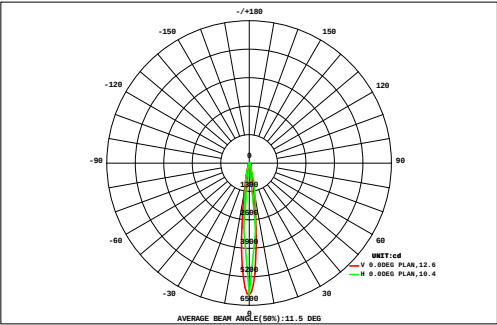

DATA OF LAMP		Eff:59.71lm/W	
MODE:SP-PZT-R135-6P-RDM-G		Imax(cd)	6016
NOMINAL POWER(W)	9	AVAILABILITY(%)	71.4
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	384.3
NOMINAL FLUX(lm)	538.367	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	538.4
TEST VOLTAGE(V)	120	θ @50%(H,V)	13,10DEG

AREA FLUX DIAGRAM																UNIT:lm			Φ t	Φ a
27	0.11	0.14	0.16	0.19	0.21	0.24	0.26	0.28	0.30	0.30	0.30	0.29	0.26	0.24	0.21	0.18	0.15	0.13	3.96	0.00
24	0.11	0.14	0.17	0.21	0.25	0.30	0.35	0.40	0.44	0.46	0.47	0.45	0.42	0.37	0.32	0.27	0.23	0.19	5.56	0.00
21	0.15	0.19	0.24	0.29	0.34	0.41	0.47	0.52	0.56	0.57	0.55	0.51	0.46	0.39	0.33	0.27	0.22	0.18	6.67	0.00
18	0.20	0.25	0.30	0.37	0.44	0.52	0.59	0.65	0.68	0.68	0.64	0.57	0.49	0.41	0.34	0.27	0.22	0.17	7.80	0.00
15	0.16	0.21	0.27	0.36	0.47	0.64	0.88	1.24	1.66	2.01	2.05	1.76	1.35	0.99	0.73	0.53	0.40	0.30	16.0	6.48
12	0.19	0.25	0.34	0.45	0.62	0.88	1.28	1.81	2.37	2.70	2.59	2.11	1.57	1.13	0.81	0.58	0.43	0.32	20.5	12.0
9	0.28	0.38	0.51	0.70	0.98	1.44	2.09	2.89	3.49	3.45	2.78	1.98	1.37	0.94	0.65	0.47	0.34	0.25	25.0	16.9
VERTICAL(DEG)	0.24	0.32	0.43	0.59	0.86	1.33	2.25	3.90	6.34	8.34	8.22	6.15	3.69	2.01	1.16	0.74	0.51	0.36	47.4	40.7
	0.18	0.24	0.32	0.45	0.69	1.17	2.36	4.95	9.45	13.8	14.3	10.8	6.28	3.20	1.73	1.05	0.69	0.48	72.1	66.2
	0.32	0.44	0.62	0.99	1.73	3.49	7.19	13.3	18.4	18.0	12.6	6.60	3.00	1.52	0.92	0.60	0.42	0.29	90.5	84.5
	0.31	0.42	0.60	0.94	1.63	3.27	6.71	12.4	17.4	17.4	12.6	6.87	3.24	1.65	0.99	0.64	0.44	0.30	87.9	81.9
	0.16	0.21	0.27	0.33	0.39	0.37	0.45	0.91	3.03	7.11	9.41	8.21	5.19	2.78	1.54	0.95	0.63	0.44	42.4	36.9
	0.21	0.28	0.37	0.49	0.66	0.97	1.50	2.16	2.68	3.85	4.45	3.82	2.58	1.56	0.96	0.64	0.45	0.32	27.9	21.4
	0.27	0.36	0.49	0.70	1.03	1.55	2.27	2.87	2.42	0.84	0.11	0.00	0.04	0.18	0.28	0.27	0.23	0.18	14.1	8.45
	0.12	0.15	0.20	0.26	0.33	0.42	0.55	0.79	1.28	1.93	2.27	2.01	1.47	1.02	0.73	0.52	0.38	0.28	14.7	6.68
	0.09	0.12	0.15	0.19	0.19	0.18	0.17	0.18	0.28	0.78	1.30	1.36	1.07	0.78	0.59	0.43	0.32	0.23	8.42	2.22
	0.13	0.17	0.23	0.28	0.32	0.35	0.33	0.21	0.09	0.03	0.01	0.03	0.06	0.11	0.14	0.13	0.10	0.08	2.81	0.00
-27	0.08	0.11	0.15	0.18	0.21	0.23	0.22	0.20	0.22	0.24	0.24	0.24	0.22	0.20	0.17	0.16	0.13	0.10	3.31	0.00
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)				6	9	12	15	18	21	24	27
Φ t	3.32	4.38	5.84	7.97	11.4	17.8	29.9	49.6	71.2	82.5	74.9	53.8	32.8	19.5	12.6	8.73	6.28	4.61	497	---
Φ a	0.00	0.00	0.00	0.00	2.49	7.96	24.6	44.0	66.7	78.7	72.0	50.7	24.2	10.3	2.64	0.00	0.00	0.00	---	384


one-half-peak spread: U:5.5,D:5.0 , L:6.1,R:6.1,NEMA Beam Type: Type 2 x 3 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.1V I:0.1213A P:9.017W PF:0.6139 Freq:50.00Hz Lamp Flux:538.367x1 lm		
NAME: 8.03.035.0004 10° SP-PZT-R135-6P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070079
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

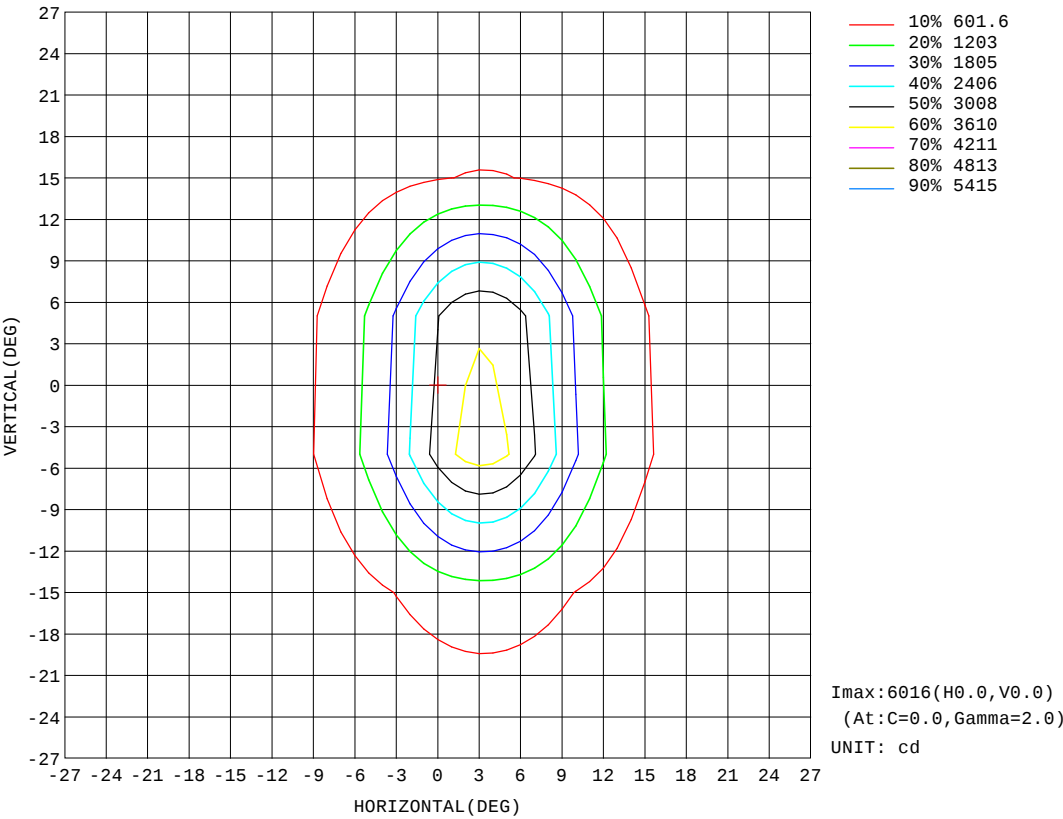


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:120.1V I:0.1213A P:9.017W PF:0.6139 Freq:50.00Hz Lamp Flux:538.367x1 lm		
NAME: 8.03.035.0004 10° SP-PZT-R135-6P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070079
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

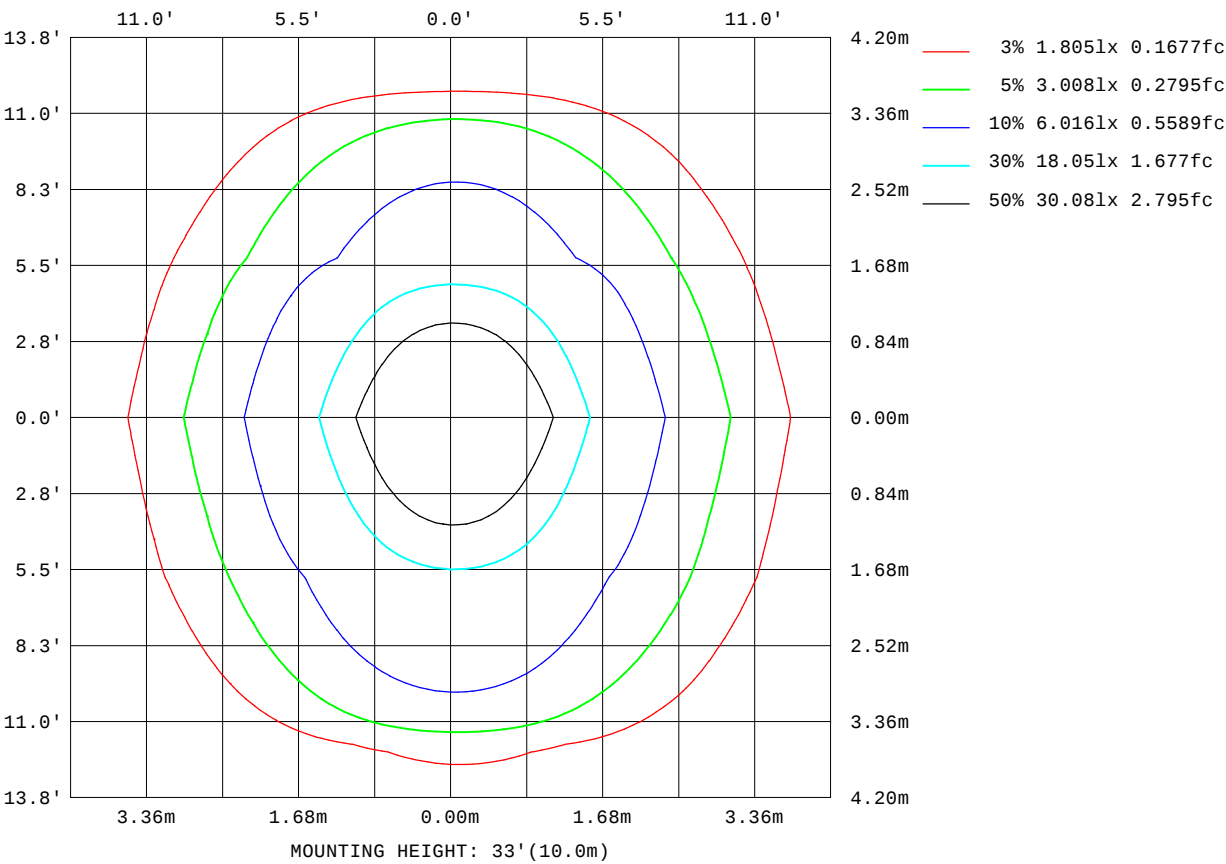

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

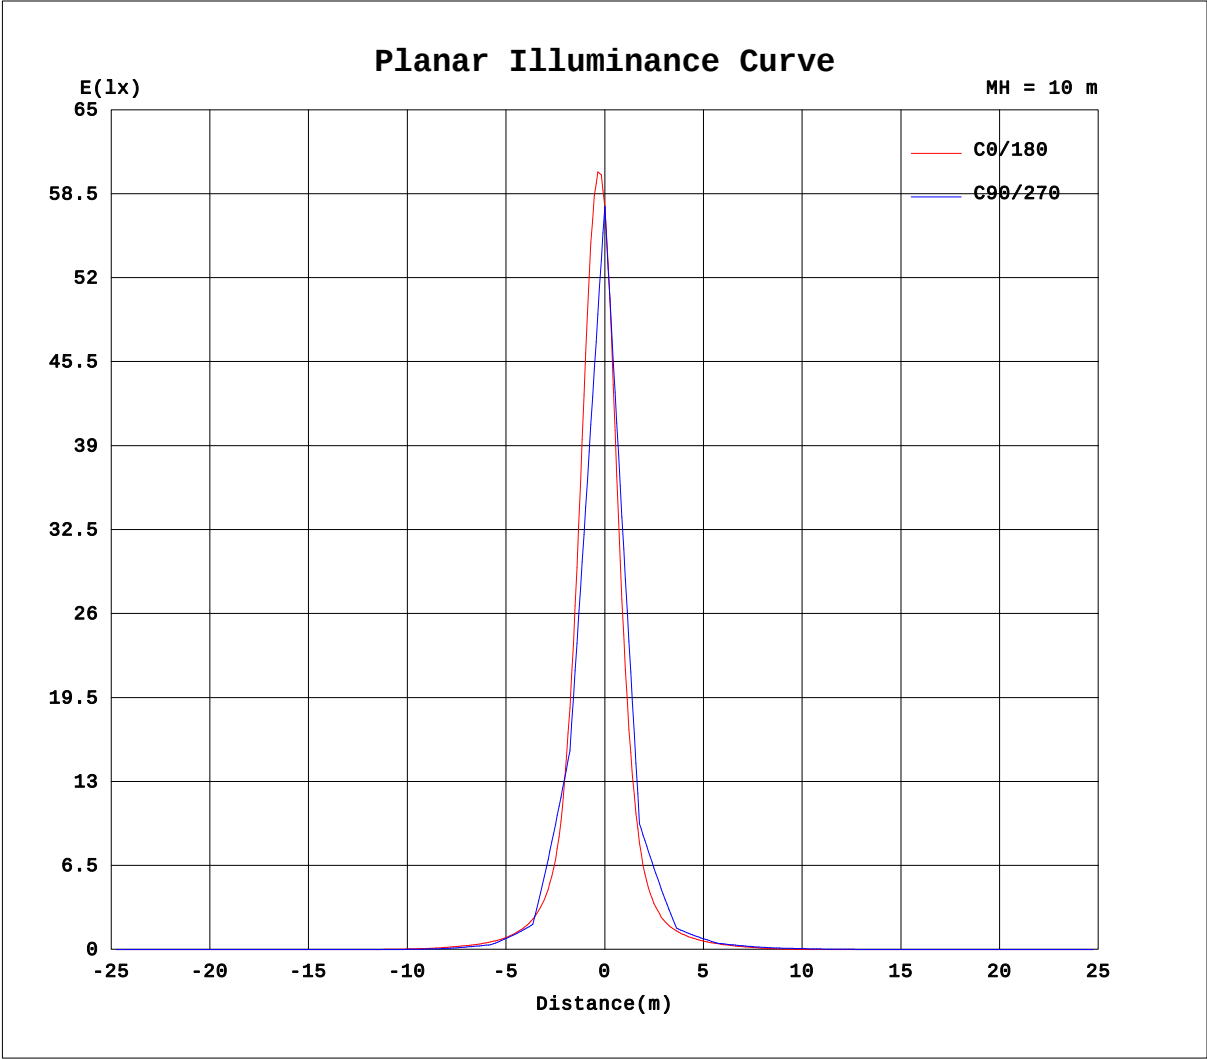


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.1V I:0.1213A P:9.017W PF:0.6139 Freq:50.00Hz Lamp Flux:538.367x1 lm		
NAME: 8.03.035.0004 10° SP-PZT-R135-6P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070079
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

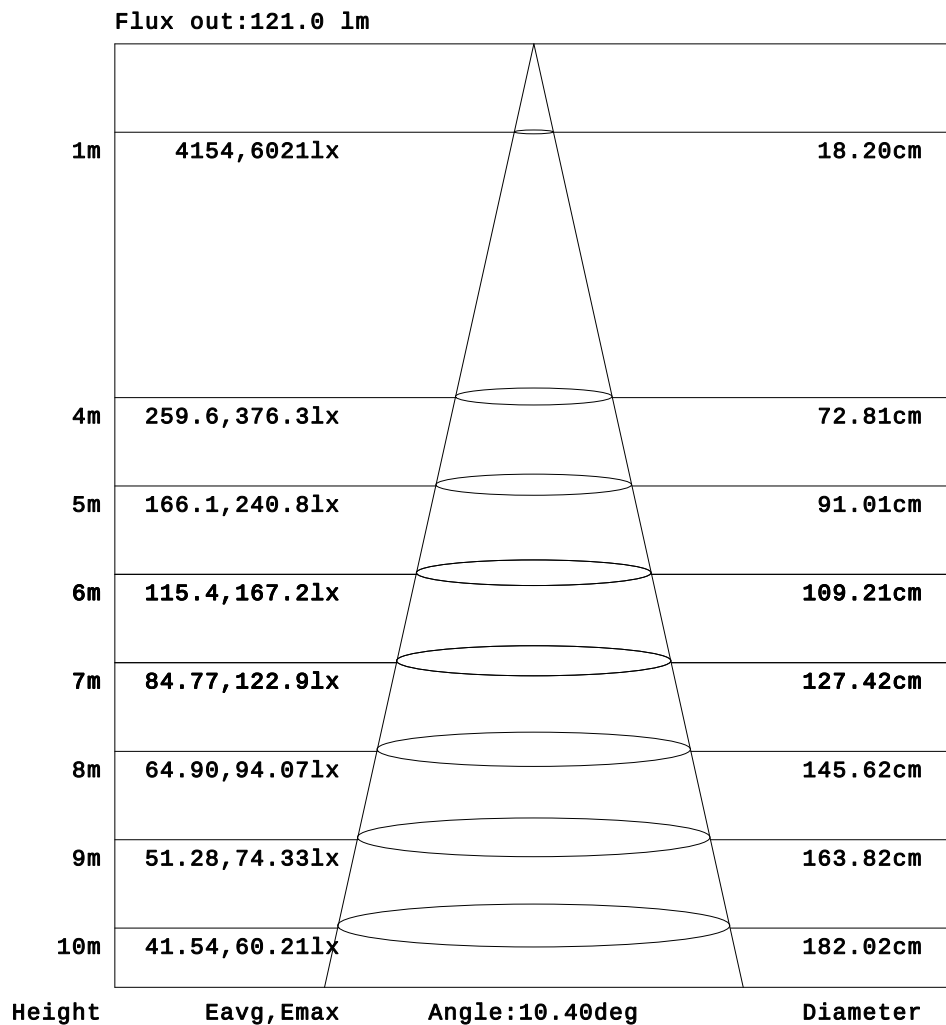

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.1213A P:9.017W PF:0.6139 Freq:50.00Hz Lamp Flux:538.367x1 lm		
NAME: 8.03.035.0004 10° SP-PZT-R135-6P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070079
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: cd			
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.87	2.99	5.53	6.94	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.46	4.00	9.44	12.9	15.1	16.1	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.68	3.83	8.15	15.4	22.6	30.1	35.2	37.6	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	4.94	12.3	24.3	35.1	45.3	54.1	58.9	59.9	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.62	7.11	16.7	30.4	48.3	71.8	96.5	123	145	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.79	9.51	19.3	37.3	56.8	89.3	127	171	216	239	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.62	7.87	17.6	37.2	61.7	95.0	152	256	477	838	
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.82	7.31	16.5	36.8	66.4	102	162	284	565	1165	1681	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.22	12.5	28.8	54.5	86.5	136	233	497	1368	3236	
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.53	10.1	25.3	50.0	78.8	124	206	429	1238	3690	6016	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.14	15.2	34.3	56.8	87.3	136	229	472	1275	2983	
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.34	11.0	25.2	45.0	68.5	103	159	256	454	797	1055	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.43	14.1	29.1	46.2	67.9	99.0	147	227	373	568	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.86	8.78	19.1	33.4	48.4	67.3	91.5	122	157	188	202	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.12	9.28	19.5	31.1	43.8	59.2	77.7	98.9	120	136	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.96	10.4	19.8	28.5	38.1	48.3	58.4	67.3	73.7	76.5	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.24	3.34	9.44	17.1	24.0	31.3	38.7	45.5	50.9	54.3	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.92	8.39	14.0	18.7	23.2	27.4	30.5	32.6	33.6	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.17	2.45	5.52	9.82	13.5	16.8	19.6	21.5	22.7	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.32	5.48	7.78	9.68	11.1	11.9	12.3	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	1.88	3.23	4.30	5.15	5.73	6.08	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.1V I:0.1213A P:9.017W PF:0.6139 Freq:50.00Hz Lamp Flux:538.367x1 lm		
NAME: 8.03.035.0004 10° SP-PZT-R135-6P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070079
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	8.10	7.63	6.51	4.34	2.00	0.42	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	15.8	14.0	10.9	5.53	2.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	38.6	38.4	34.4	27.4	19.5	11.5	5.96	2.37	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	61.9	58.8	50.2	39.5	27.9	15.3	7.43	1.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	150	136	111	84.4	58.1	37.2	21.8	10.7	4.10	0.86	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	225	184	140	97.8	61.9	40.2	21.3	11.3	4.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	927	592	326	192	117	73.1	44.7	22.4	11.3	3.84	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	1258	638	332	187	114	70.7	38.8	18.7	8.98	2.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	3651	1864	670	308	170	101	62.5	34.0	16.0	6.89	0.59	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	4027	1384	485	237	133	80.8	50.5	24.7	11.1	3.53	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	3356	1727	629	294	165	100.0	63.7	39.1	18.6	7.87	1.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	850	506	288	173	109	71.3	46.7	25.6	11.9	3.54	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	614	442	277	173	114	76.4	51.9	33.3	17.2	6.94	0.53	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	192	163	127	94.7	69.5	50.0	34.6	19.3	9.52	1.68	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	139	128	107	85.0	65.3	48.8	35.3	22.7	11.9	4.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	74.8	69.1	60.6	50.7	40.6	30.8	21.5	11.7	5.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	55.0	52.8	48.2	41.9	34.8	27.4	20.1	12.0	5.47	1.18	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	33.2	31.5	28.5	24.7	20.2	15.3	9.14	3.91	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	23.0	22.4	20.9	18.5	15.5	11.8	7.29	3.42	1.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	12.3	11.8	10.6	8.84	6.46	3.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	6.18	6.07	5.69	4.99	3.98	2.62	0.80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: