

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)	11702.7 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
---	---

Beam Spread	At 10% of Imax	32.8V x 26.8H
	At 50% of Imax	12.7V x 13.5H
	At 90% of Imax	4.4V x 5.5H

Beam Flux	Total	992.0 lumens per klm.
	To 10% of Imax	726.6 lumens per klm.
	To 50% of Imax	319.3 lumens per klm.
	To 90% of Imax	32.3 lumens per klm.

Upward LOR	0.0 %
Downward LOR	99.2 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-30

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.0V I:0.0976A P:7.010W PF:0.5935 Freq:50.01Hz Lamp Flux:266.847x1 lm		
NAME: 8.03.035.0004 10° SP-PZT-R135-6P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070077
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

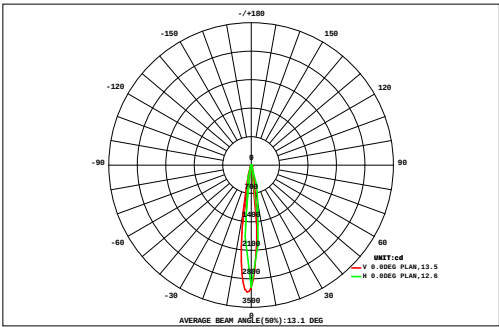

DATA OF LAMP		Eff:38.07lm/W	
MODE:SP-PZT-R135-6P-RDM-R		Imax(cd)	3123
NOMINAL POWER(W)	7	AVAILABILITY(%)	75.1
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	200.5
NOMINAL FLUX(lm)	266.847	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	266.8
TEST VOLTAGE(V)	120	θ @50%(H,V)	13,13DEG


		AREA FLUX DIAGRAM															UNIT:lm			Φ t	Φ a
VERTICAL (DEG)	27	0.03	0.04	0.05	0.06	0.08	0.09	0.10	0.11	0.12	0.12	0.12	0.12	0.11	0.09	0.08	0.07	0.05	0.04	1.48	0.00
	24	0.04	0.06	0.07	0.09	0.11	0.14	0.16	0.18	0.20	0.20	0.20	0.19	0.17	0.14	0.12	0.09	0.07	0.06	2.29	0.00
	21	0.05	0.07	0.09	0.11	0.14	0.17	0.20	0.23	0.25	0.26	0.25	0.23	0.20	0.17	0.14	0.11	0.09	0.07	2.83	0.00
	18	0.06	0.08	0.10	0.13	0.16	0.20	0.24	0.27	0.30	0.31	0.30	0.28	0.24	0.21	0.17	0.13	0.10	0.08	3.37	0.00
	15	0.07	0.10	0.13	0.18	0.25	0.36	0.52	0.74	0.96	1.07	1.00	0.79	0.56	0.39	0.27	0.20	0.14	0.10	7.84	3.16
	12	0.08	0.11	0.16	0.22	0.31	0.45	0.67	0.97	1.29	1.46	1.35	1.05	0.72	0.49	0.34	0.24	0.17	0.12	10.2	6.13
	9	0.09	0.13	0.18	0.25	0.36	0.55	0.82	1.21	1.63	1.84	1.70	1.31	0.89	0.59	0.40	0.28	0.19	0.13	12.5	8.63
	6	0.10	0.14	0.19	0.29	0.44	0.77	1.46	2.65	3.94	4.53	4.08	2.79	1.57	0.84	0.49	0.31	0.21	0.14	24.9	21.7
	3	0.10	0.14	0.21	0.32	0.52	1.01	2.16	4.25	6.50	7.51	6.72	4.43	2.33	1.10	0.58	0.35	0.23	0.15	38.6	35.7
	0	0.10	0.15	0.22	0.35	0.59	1.20	2.67	5.39	8.31	9.63	8.59	5.61	2.88	1.31	0.67	0.39	0.24	0.16	48.5	45.7
	-3	0.10	0.15	0.22	0.35	0.59	1.18	2.60	5.24	8.08	9.36	8.36	5.47	2.82	1.29	0.66	0.39	0.24	0.16	47.3	44.4
	-6	0.09	0.12	0.18	0.27	0.42	0.71	1.31	2.37	3.56	4.12	3.70	2.55	1.47	0.79	0.47	0.30	0.20	0.14	22.8	19.7
-9	0.08	0.12	0.16	0.24	0.36	0.56	0.87	1.39	2.02	2.35	2.12	1.57	1.01	0.63	0.41	0.27	0.19	0.13	14.5	10.8	
-12	0.08	0.11	0.15	0.21	0.30	0.40	0.44	0.41	0.49	0.58	0.54	0.58	0.56	0.46	0.35	0.24	0.17	0.12	6.19	1.38	
-15	0.05	0.08	0.11	0.16	0.22	0.32	0.48	0.72	0.99	1.13	1.03	0.79	0.54	0.36	0.25	0.18	0.13	0.09	7.63	3.14	
-18	0.04	0.06	0.09	0.12	0.16	0.20	0.26	0.33	0.40	0.43	0.41	0.35	0.28	0.22	0.17	0.13	0.10	0.07	3.83	0.00	
-21	0.03	0.04	0.06	0.08	0.09	0.08	0.06	0.03	0.00	0.00	0.00	0.02	0.05	0.08	0.09	0.09	0.07	0.05	0.92	0.00	
-24	0.02	0.03	0.05	0.06	0.07	0.07	0.08	0.10	0.11	0.11	0.11	0.10	0.09	0.08	0.08	0.07	0.05	0.04	1.30	0.00	
-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)					6	9	12	15	18	21	24	27
Φ t	1.21	1.72	2.43	3.49	5.18	8.48	15.1	26.6	39.1	45.0	40.6	28.2	16.5	9.27	5.74	3.84	2.65	1.85	257	---	
Φ a	0.00	0.00	0.00	0.00	0.00	3.58	11.0	23.6	37.1	43.4	38.7	25.7	12.6	4.41	0.29	0.00	0.00	0.00	---	200	

one-half-peak spread: U:6.9,D:5.9 , L:7.2,R:6.6MMA Beam Type: Type 2 x 3 (H x V)

H(β) Range:-90 - 90DEG H(β) Interval: 1.0DEG Test Speed: HIGH Temperature:28.0DEG Operators:QC1 Test Date:2025-07-30	V(B) Range:-80 - 80DEG V(B) Interval: 5.0DEG Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354 Humidity:83% Test Distance:8.300m [K=1.0000] Remarks:
--	---

ISOCANDELA DIAGRAM

Test:U:120.0V I:0.0976A P:7.010W PF:0.5935 Freq:50.01Hz Lamp Flux:266.847x1 lm		
NAME: 8.03.035.0004 10° SP-PZT-R135-6P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070077
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

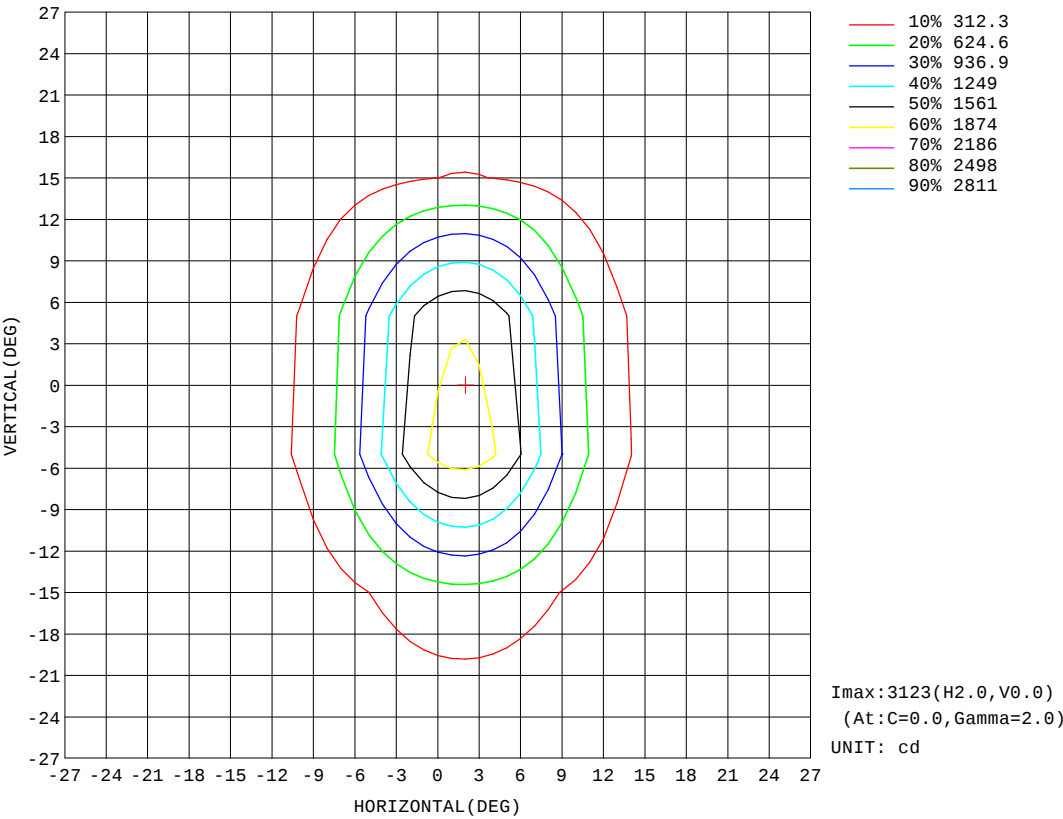


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-30

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:120.0V I:0.0976A P:7.010W PF:0.5935 Freq:50.01Hz Lamp Flux:266.847x1 lm		
NAME: 8.03.035.0004 10° SP-PZT-R135-6P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070077
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

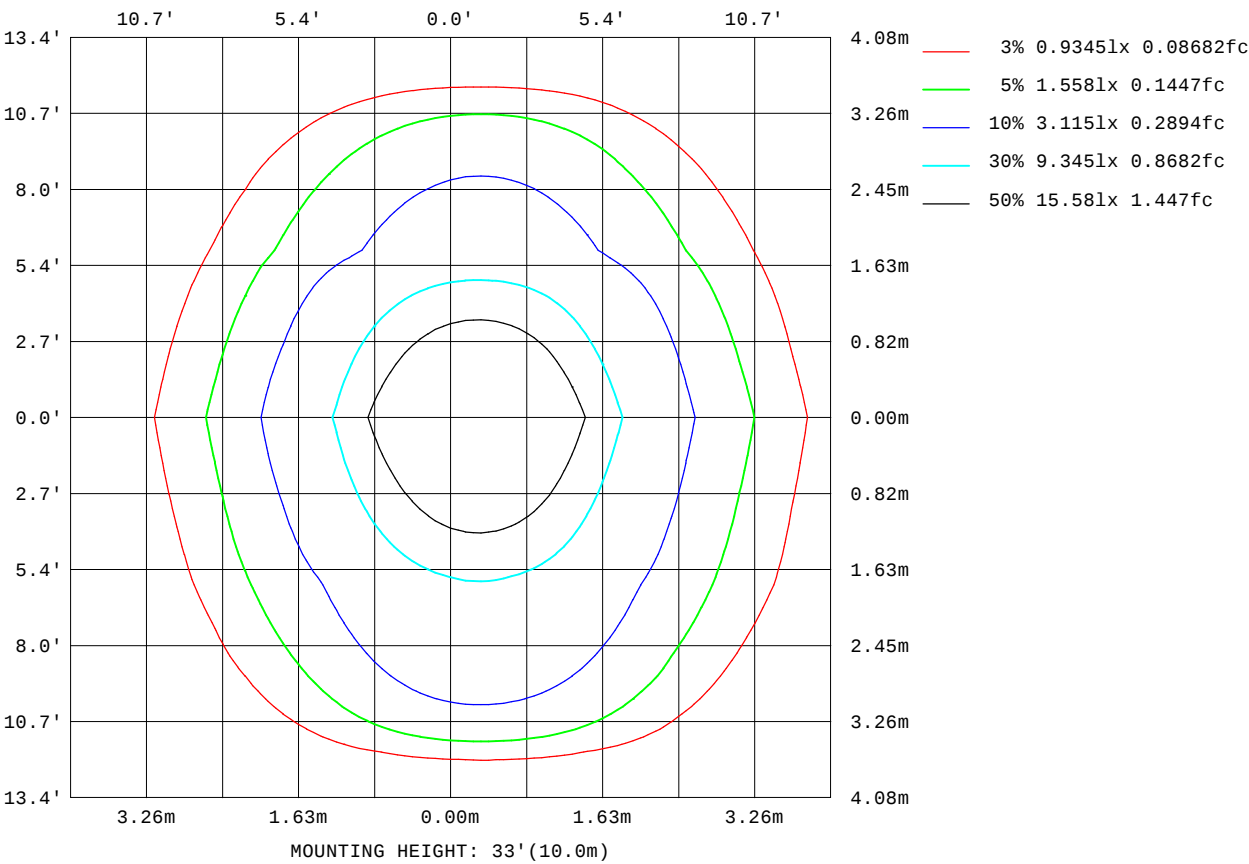

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-30

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

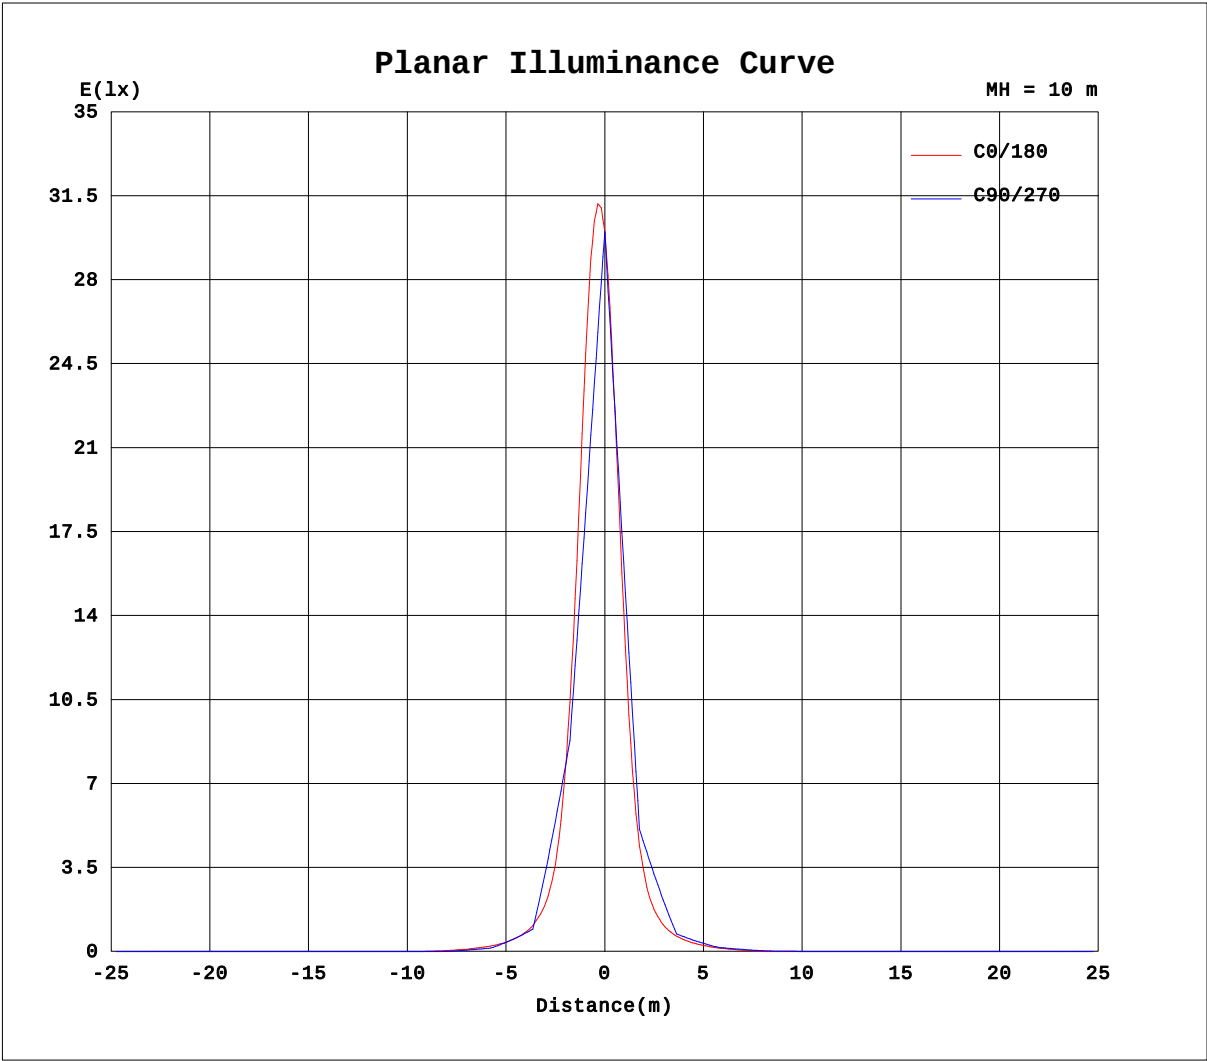


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-30

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.0V I:0.0976A P:7.010W PF:0.5935 Freq:50.01Hz Lamp Flux:266.847x1 lm		
NAME: 8.03.035.0004 10° SP-PZT-R135-6P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070077
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

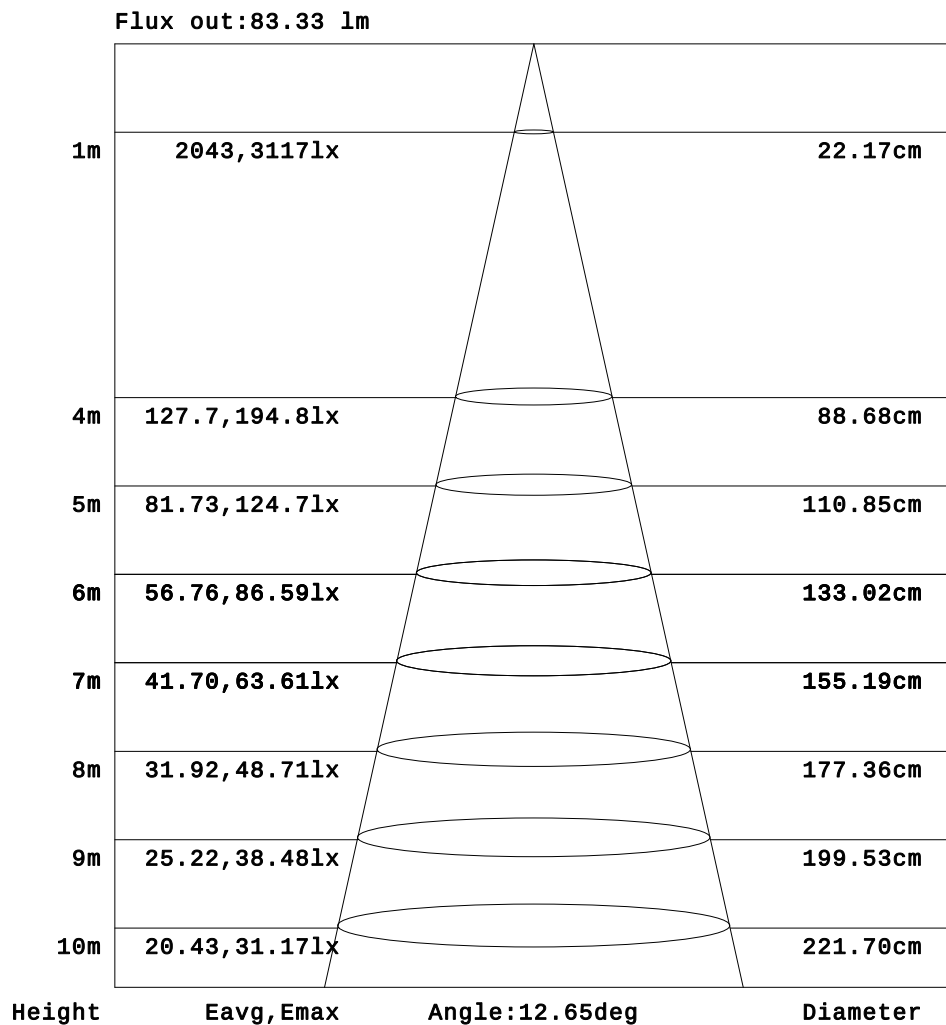

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-30

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.0V I:0.0976A P:7.010W PF:0.5935 Freq:50.01Hz Lamp Flux:266.847x1 lm		
NAME: 8.03.035.0004 10° SP-PZT-R135-6P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070077
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: cd			
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.35	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.70	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.24	4.12	6.90	9.43	11.1	12.1	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.48	8.25	13.8	18.9	22.1	23.5	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.21	3.79	9.57	19.1	31.2	44.8	59.1	68.5	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.42	7.59	16.7	30.0	48.6	70.8	96.1	113	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.83	13.3	25.9	45.6	80.5	153	311	517	
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.24	18.9	35.1	61.3	112	234	527	921	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.17	8.52	21.6	39.3	69.8	138	348	1062	1961	
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.35	11.8	24.3	43.6	78.4	163	462	1598	3001	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.82	10.8	22.4	39.5	68.8	132	323	974	1767	
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.30	9.82	20.5	35.4	59.1	100	185	349	534	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.65	7.32	16.2	28.1	45.4	72.9	124	214	312	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.82	11.9	20.8	31.7	45.8	62.6	79.2	89.4	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.41	7.39	14.2	22.1	31.6	42.3	52.5	58.5	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.90	7.53	12.4	17.4	22.0	25.8	27.7	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.45	3.77	6.51	10.1	13.3	15.7	17.1	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.59	2.77	4.49	5.69	6.38	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.29	1.39	2.25	2.85	3.19	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-30

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.0V I:0.0976A P:7.010W PF:0.5935 Freq:50.01Hz Lamp Flux:266.847x1 lm		
NAME: 8.03.035.0004 10° SP-PZT-R135-6P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070077
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.49	0.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	0.98	0.35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	12.5	11.6	9.48	6.87	3.98	0.45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	24.1	22.8	19.0	13.7	7.96	0.89	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	67.8	57.3	43.3	29.7	17.9	8.26	2.75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	111	91.9	67.6	45.7	27.8	15.6	5.49	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	476	265	132	73.3	41.9	23.3	10.4	2.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	841	438	197	101	56.0	31.1	15.4	4.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	1759	763	258	116	61.7	33.8	17.4	5.67	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	2678	1089	320	132	67.5	36.5	19.4	7.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	1589	692	239	110	59.5	33.4	18.0	6.94	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	500	296	159	88.7	51.6	30.2	16.6	6.58	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	294	185	108	64.9	39.8	23.8	13.0	4.49	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	87.7	75.1	57.8	41.1	28.0	17.5	9.36	2.40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	57.7	50.2	39.6	28.8	19.6	11.9	5.56	1.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	27.6	25.3	21.4	16.5	11.3	6.32	1.77	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	17.0	15.5	12.8	9.40	5.72	3.16	0.89	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	6.46	5.65	4.26	2.31	0.11	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	3.23	2.83	2.13	1.15	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-30

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: