

LED Test Report

Product Mark

Product Type :SP-PZT-R135-6P-RDM

Manufacturer :TPK

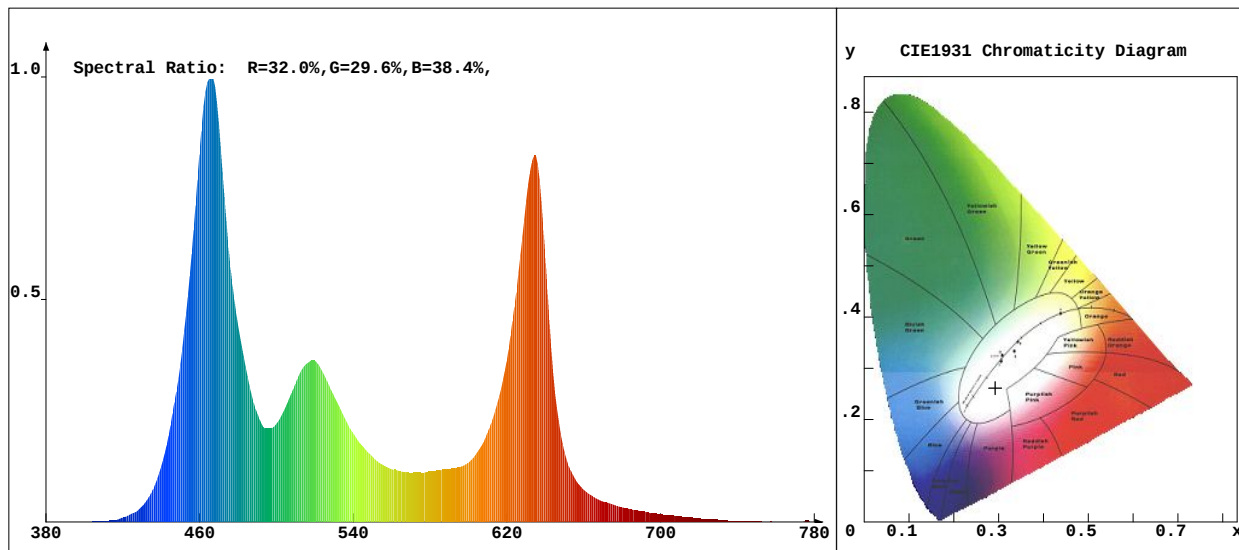
Temperature :22.5'C

Humidity :42%

Operator :qc1

Test Date :2025-07-31 16:04:41

Remark:8.03.035.0004 10° SP-PZT-R135-6P-RDM

**Chroma Parameters**

Chro.Coord.:x=0.2927 y=0.2616 u=0.2108 v=0.2826 duv=-0.0231

CCT:10270K Dominant Wave.:451.5nm Purity:22.8%

Flux RGB Ratio:R=25.5%,G=64.8%,B=9.7% Peak Wave:466.7nm Half Width:24.5nm

Rendering Index:Ra= 35.4

R1 =12 R2 =41 R3 =77 R4 =33 R5 =29 R6 =39 R7 =62 R8 =-10

R9 =-214 R10=-26 R11=22 R12=31 R13=15 R14=84 R15=-6

Photo Parameters

Flux:1103.24lm

Effi.:38.0lm/W

Radiant:4762.9mW

Iv:0.0mcd

Efficiency:0.348

Effi Level:B (EU 874-2012)

Ele. Parameters

Voltage:U=120.000V

Current:I=0.3920A

Power:P=29.01W

Power Factor:PF=0.616

Instrument state

Instrument:Hopoo HP8000S

Integral Time: 39.097ms

VPeak: 13945

VDark: 1098

Scan Range: 380-780nm

Product ID: 201605038