

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		10082.7 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	31.8V x 27.5H
	At 50% of Imax	10.7V x 13.3H
	At 90% of Imax	3.6V x 5.3H
Beam Flux	Total	988.0 lumens per klm.
	To 10% of Imax	629.2 lumens per klm.
	To 50% of Imax	262.3 lumens per klm.
	To 90% of Imax	26.2 lumens per klm.
Upward LOR		0.0 %
Downward LOR		98.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:277.8V I:0.1824A P:29.28W PF:0.5777 Freq:49.99Hz Lamp Flux:1535.51x1 lm		
NAME: 8.03.035.0004 10° SP-PZT-R135-6P-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070083
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

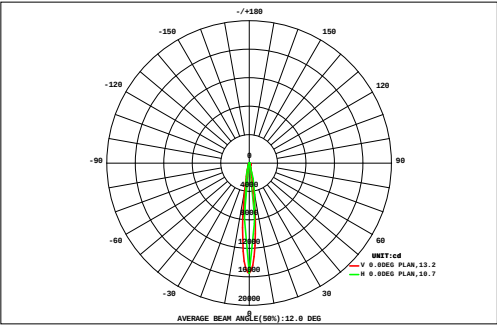

DATA OF LAMP		Eff:52.43lm/W	
MODEL SP-PZT-R135-6P-RDM	Imax(cd)	15482	
NOMINAL POWER(W)	29	AVAILABILITY(%)	67.4
RATED VOLTAGE(V)	277	Avai. FLUX(lm)	1034
NOMINAL FLUX(lm)	1535.51	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1536
TEST VOLTAGE(V)	277	θ @50%(H,V)	13,11DEG


AREA FLUX DIAGRAM																	UNIT:lm			Φ t	Φ a
VERTICAL (DEG)	27	0.39	0.45	0.52	0.59	0.66	0.72	0.79	0.84	0.88	0.89	0.88	0.84	0.79	0.72	0.64	0.57	0.49	0.42	12.1	0.00
	24	0.38	0.46	0.54	0.64	0.76	0.88	1.01	1.14	1.24	1.30	1.31	1.27	1.18	1.06	0.93	0.80	0.69	0.58	16.2	0.00
	21	0.49	0.59	0.70	0.84	0.99	1.16	1.32	1.45	1.55	1.58	1.53	1.43	1.29	1.12	0.96	0.81	0.68	0.57	19.1	0.00
	18	0.61	0.73	0.88	1.05	1.25	1.45	1.64	1.78	1.86	1.85	1.75	1.58	1.38	1.17	0.97	0.81	0.67	0.55	22.0	0.00
	15	0.51	0.64	0.80	1.01	1.31	1.75	2.40	3.33	4.48	5.42	5.56	4.80	3.68	2.70	1.99	1.48	1.13	0.88	43.9	19.0
	12	0.59	0.75	0.97	1.26	1.71	2.40	3.44	4.85	6.37	7.29	7.01	5.74	4.26	3.05	2.20	1.61	1.21	0.93	55.6	33.3
	9	0.83	1.07	1.41	1.89	2.65	3.84	5.59	7.73	9.39	9.32	7.55	5.36	3.67	2.54	1.79	1.31	0.99	0.74	67.7	46.4
		0.71	0.92	1.20	1.63	2.33	3.57	6.06	10.7	17.0	21.8	21.5	16.5	10.1	5.50	3.17	2.03	1.40	1.01	127	109
		0.56	0.72	0.95	1.28	1.89	3.16	6.43	13.7	25.3	35.5	37.1	29.0	17.2	8.83	4.71	2.83	1.87	1.32	192	177
		0.91	1.23	1.73	2.66	4.61	9.50	19.9	35.5	47.4	46.7	33.9	18.2	8.32	4.16	2.47	1.64	1.16	0.85	241	225
		0.88	1.19	1.66	2.54	4.37	8.90	18.6	33.2	45.0	45.1	33.7	18.9	8.99	4.53	2.65	1.73	1.21	0.88	234	218
	-9	0.51	0.64	0.80	0.96	1.10	0.98	1.14	2.72	8.92	18.6	24.2	21.8	14.2	7.63	4.19	2.57	1.72	1.22	114	99.7
	-12	0.63	0.81	1.05	1.37	1.82	2.62	4.06	5.80	7.31	10.4	11.7	10.2	6.99	4.22	2.62	1.75	1.25	0.91	75.5	57.8
	-15	0.79	1.03	1.37	1.90	2.78	4.21	6.14	7.56	6.39	2.61	0.45	0.00	0.09	0.42	0.77	0.79	0.69	0.55	38.5	23.6
-18	0.41	0.51	0.63	0.79	0.97	1.19	1.52	2.19	3.51	5.18	6.08	5.42	4.05	2.80	1.98	1.45	1.08	0.82	40.6	18.5	
-21	0.35	0.42	0.50	0.58	0.60	0.55	0.49	0.50	0.82	2.10	3.49	3.65	2.98	2.17	1.60	1.21	0.92	0.71	23.7	6.91	
-24	0.45	0.56	0.70	0.83	0.95	1.00	0.93	0.60	0.25	0.10	0.05	0.10	0.19	0.33	0.45	0.45	0.39	0.33	8.65	0.00	
-27	0.32	0.40	0.49	0.58	0.67	0.71	0.68	0.59	0.65	0.70	0.71	0.70	0.65	0.59	0.53	0.51	0.44	0.37	10.3	0.00	
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)				6	9	12	15	18	21	24	27	
Φ t	10.4	13.1	16.9	22.4	31.4	48.6	82.2	134	188	216	199	145	89.9	53.5	34.6	24.4	18.0	13.7	1342	---	
Φ a	0.00	0.00	0.00	0.00	6.66	23.1	67.5	119	176	206	191	138	69.2	28.8	9.12	0.00	0.00	0.00	---	1034	

one-half-peak spread: U:5.7,D:5.1 , L:6.4,R:6.4,EMA Beam Type: Type 2 x 3 (H x V)

V(β) Range:-90 - 90DEG	V(B) Range:-80 - 80DEG
H(β) Interval: 1.0DEG	V(B) Interval: 5.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Temperature:28.0DEG	Humidity:83%
Operators:QC1	Test Distance:8.300m [K=1.0000]
Test Date:2025-07-31	Remarks:

ISOCANDELA DIAGRAM

Test:U:277.8V I:0.1824A P:29.28W PF:0.5777 Freq:49.99Hz Lamp Flux:1535.51x1 lm		
NAME: 8.03.035.0004 10° SP-PZT-R135-6P-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070083
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

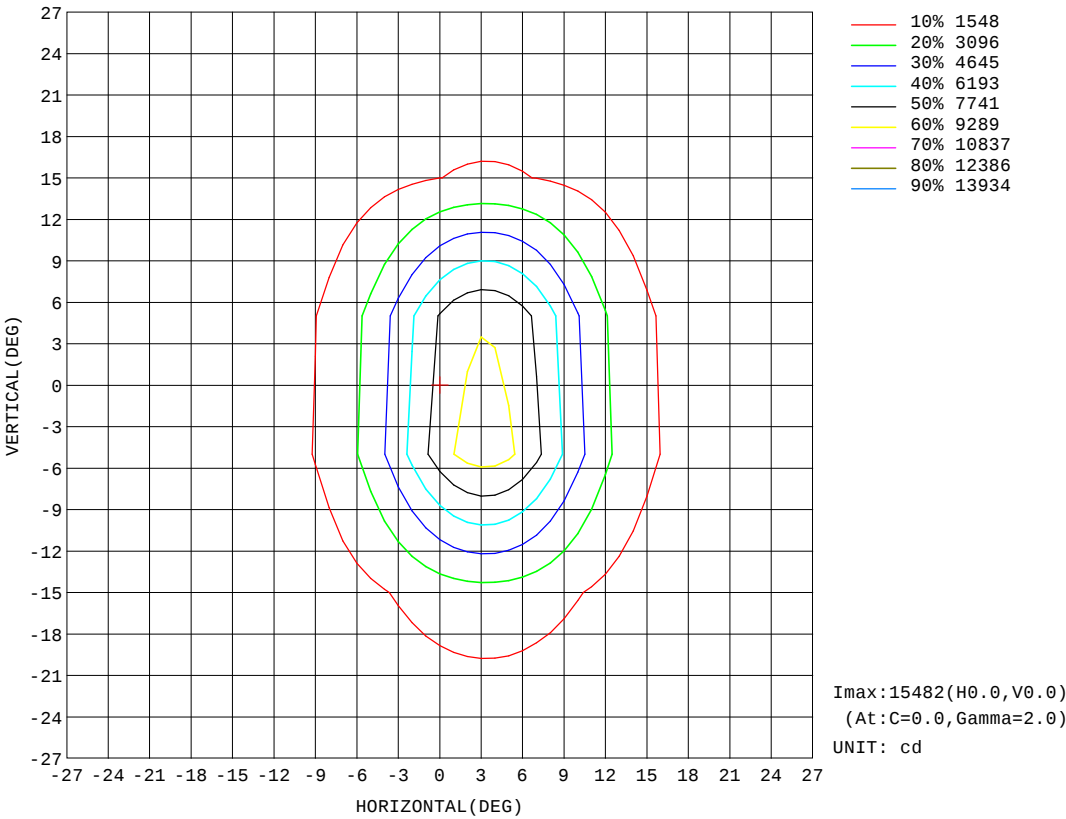


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:277.8V I:0.1824A P:29.28W PF:0.5777 Freq:49.99Hz Lamp Flux:1535.51x1 lm		
NAME: 8.03.035.0004 10° SP-PZT-R135-6P-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070083
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

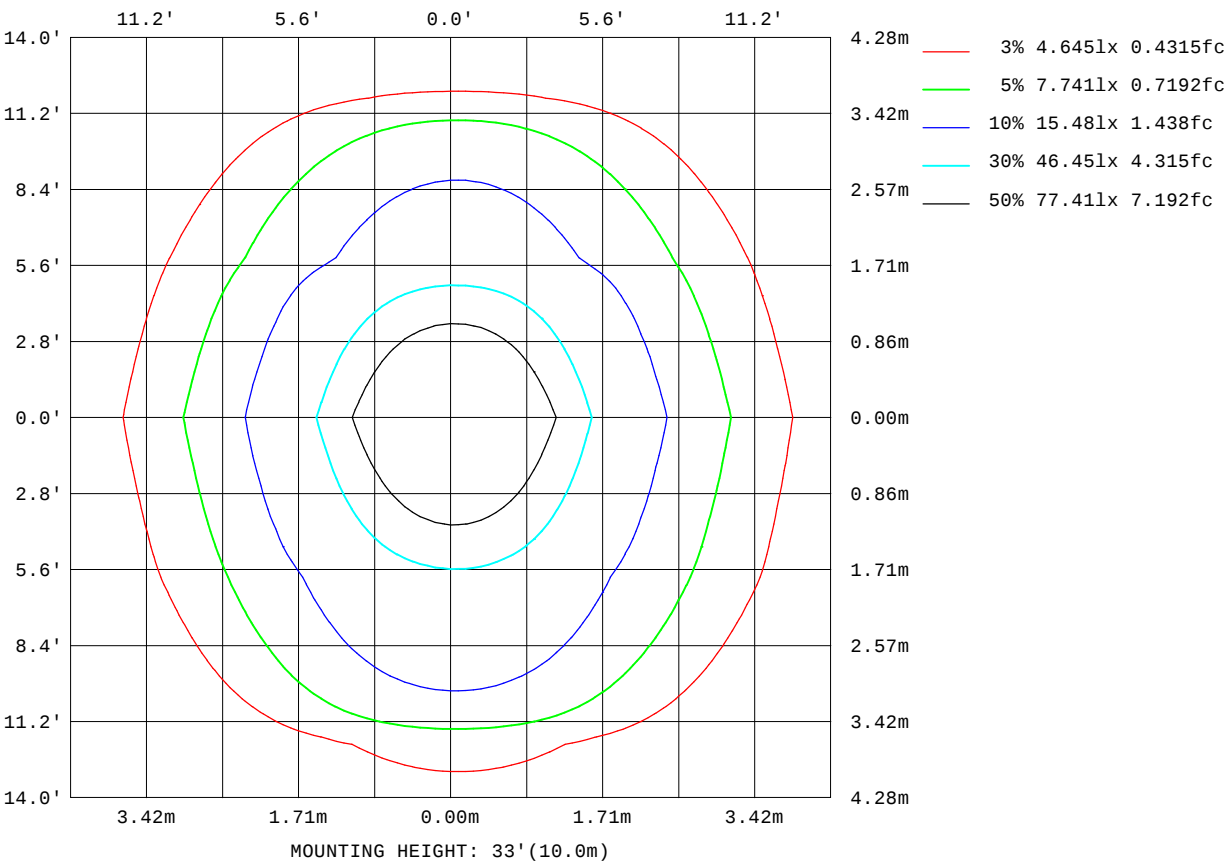

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

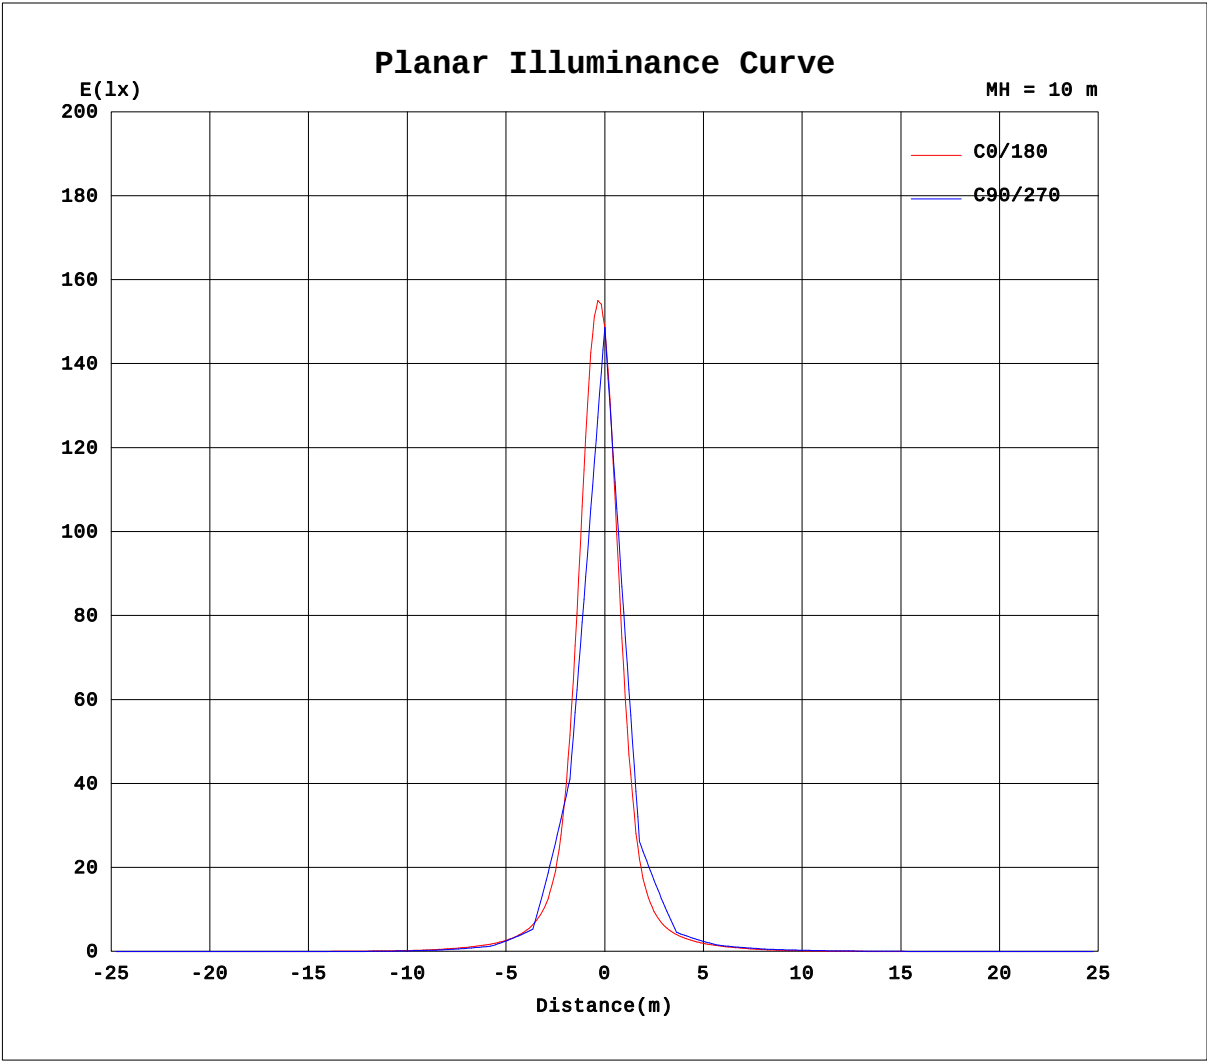


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:277.8V I:0.1824A P:29.28W PF:0.5777 Freq:49.99Hz Lamp Flux:1535.51x1 lm		
NAME: 8.03.035.0004 10° SP-PZT-R135-6P-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070083
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

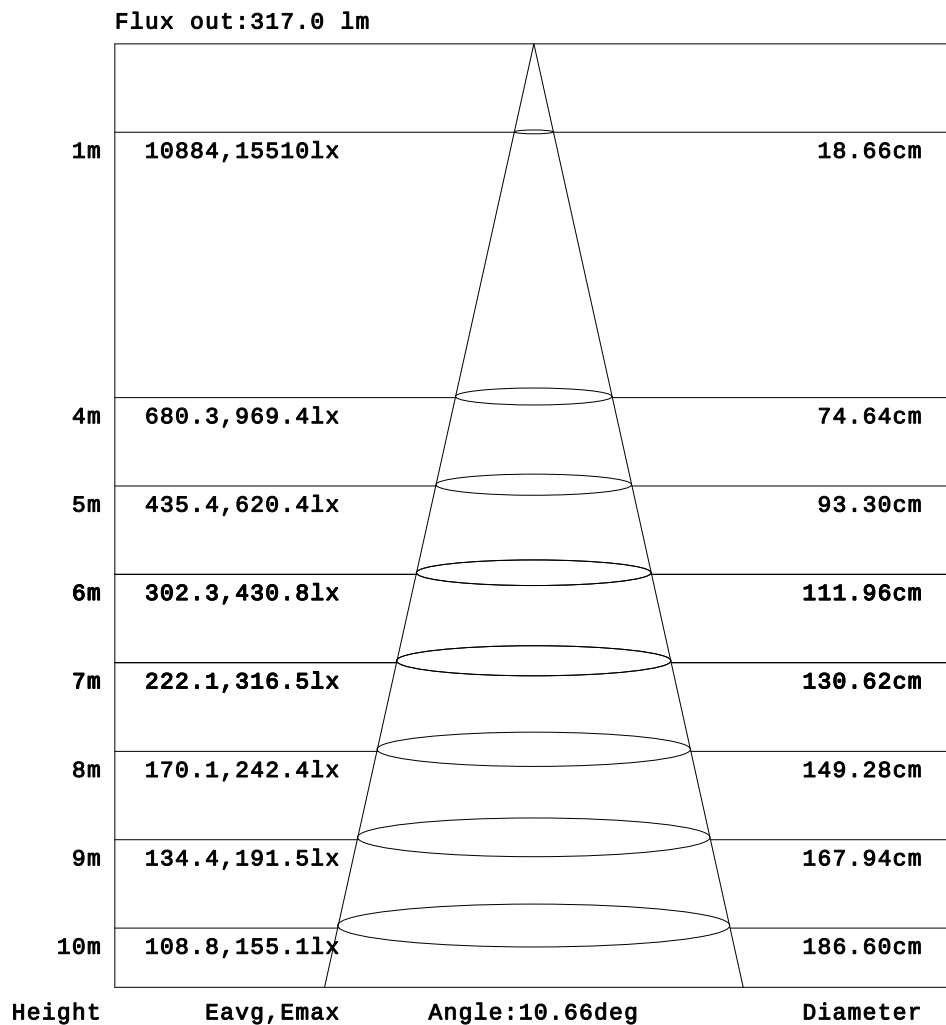

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.8V I:0.1824A P:29.28W PF:0.5777 Freq:49.99Hz Lamp Flux:1535.51x1 lm		
NAME: 8.03.035.0004 10° SP-PZT-R135-6P-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070083
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1

UNIT: ×10cd

H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	0.31	0.51	0.72	0.93	1.12	1.29	1.41	1.45
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.47	0.86	1.27	1.69	2.10	2.46	2.75	2.89	2.90
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.40	0.84	1.42	2.02	2.66	3.35	4.13	4.98	5.53	5.84
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.55	1.19	1.91	2.69	3.52	4.44	5.49	6.91	7.93	8.61	8.92
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	0.64	1.42	2.31	3.39	4.73	6.37	8.41	10.4	12.4	13.8	14.5
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.77	1.65	2.67	3.94	5.63	7.81	10.8	13.6	16.4	18.7	20.0	20.5
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.01	0.61	1.68	2.99	4.44	6.30	8.91	12.4	16.9	22.7	29.3	36.2	41.8
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.56	1.68	3.27	4.97	7.04	9.82	14.2	19.2	27.0	36.9	48.2	59.8	65.7
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.17	1.38	2.78	4.48	6.49	9.26	14.0	20.2	28.7	43.2	70.5	130	226
-10	0.00	0.00	0.00	0.00	0.00	0.00	1.11	2.69	4.30	6.28	8.98	13.8	21.1	30.3	45.9	77.4	153	315	449
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.50	1.98	3.52	5.31	7.72	11.8	18.0	26.1	39.1	64.6	134	376	853
0	0.00	0.00	0.00	0.00	0.00	0.11	1.59	3.10	4.78	7.02	10.9	16.7	23.9	35.8	57.5	116	339	999	1548
5	0.00	0.00	0.00	0.00	0.00	0.00	0.69	2.14	3.67	5.52	8.30	12.9	18.5	26.2	39.0	63.1	127	349	785
10	0.00	0.00	0.00	0.00	0.00	0.14	1.53	2.99	4.65	7.05	10.7	15.5	21.6	30.4	44.5	70.0	122	213	285
15	0.00	0.00	0.00	0.00	0.00	0.00	0.58	1.93	3.40	5.21	7.85	11.5	15.8	21.4	29.3	41.5	62.7	101	153
20	0.00	0.00	0.00	0.00	0.00	0.06	1.22	2.60	4.15	6.38	9.01	12.5	16.3	21.2	27.3	35.4	44.4	52.4	56.1
25	0.00	0.00	0.00	0.00	0.00	0.00	0.25	1.42	2.77	4.43	6.45	8.97	11.9	15.2	19.1	23.8	29.4	34.9	39.0
30	0.00	0.00	0.00	0.00	0.00	0.00	0.60	1.83	3.18	4.94	6.67	8.96	11.2	13.7	16.3	18.9	21.2	22.9	23.7
35	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.68	1.83	3.22	4.73	6.32	8.22	10.0	11.9	13.8	15.6	17.0	17.9
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.88	2.00	3.38	4.59	5.97	7.38	8.62	9.81	10.9	11.7	12.3	12.6
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	0.70	1.75	2.93	3.98	5.14	6.26	7.24	8.11	8.83	9.35	9.67
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.57	1.59	2.52	3.36	4.29	5.11	5.72	6.22	6.60	6.83	6.94
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	0.47	1.04	1.80	2.51	3.24	3.87	4.35	4.72	4.98	5.12
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.51	1.09	1.62	2.16	2.63	2.95	3.17	3.32	3.39
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.38	0.65	0.91	1.19	1.39	1.62	1.78	1.88
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	0.27	0.38	0.43
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.16	0.20
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.8V I:0.1824A P:29.28W PF:0.5777 Freq:49.99Hz Lamp Flux:1535.51x1 lm		
NAME: 8.03.035.0004 10° SP-PZT-R135-6P-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070083
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2

UNIT: ×10cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	1.47	1.47	1.41	1.28	1.11	0.91	0.70	0.49	0.28	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	2.97	2.88	2.67	2.37	1.99	1.57	1.14	0.73	0.32	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	5.93	5.78	5.37	4.62	3.82	3.14	2.47	1.84	1.23	0.63	0.25	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	8.78	8.24	7.29	5.85	4.83	3.90	3.04	2.22	1.44	0.75	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	14.8	14.5	13.4	11.5	9.42	7.31	5.53	4.07	2.84	1.84	1.00	0.30	0.00	0.00	0.00	0.00	0.00	0.00
-30	20.6	19.6	17.4	14.6	11.6	8.45	6.23	4.40	2.99	1.90	0.96	0.07	0.00	0.00	0.00	0.00	0.00	0.00
-25	42.9	39.2	32.6	25.8	19.3	14.1	10.1	7.18	5.10	3.49	2.13	0.95	0.10	0.00	0.00	0.00	0.00	0.00
-20	61.8	51.2	39.6	29.2	20.5	14.8	10.2	7.34	5.18	3.44	1.79	0.63	0.00	0.00	0.00	0.00	0.00	0.00
-15	250	162	88.5	53.2	34.2	23.0	15.8	10.4	7.29	5.07	3.28	1.76	0.42	0.00	0.00	0.00	0.00	0.00
-10	342	173	89.2	52.1	33.0	22.0	14.3	9.40	6.59	4.51	2.84	1.22	0.02	0.00	0.00	0.00	0.00	0.00
-5	957	510	184	83.4	47.3	29.8	20.1	13.1	8.59	5.93	3.99	2.38	0.81	0.00	0.00	0.00	0.00	0.00
0	1082	380	131	64.5	38.2	24.9	17.1	10.8	7.15	4.90	3.17	1.61	0.10	0.00	0.00	0.00	0.00	0.00
5	878	472	173	80.0	46.2	29.6	20.4	14.1	9.17	6.15	4.16	2.53	1.02	0.00	0.00	0.00	0.00	0.00
10	231	137	78.7	48.6	32.0	22.2	15.9	10.9	7.24	4.87	3.16	1.62	0.18	0.00	0.00	0.00	0.00	0.00
15	167	121	75.7	48.8	33.4	23.7	17.3	12.6	8.66	5.81	3.89	2.31	0.89	0.00	0.00	0.00	0.00	0.00
20	53.5	45.9	36.8	28.6	22.1	16.9	12.8	9.15	6.49	4.28	2.69	1.26	0.07	0.00	0.00	0.00	0.00	0.00
25	39.7	36.8	31.6	25.9	20.9	16.6	13.0	9.82	7.13	4.97	3.21	1.78	0.51	0.00	0.00	0.00	0.00	0.00
30	23.3	21.8	19.6	17.0	14.3	11.8	9.38	7.01	5.21	3.39	1.99	0.72	0.00	0.00	0.00	0.00	0.00	0.00
35	18.1	17.6	16.3	14.7	12.8	10.9	8.97	6.98	5.30	3.69	2.23	1.01	0.15	0.00	0.00	0.00	0.00	0.00
40	12.5	12.0	11.2	10.2	8.98	7.68	6.18	4.84	3.54	2.12	0.98	0.05	0.00	0.00	0.00	0.00	0.00	0.00
45	9.75	9.59	9.20	8.56	7.73	6.76	5.62	4.45	3.37	2.12	1.04	0.28	0.00	0.00	0.00	0.00	0.00	0.00
50	6.92	6.78	6.47	5.99	5.36	4.50	3.63	2.77	1.74	0.76	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	5.17	5.12	4.95	4.64	4.17	3.56	2.87	2.17	1.39	0.65	0.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	3.38	3.29	3.09	2.76	2.27	1.80	1.28	0.68	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	1.91	1.88	1.76	1.55	1.29	1.04	0.80	0.53	0.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.41	0.35	0.20	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.21	0.20	0.15	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: