

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		11747.6 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	32.9V x 26.8H
	At 50% of Imax	12.6V x 13.5H
	At 90% of Imax	4.4V x 5.5H
Beam Flux	Total	991.9 lumens per klm.
	To 10% of Imax	727.0 lumens per klm.
	To 50% of Imax	318.2 lumens per klm.
	To 90% of Imax	31.9 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.2 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:277.7V I:0.0613A P:7.510W PF:0.4409 Freq:50.00Hz Lamp Flux:264.974x1 lm		
NAME: 8.03.035.0004 10° SP-PZT-R135-6P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070084
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

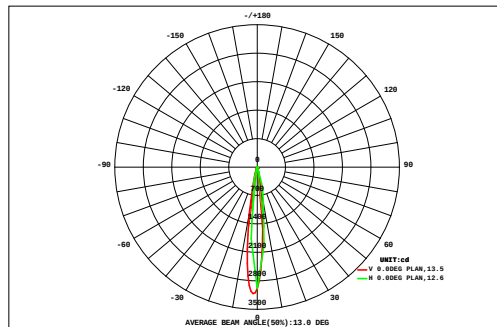

DATA OF LAMP		Eff:35.28lm/W	
MODE:SP-PZT-R135-6P-RDM-R		Imax(cd)	3113
NOMINAL POWER(W)	7	AVAILABILITY(%)	75.1
RATED VOLTAGE(V)	277	Avai. FLUX(lm)	198.9
NOMINAL FLUX(lm)	264.974	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	265.0
TEST VOLTAGE(V)	277	θ @50%(H,V)	13,13DEG

		AREA FLUX DIAGRAM															UNIT:lm				Φ t	Φ a
		0.03	0.04	0.05	0.06	0.08	0.09	0.10	0.11	0.12	0.12	0.12	0.12	0.11	0.09	0.08	0.07	0.05	0.04	1.48	0.00	
VERTICAL (DEG)	27	0.04	0.06	0.07	0.09	0.11	0.14	0.16	0.18	0.20	0.21	0.20	0.19	0.17	0.14	0.12	0.09	0.07	0.06	2.30	0.00	
	24	0.05	0.07	0.09	0.11	0.14	0.17	0.20	0.23	0.25	0.26	0.25	0.23	0.21	0.17	0.14	0.11	0.09	0.07	2.83	0.00	
	21	0.06	0.08	0.10	0.13	0.16	0.20	0.24	0.27	0.30	0.31	0.30	0.28	0.24	0.21	0.17	0.13	0.10	0.08	3.37	0.00	
	18	0.07	0.10	0.13	0.18	0.25	0.36	0.52	0.74	0.97	1.09	1.02	0.80	0.56	0.39	0.28	0.20	0.14	0.10	7.90	3.30	
	15	0.08	0.11	0.16	0.22	0.30	0.45	0.67	0.98	1.31	1.48	1.37	1.07	0.73	0.50	0.34	0.24	0.17	0.12	10.3	6.21	
	12	0.09	0.13	0.18	0.25	0.36	0.54	0.82	1.22	1.64	1.87	1.73	1.33	0.90	0.60	0.40	0.28	0.19	0.13	12.7	8.74	
	9	0.09	0.13	0.19	0.28	0.43	0.76	1.44	2.64	3.92	4.53	4.11	2.82	1.59	0.85	0.49	0.32	0.21	0.14	25.0	21.7	
	-9	0.10	0.14	0.20	0.31	0.51	1.00	2.13	4.20	6.45	7.49	6.73	4.46	2.35	1.11	0.58	0.35	0.23	0.15	38.5	35.6	
	-12	0.10	0.15	0.22	0.35	0.59	1.18	2.63	5.33	8.24	9.58	8.60	5.64	2.91	1.32	0.67	0.39	0.24	0.16	48.3	45.5	
	-15	0.10	0.15	0.22	0.34	0.58	1.16	2.56	5.17	8.00	9.30	8.35	5.48	2.84	1.30	0.66	0.39	0.24	0.16	47.0	44.1	
-18	0.09	0.12	0.18	0.26	0.41	0.70	1.29	2.32	3.49	4.06	3.66	2.53	1.46	0.79	0.47	0.30	0.20	0.14	22.4	19.3		
-21	0.08	0.11	0.16	0.23	0.35	0.54	0.85	1.35	1.94	2.26	2.05	1.52	0.99	0.62	0.40	0.27	0.19	0.13	14.1	10.3		
-24	0.07	0.10	0.15	0.21	0.29	0.39	0.41	0.37	0.44	0.51	0.48	0.52	0.52	0.45	0.34	0.24	0.17	0.12	5.80	1.09		
-27	0.05	0.08	0.11	0.16	0.22	0.32	0.47	0.70	0.96	1.10	1.01	0.77	0.53	0.35	0.25	0.18	0.12	0.09	7.45	2.96		
	0.04	0.06	0.08	0.12	0.15	0.20	0.26	0.32	0.39	0.42	0.40	0.34	0.28	0.22	0.17	0.13	0.09	0.07	3.75	0.00		
	0.03	0.04	0.06	0.08	0.09	0.08	0.05	0.03	0.00	0.00	0.00	0.02	0.05	0.08	0.09	0.08	0.07	0.05	0.90	0.00		
	0.02	0.03	0.04	0.06	0.07	0.07	0.08	0.09	0.10	0.11	0.11	0.10	0.09	0.08	0.07	0.06	0.05	0.04	1.27	0.00		
		-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)				6	9	12	15	18	21	24	27	
Φ t		1.19	1.69	2.39	3.44	5.10	8.36	14.9	26.2	38.7	44.7	40.5	28.2	16.5	9.27	5.73	3.83	2.64	1.84	255	---	
Φ a		0.00	0.00	0.00	0.00	0.00	3.43	10.7	23.3	36.8	43.1	38.6	25.7	12.6	4.43	0.29	0.00	0.00	0.00	---	199	


one-half-peak spread: U:6.8,D:5.9 , L:7.1,R:6.1,EMA Beam Type: Type 2 x 3 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:277.7V I:0.0613A P:7.510W PF:0.4409 Freq:50.00Hz Lamp Flux:264.974x1 lm		
NAME: 8.03.035.0004 10° SP-PZT-R135-6P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070084
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

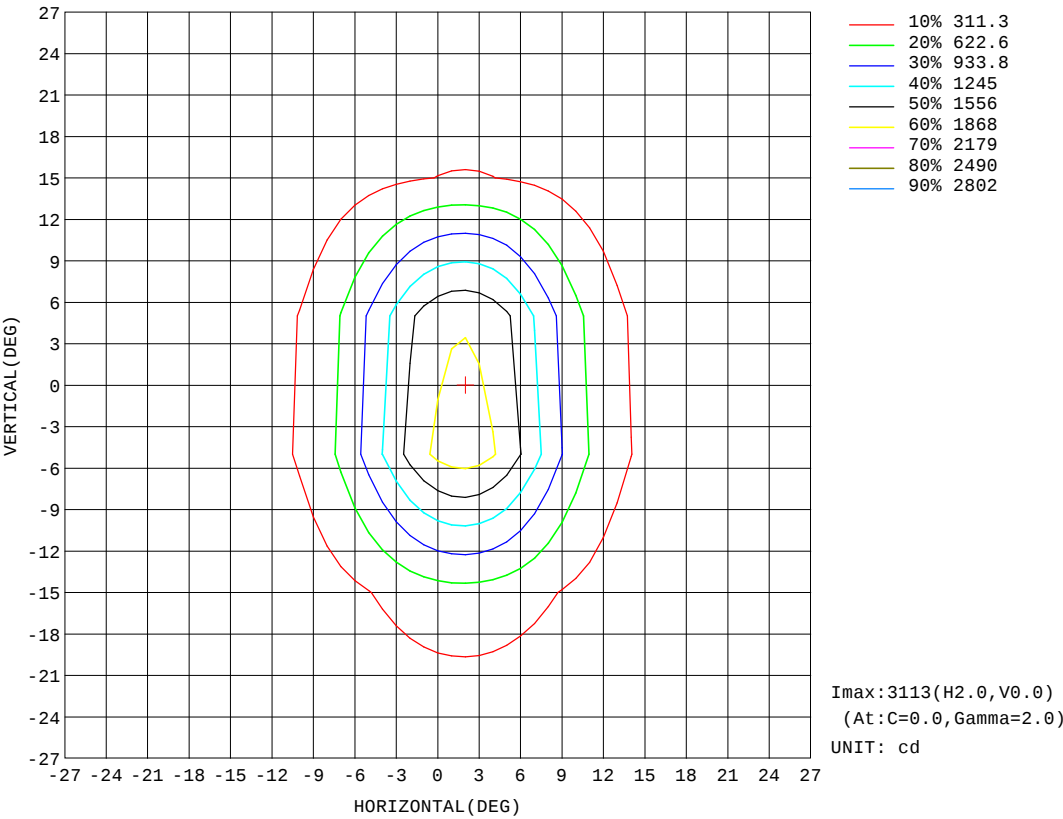


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:277.7V I:0.0613A P:7.510W PF:0.4409 Freq:50.00Hz Lamp Flux:264.974x1 lm		
NAME: 8.03.035.0004 10° SP-PZT-R135-6P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070084
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

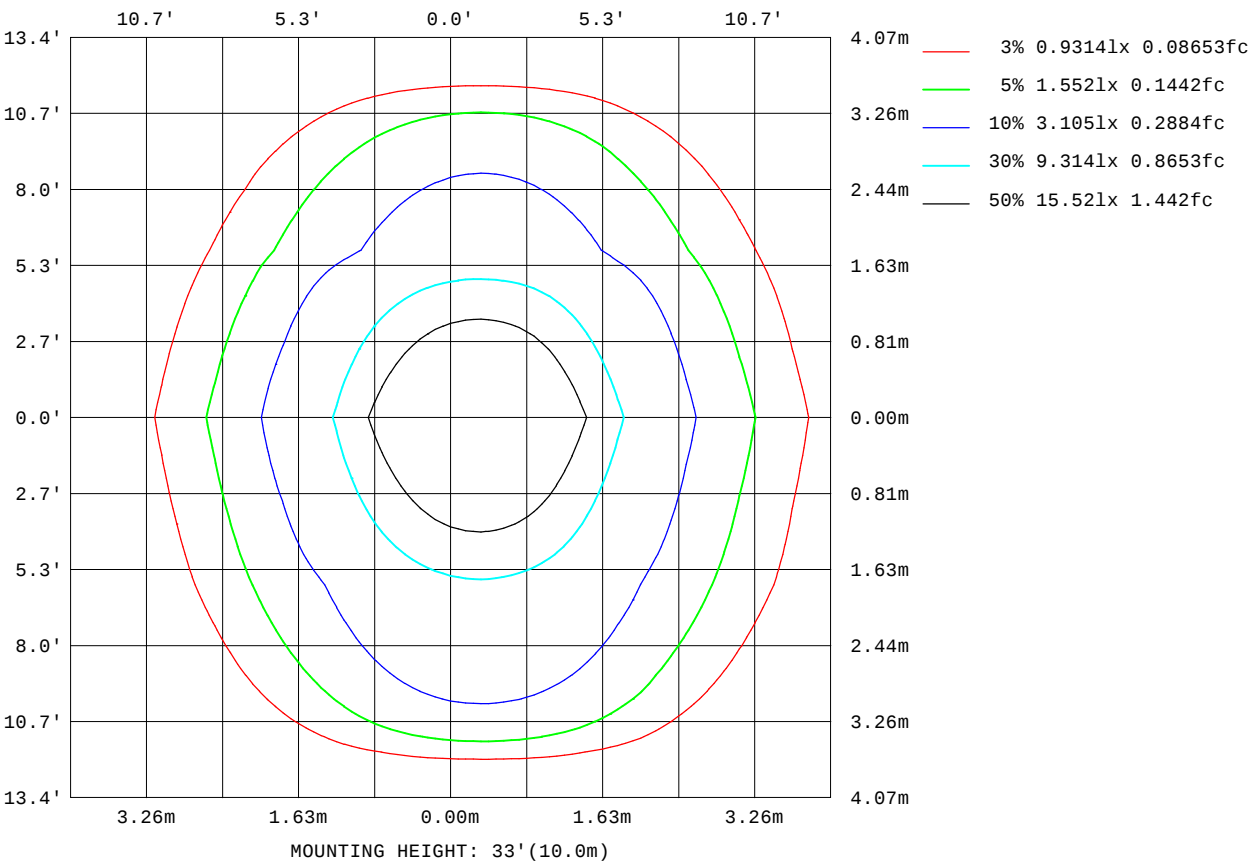

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

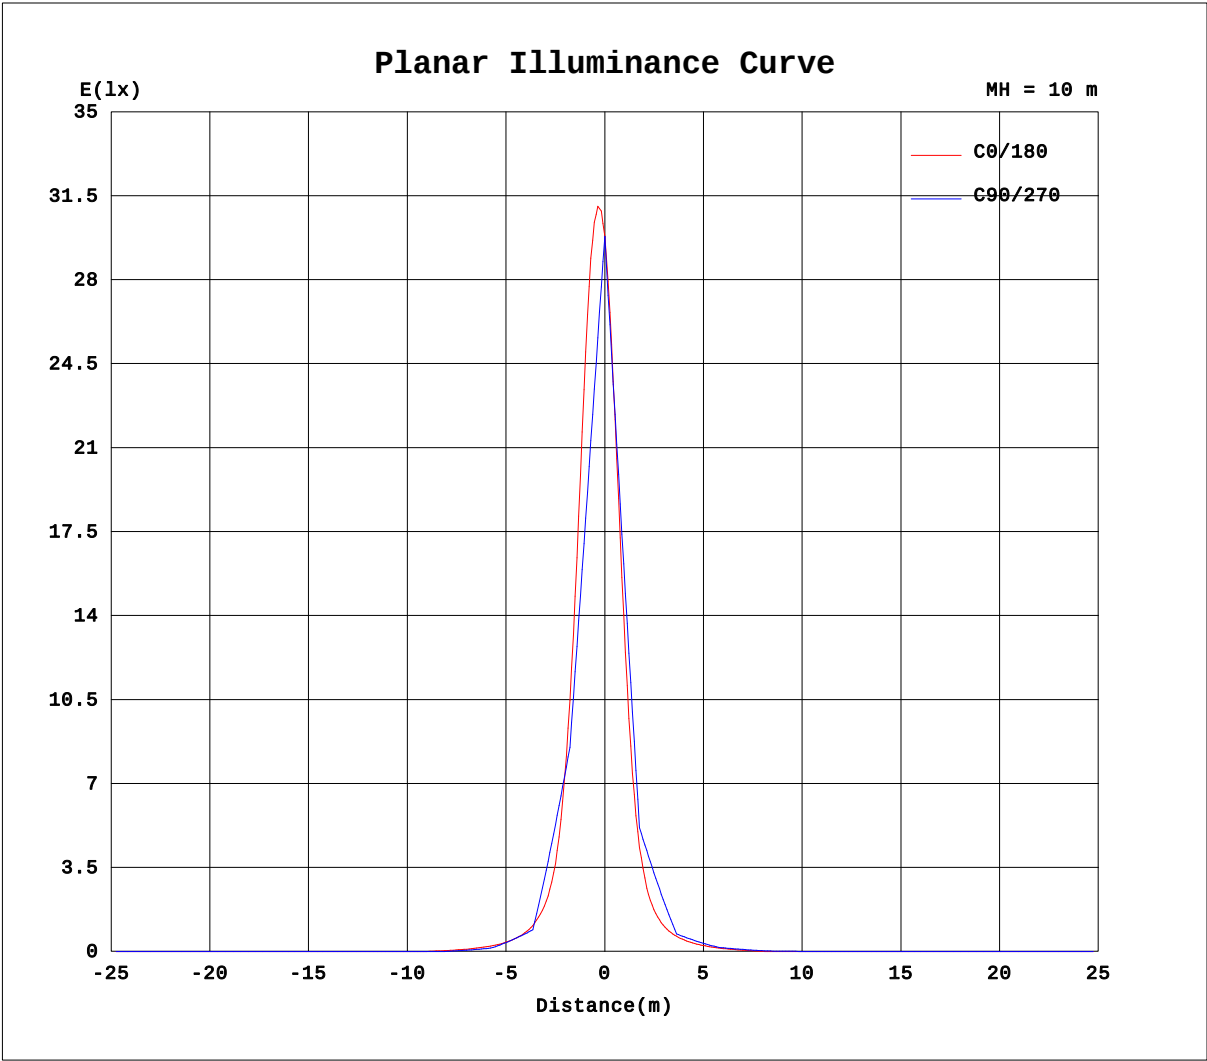


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:277.7V I:0.0613A P:7.510W PF:0.4409 Freq:50.00Hz Lamp Flux:264.974x1 lm		
NAME: 8.03.035.0004 10° SP-PZT-R135-6P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070084
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

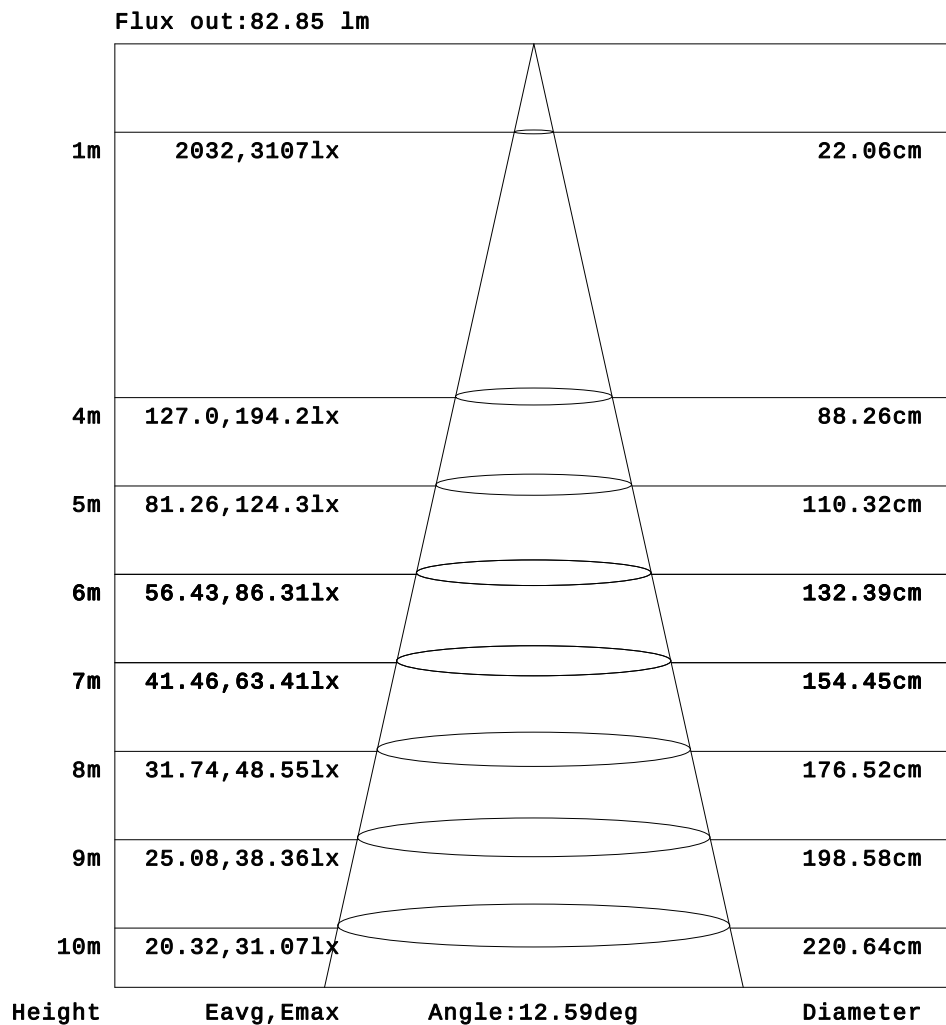

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.7V I:0.0613A P:7.510W PF:0.4409 Freq:50.00Hz Lamp Flux:264.974x1 lm		
NAME: 8.03.035.0004 10° SP-PZT-R135-6P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070084
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: cd			
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.23	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.47	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.05	3.91	6.65	9.10	10.7	11.6	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.09	7.81	13.3	18.2	21.4	22.8	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	3.63	9.15	18.5	30.5	43.8	57.6	66.9	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.20	7.26	16.2	29.3	47.6	69.3	93.9	111	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.59	12.9	25.4	44.8	78.9	149	303	502	
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.97	18.5	34.6	60.3	110	229	511	893	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	8.24	21.1	38.7	68.8	135	342	1045	1937	
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	11.5	23.8	42.9	77.4	161	455	1578	2982	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.60	10.5	21.9	38.9	67.9	130	320	964	1761	
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.12	9.53	20.1	35.0	58.5	99.2	185	351	541	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.56	7.08	15.9	27.7	45.0	72.3	123	215	315	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.63	11.7	20.5	31.4	45.5	62.4	79.1	89.6	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.31	7.22	14.0	21.9	31.4	42.2	52.4	58.7	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.79	7.41	12.3	17.4	22.0	25.8	27.8	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.40	3.70	6.41	10.0	13.2	15.7	17.1	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.51	2.70	4.43	5.64	6.37	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.26	1.35	2.21	2.82	3.19	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.7V I:0.0613A P:7.510W PF:0.4409 Freq:50.00Hz Lamp Flux:264.974x1 lm		
NAME: 8.03.035.0004 10° SP-PZT-R135-6P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070084
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.38	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	0.76	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	12.1	11.2	9.25	6.70	3.84	0.35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	23.4	22.2	18.5	13.4	7.68	0.71	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	66.2	56.1	42.5	29.2	17.5	8.03	2.66	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	109	90.1	66.4	45.1	27.3	15.4	5.32	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	464	260	130	72.5	41.4	23.0	10.3	1.96	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	819	430	194	99.9	55.5	30.7	15.2	3.92	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	1753	764	258	116	61.4	33.5	17.3	5.57	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	2687	1098	322	132	67.2	36.4	19.3	7.22	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	1598	699	241	110	59.5	33.3	18.0	6.91	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	510	300	160	89.1	51.7	30.2	16.6	6.59	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	299	188	109	65.2	39.9	23.9	13.0	4.51	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	88.1	75.4	58.1	41.3	28.0	17.5	9.36	2.43	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	57.9	50.4	39.8	28.9	19.7	11.9	5.58	1.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	27.6	25.4	21.4	16.5	11.4	6.33	1.79	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	17.0	15.5	12.8	9.43	5.75	3.17	0.90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	6.44	5.65	4.27	2.32	0.13	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	3.22	2.82	2.13	1.16	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: