

Floodlight Summary:


Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)		10594.0 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	33.4V x 27.6H
	At 50% of Imax	12.6V x 13.7H
	At 90% of Imax	4.4V x 5.7H
Beam Flux	Total	994.4 lumens per klm.
	To 10% of Imax	676.7 lumens per klm.
	To 50% of Imax	291.8 lumens per klm.
	To 90% of Imax	29.9 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.4 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG	V(B) Range:-80 - 80DEG
H(β) Interval: 1.0DEG	V(B) Interval: 5.0DEG
Test Speed: HIGH	Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Temperature:28.0DEG	Humidity:83%
Operators:QC1	Test Distance:8.300m [K=1.0000]
Test Date:2025-07-31	Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:277.8V I:0.0726A P:9.460W PF:0.4741 Freq:50.00Hz Lamp Flux:537.891x1 lm		
NAME: 8.03.035.0004 10° SP-PZT-R135-6P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070082
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

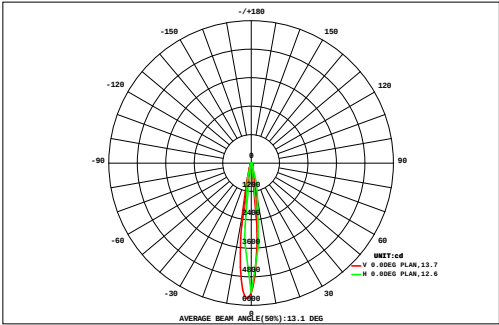

DATA OF LAMP		Eff:56.86lm/W	
MODE:SP-PZT-R135-6P-RDM-W		Imax(cd)	5698
NOMINAL POWER(W)	9	AVAILABILITY(%)	69.7
RATED VOLTAGE(V)	277	Avai. FLUX(lm)	375.1
NOMINAL FLUX(lm)	537.891	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	537.9
TEST VOLTAGE(V)	277	θ @50%(H,V)	14,13DEG


		AREA FLUX DIAGRAM															UNIT:lm			Φ t	Φ a
VERTICAL (DEG)	27	0.11	0.13	0.16	0.18	0.21	0.23	0.26	0.28	0.29	0.30	0.29	0.28	0.26	0.24	0.21	0.19	0.16	0.14	3.91	0.00
	24	0.13	0.16	0.19	0.23	0.28	0.32	0.37	0.41	0.44	0.45	0.44	0.42	0.38	0.33	0.28	0.24	0.20	0.16	5.43	0.00
	21	0.15	0.18	0.22	0.27	0.32	0.38	0.44	0.49	0.53	0.55	0.54	0.50	0.45	0.39	0.33	0.28	0.23	0.19	6.45	0.00
	18	0.17	0.21	0.25	0.31	0.37	0.44	0.51	0.58	0.62	0.64	0.63	0.59	0.53	0.45	0.38	0.32	0.26	0.21	7.47	0.00
	15	0.19	0.24	0.31	0.41	0.54	0.75	1.04	1.44	1.86	2.09	1.96	1.58	1.16	0.83	0.59	0.44	0.33	0.25	16.0	7.24
	12	0.21	0.27	0.35	0.47	0.65	0.92	1.32	1.88	2.48	2.82	2.63	2.08	1.50	1.04	0.72	0.51	0.38	0.28	20.5	12.6
	9	0.23	0.30	0.40	0.54	0.76	1.10	1.61	2.32	3.10	3.54	3.30	2.59	1.83	1.25	0.84	0.59	0.43	0.31	25.0	17.5
		0.24	0.31	0.42	0.60	0.91	1.48	2.71	4.89	7.31	8.37	7.61	5.35	3.12	1.71	1.02	0.67	0.46	0.33	47.5	41.2
		0.24	0.33	0.45	0.66	1.06	1.90	3.91	7.72	12.0	13.7	12.4	8.40	4.53	2.19	1.20	0.74	0.50	0.34	72.2	66.4
		0.26	0.35	0.48	0.73	1.20	2.23	4.81	9.75	15.3	17.5	15.8	10.6	5.58	2.59	1.37	0.82	0.54	0.36	90.2	84.7
		0.25	0.34	0.48	0.72	1.18	2.19	4.69	9.46	14.8	17.0	15.3	10.3	5.43	2.54	1.35	0.81	0.53	0.36	87.7	82.1
		0.22	0.29	0.40	0.56	0.84	1.37	2.45	4.32	6.39	7.34	6.68	4.74	2.79	1.56	0.96	0.63	0.44	0.31	42.3	36.0
-9	0.21	0.28	0.37	0.51	0.73	1.09	1.68	2.55	3.50	4.02	3.72	2.83	1.89	1.23	0.83	0.57	0.41	0.30	26.7	19.7	
-12	0.20	0.26	0.35	0.46	0.62	0.81	0.91	0.79	0.73	0.84	0.83	0.93	0.99	0.90	0.70	0.51	0.38	0.28	11.5	1.73	
-15	0.16	0.21	0.28	0.36	0.48	0.66	0.95	1.36	1.79	2.02	1.88	1.47	1.04	0.73	0.53	0.39	0.29	0.22	14.8	5.83	
-18	0.14	0.18	0.23	0.29	0.36	0.44	0.55	0.67	0.78	0.84	0.80	0.70	0.58	0.47	0.38	0.30	0.24	0.18	8.12	0.00	
-21	0.12	0.15	0.18	0.22	0.23	0.22	0.16	0.08	0.04	0.02	0.03	0.06	0.13	0.21	0.23	0.21	0.18	0.15	2.60	0.00	
-24	0.10	0.12	0.15	0.18	0.20	0.20	0.20	0.22	0.24	0.25	0.24	0.23	0.20	0.19	0.19	0.18	0.15	0.12	3.36	0.00	
-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)					6	9	12	15	18	21	24	27
Φ t	3.33	4.32	5.67	7.71	10.9	16.7	28.6	49.2	72.1	82.3	75.0	53.6	32.4	18.9	12.1	8.39	6.08	4.50	492	---	
Φ a	0.00	0.00	0.00	0.00	0.35	6.67	20.9	43.6	68.0	79.0	71.5	48.8	25.6	9.56	1.11	0.00	0.00	0.00	---	375	

one-half-peak spread: U:6.7,D:6.0 , L:7.1,R:6.0NEMA Beam Type: Type 2 x 3 (H x V)

H(β) Range:-90 - 90DEG	V(B) Range:-80 - 80DEG
H(β) Interval: 1.0DEG	V(B) Interval: 5.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Temperature:28.0DEG	Humidity:83%
Operators:QC1	Test Distance:8.300m [K=1.0000]
Test Date:2025-07-31	Remarks:

ISOCANDELA DIAGRAM

Test:U:277.8V I:0.0726A P:9.460W PF:0.4741 Freq:50.00Hz Lamp Flux:537.891x1 lm		
NAME: 8.03.035.0004 10° SP-PZT-R135-6P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070082
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

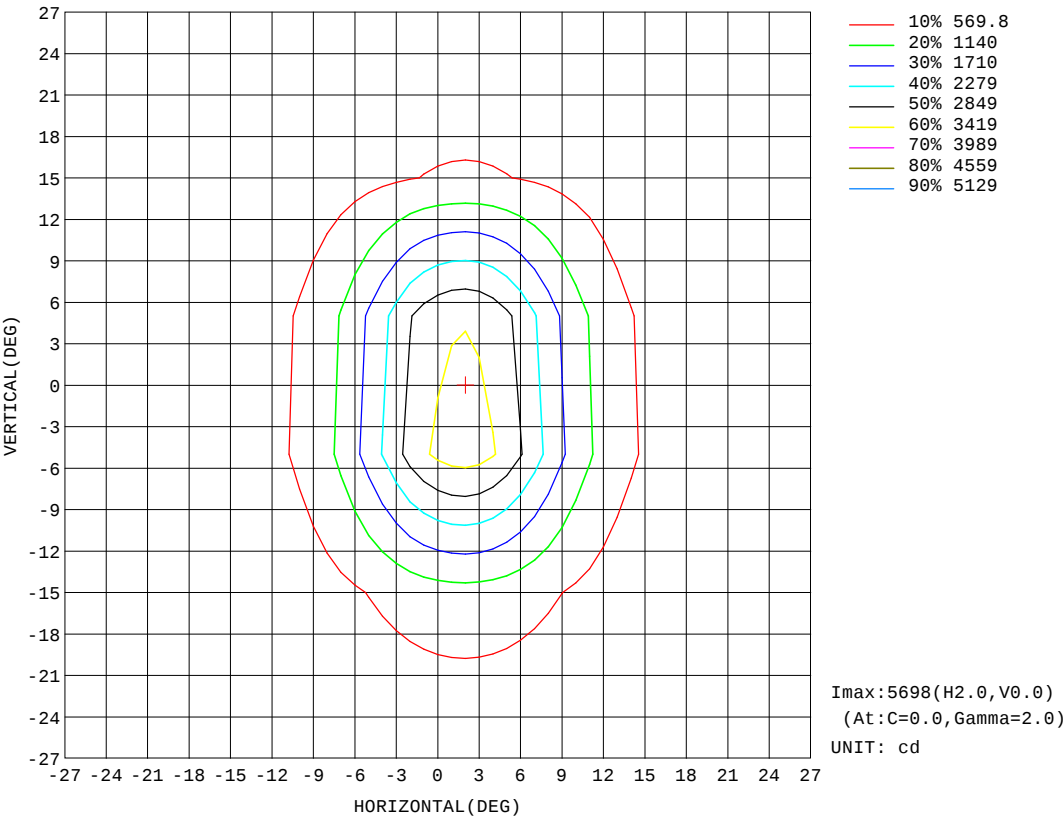


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:277.8V I:0.0726A P:9.460W PF:0.4741 Freq:50.00Hz Lamp Flux:537.891x1 lm		
NAME: 8.03.035.0004 10° SP-PZT-R135-6P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070082
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

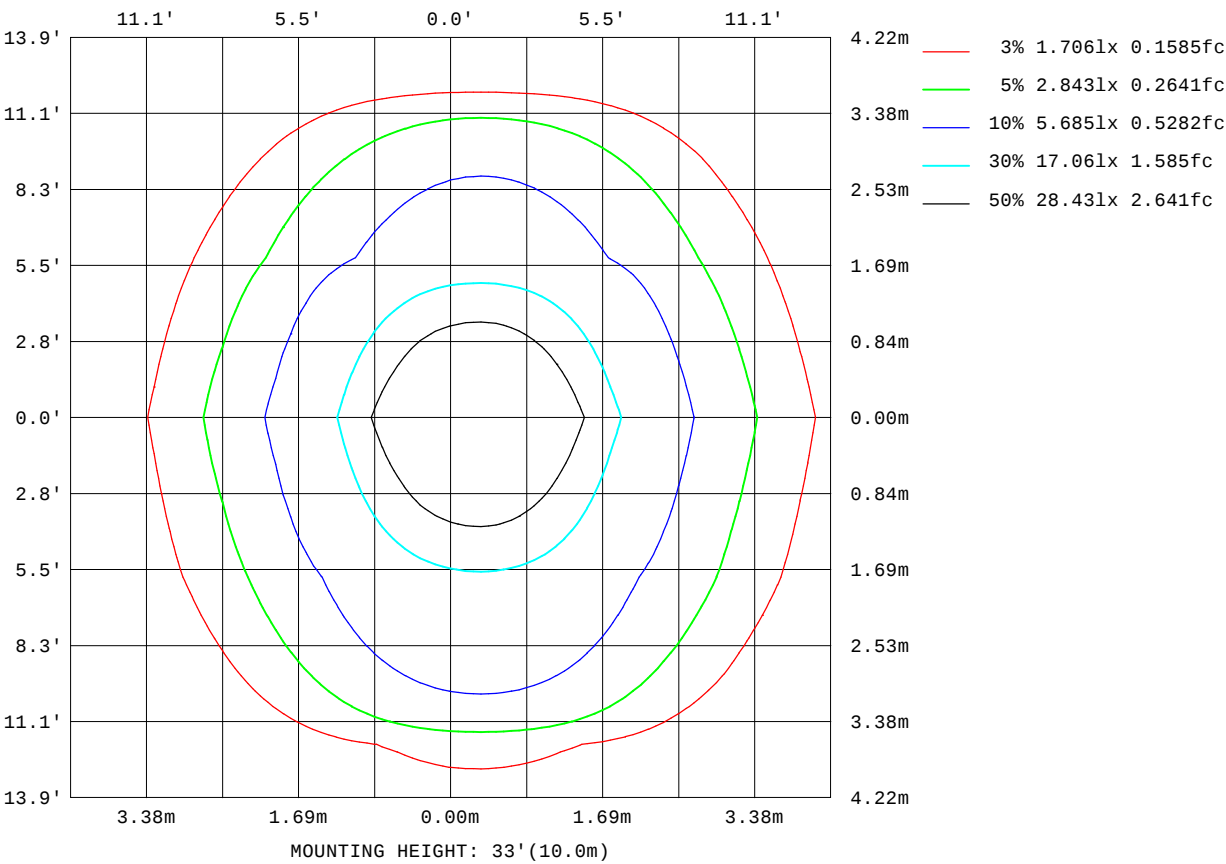

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

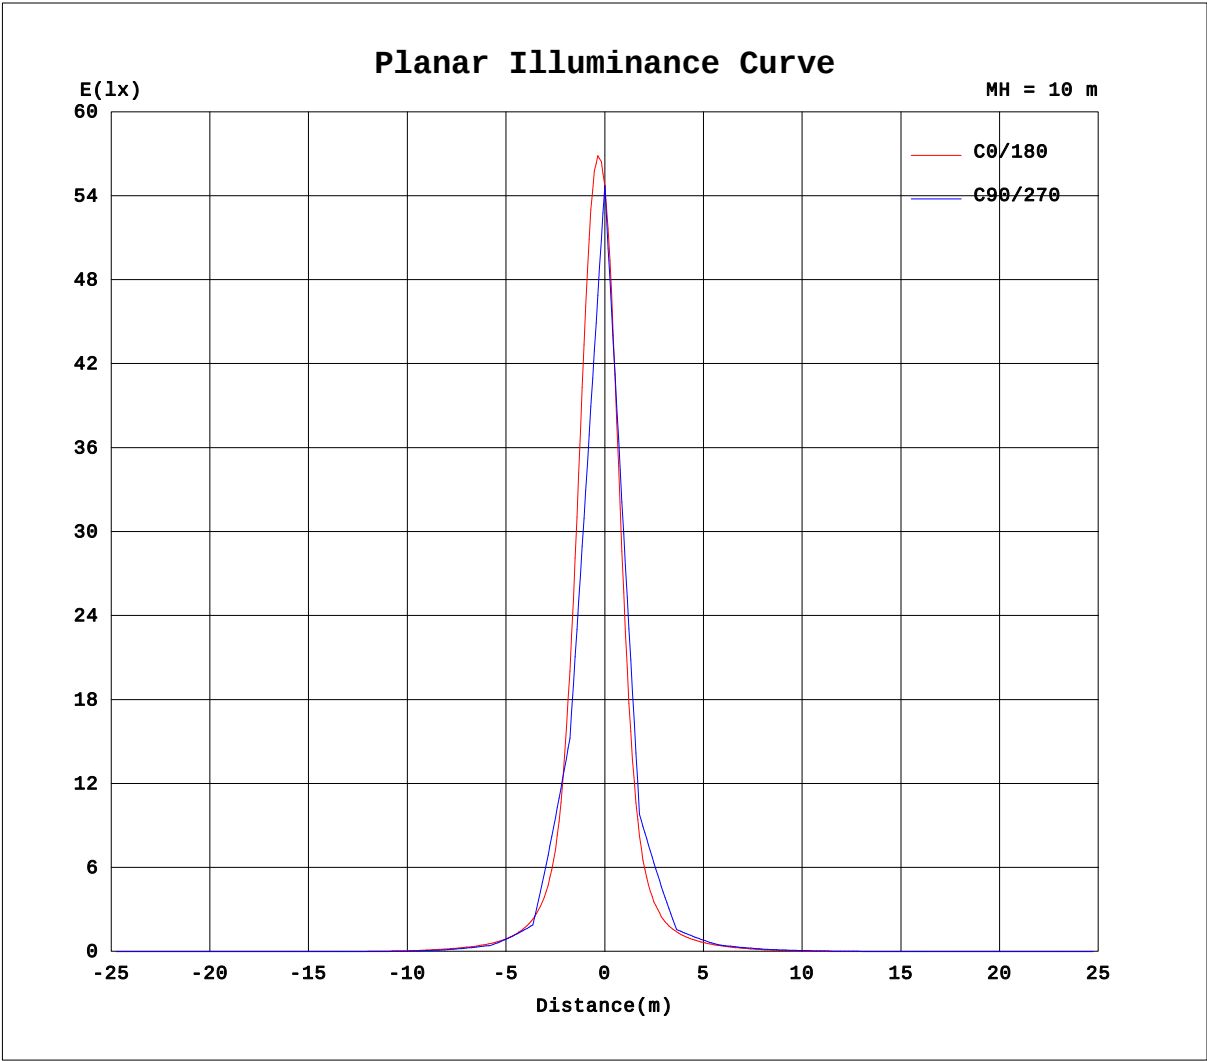


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:277.8V I:0.0726A P:9.460W PF:0.4741 Freq:50.00Hz Lamp Flux:537.891x1 lm		
NAME: 8.03.035.0004 10° SP-PZT-R135-6P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070082
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

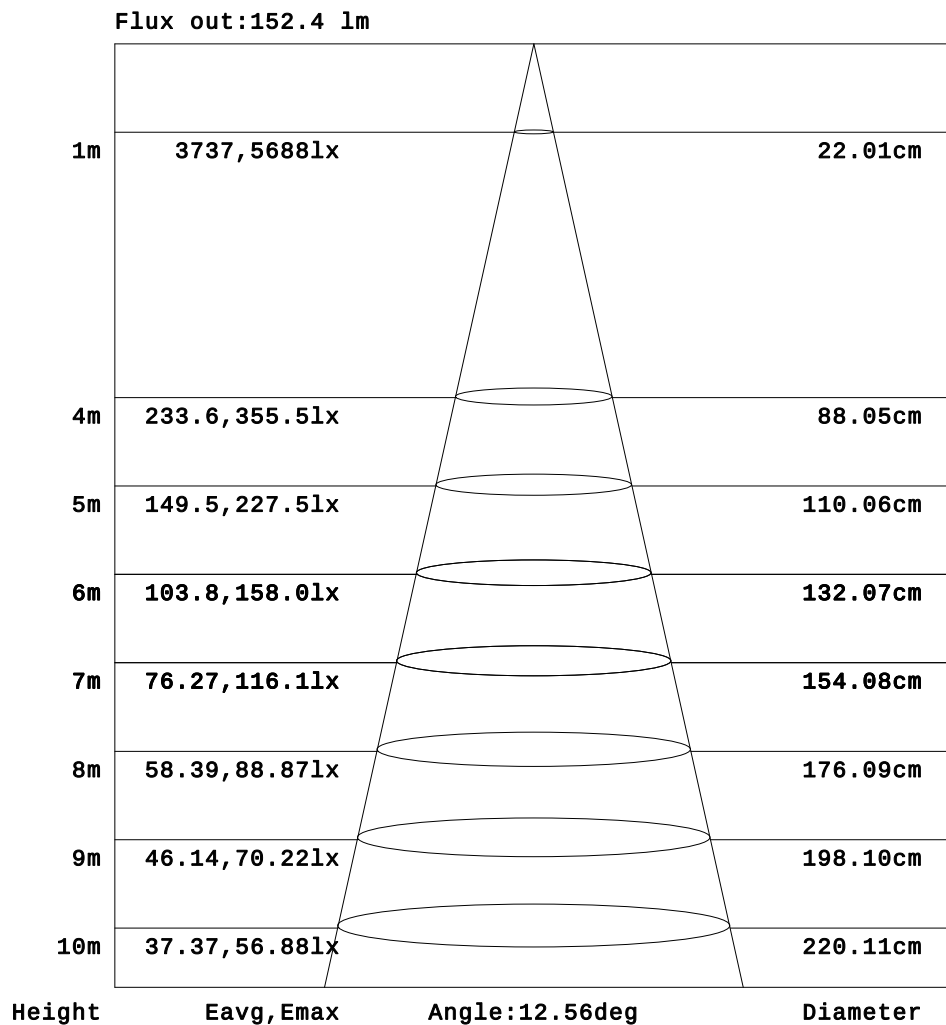

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.8V I:0.0726A P:9.460W PF:0.4741 Freq:50.00Hz Lamp Flux:537.891x1 lm		
NAME: 8.03.035.0004 10° SP-PZT-R135-6P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070082
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: cd			
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.71	2.72	4.91	7.47	9.79	11.4	12.3	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.41	5.45	9.83	14.9	19.6	22.8	24.5	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.13	4.49	9.46	16.6	24.4	32.5	39.8	44.7	47.2	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.25	8.97	17.5	27.7	39.0	50.0	60.0	66.6	70.0	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.84	8.20	16.9	28.4	42.6	60.7	82.7	108	133	150	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.69	14.2	24.8	39.4	57.5	82.3	115	155	199	231	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.40	8.22	17.8	30.5	49.3	73.5	111	175	305	586	914	
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.81	10.8	21.4	36.2	59.3	89.5	139	235	455	973	1596	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.68	12.1	23.6	40.4	64.0	97.6	155	286	660	1932	3535	
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.55	13.4	25.8	44.7	68.7	106	171	337	865	2892	5473	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.25	12.9	25.3	43.2	64.8	97.5	152	276	620	1784	3250	
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.94	12.3	24.9	41.8	60.8	89.2	134	215	375	676	1028	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.82	11.0	22.0	36.3	52.6	75.3	108	162	258	424	610	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.70	9.73	19.0	30.8	44.4	61.4	82.5	109	141	172	192	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.85	7.06	15.0	24.7	35.7	48.7	64.1	82.2	103	122	134	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.38	10.9	18.6	27.1	36.1	45.7	55.5	64.6	71.7	75.6	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.19	7.04	13.3	20.2	27.0	34.1	41.2	47.4	52.3	54.9	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.20	8.08	13.2	18.0	22.6	26.8	30.3	32.8	34.2	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.60	4.04	7.53	11.5	15.0	18.1	20.7	22.4	23.4	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.83	4.96	7.42	9.45	11.0	12.1	12.6	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.92	2.48	3.71	4.72	5.51	6.05	6.32	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.8V I:0.0726A P:9.460W PF:0.4741 Freq:50.00Hz Lamp Flux:537.891x1 lm		
NAME: 8.03.035.0004 10° SP-PZT-R135-6P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025070082
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	12.2	11.2	9.55	6.91	4.58	2.48	0.47	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	24.4	22.5	19.1	13.8	9.17	4.95	0.95	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	47.2	44.4	38.8	30.9	22.9	15.0	8.18	3.65	0.42	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	69.9	66.3	58.4	47.9	36.7	25.0	15.4	7.30	0.85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	148	128	102	77.5	55.3	37.9	24.2	13.8	5.66	1.39	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	226	190	146	107	73.9	50.9	33.1	20.3	10.5	2.78	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	858	504	270	160	100	65.3	41.6	25.0	13.7	5.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	1491	817	394	212	127	79.8	50.2	29.7	17.0	7.34	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	3213	1458	521	246	139	85.5	54.3	32.8	18.2	8.19	0.69	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	4936	2098	649	281	151	91.2	58.5	36.0	19.4	9.04	1.37	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	2956	1354	494	237	136	85.7	56.1	35.2	19.6	8.86	1.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	977	610	339	193	121	80.1	53.8	34.4	19.7	8.67	1.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	583	388	236	148	98.8	68.0	46.8	30.4	17.5	7.29	0.58	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	189	166	133	102	76.1	55.9	39.8	26.4	15.2	5.90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	132	118	98.5	78.0	60.2	45.1	32.5	21.4	12.1	3.83	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	75.4	71.1	63.6	54.4	44.3	34.3	25.2	16.4	9.04	1.77	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	54.8	52.0	47.0	40.5	33.2	25.8	18.6	11.6	5.45	0.89	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	34.3	33.0	30.3	26.5	22.1	17.2	12.0	6.80	1.87	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	23.5	22.6	20.8	18.1	14.8	10.9	6.69	3.40	0.94	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	12.6	12.3	11.3	9.65	7.49	4.63	1.39	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	6.32	6.13	5.63	4.83	3.75	2.32	0.69	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-07-31

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: