

LED Test Report

Product Mark

Product Type :SP-PZT-R135-6P-RDM

Manufacturer :TPK

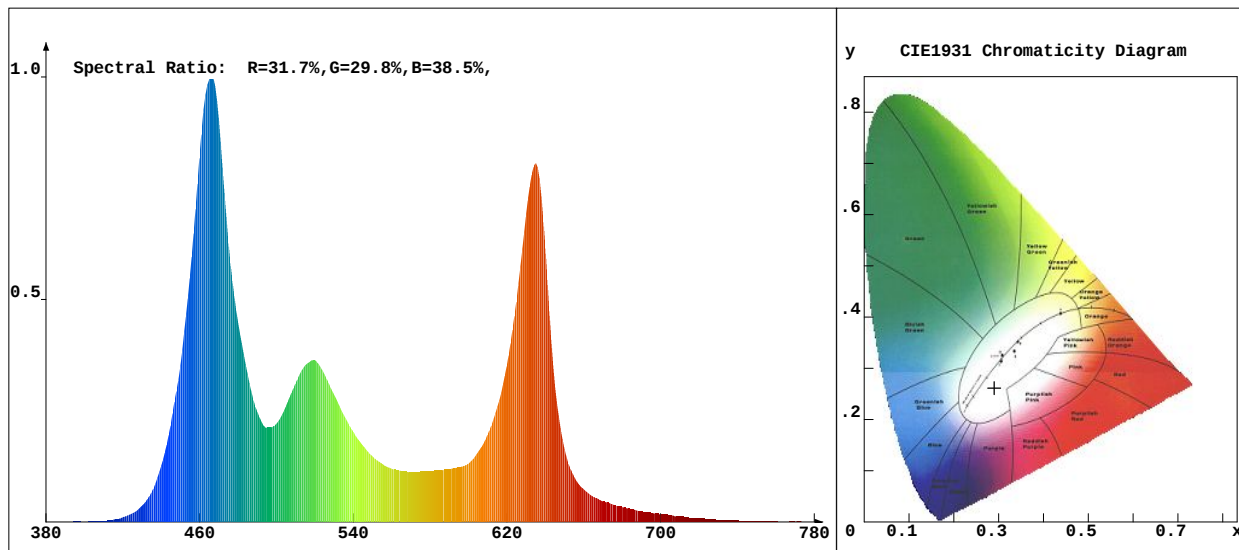
Temperature :22.5'C

Humidity :42%

Operator :qc1

Test Date :2025-07-31 16:18:19

Remark:8.03.035.0004 10° SP-PZT-R135-6P-RDM

**Chroma Parameters**

Chro.Coar.:x=0.2907 y=0.2615 u=0.2093 v=0.2824 duv=-0.0219

CCT:10570K Dominant Wave.:455.9nm Purity:23.2%

Flux RGB Ratio:R=25.0%,G=65.2%,B=9.8% Peak Wave:466.7nm Half Width:24.5nm

Rendering Index:Ra= 36.8

R1 =15 R2 =44 R3 =78 R4 =34 R5 =31 R6 =40 R7 =61 R8 =-8

R9 =-211 R10=-22 R11=24 R12=33 R13=18 R14=84 R15=-3

Photo Parameters

Flux:1087.77lm

Effi.:37.1lm/W

Radiant:4701.8mW

Iv:0.0mcd

Efficiency:0.356

Effi Level:B (EU 874-2012)

Ele. Parameters

Voltage:U=277.200V

Current:I=0.1830A

Power:P=29.31W

Power Factor:PF=0.575

Instrument state

Instrument:Hopoo HP8000S

Integral Time: 38.842ms

VPeak: 13673

VDark: 1097

Scan Range: 380-780nm

Product ID: 201605038