

LED Test Report

Product Mark

Product Type :SP-PZT-R135-6P-RDM-B

Manufacturer :TPK

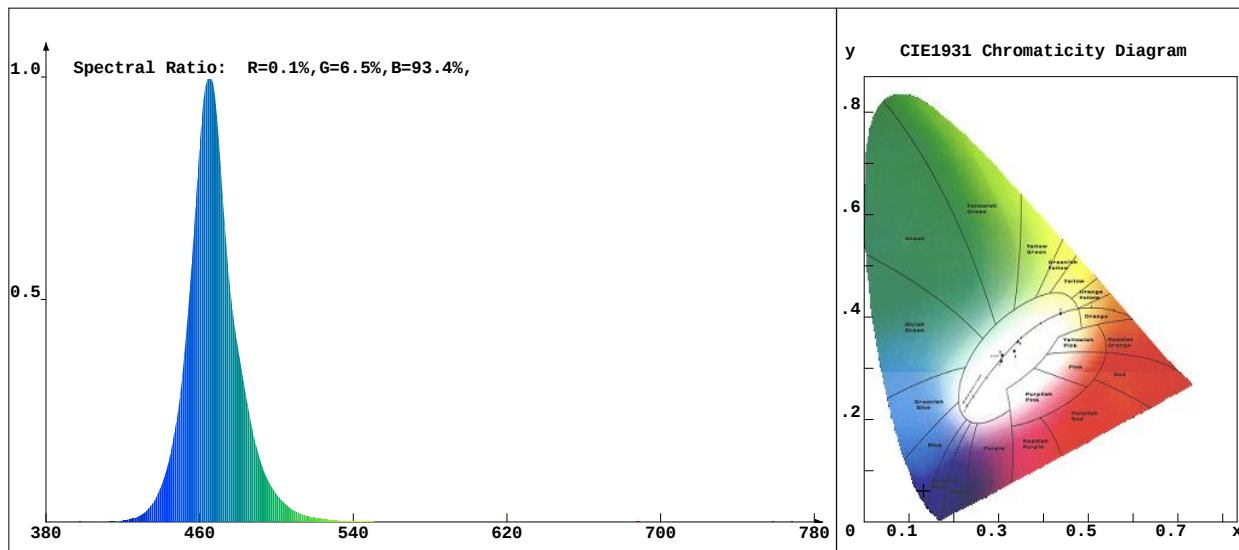
Temperature :22.5'C

Humidity :42%

Operator :qc1

Test Date :2025-07-31 16:15:27

Remark:8.03.035.0004 10° SP-PZT-R135-6P-RDM-B

**Chroma Parameters**

Chro.Coord.:x=0.1325 y=0.0612 u=0.1528 v=0.1058 duv=-0.0127

CCT:100000K Dominant Wave.:469.0nm Purity:97.2%

Flux RGB Ratio:R=0.3%,G=22.8%,B=76.9% Peak Wave:464.5nm Half Width:22.1nm

Rendering Index:Ra=-52.6

R1 =-18 R2 =-46 R3 =-133 R4 =-80 R5 =-4 R6 =-60 R7 =-45 R8 =-33

R9 =-288 R10=-238 R11=-112 R12=-110 R13=-37 R14=-29 R15=-0

Photo Parameters

Flux:134.32lm

Effi.:13.9lm/W

Radiant:1852.7mW

Iv:0.0mcd

Efficiency:0.576

Effi Level:B (EU 874-2012)

Ele. Parameters

Voltage:U=277.400V

Current:I=0.0730A

Power:P=9.67W

Power Factor:PF=0.474

Instrument state

Instrument:Hopoo HP8000S

Integral Time: 37.014ms

VPeak: 13833

VDark: 1216

Scan Range: 380-780nm

Product ID: 201605038