

Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity	11940.7 cd per klm.
(Luminaire orientation as tested.)	0.0 degrees vertical
	0.0 degrees horizontal

Beam Spread	At 10% of Imax	30.5V x 26.7H
	At 50% of Imax	10.1V x 13.4H
	At 90% of Imax	3.4V x 5.4H

Beam Flux	Total	976.1 lumens per klm.
	To 10% of Imax	710.1 lumens per klm.
	To 50% of Imax	309.3 lumens per klm.
	To 90% of Imax	31.4 lumens per klm.

Upward LOR	0.0 %
Downward LOR	97.6 %


Luminaire Efficiency(Light Output Ratio)	100.0 %
--	---------

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.5V I:0.0833A P:5.334W PF:0.5315 Freq:50.00Hz Lamp Flux:299.764x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080006
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

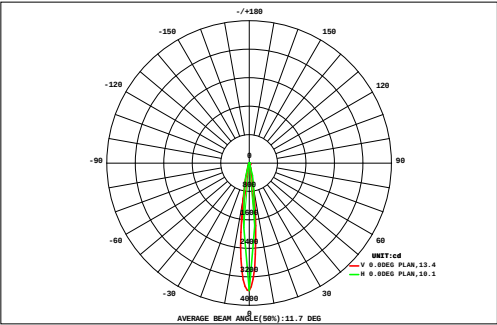

DATA OF LAMP		Eff:56.20lm/W	
MODE:SP-PZT-R110-3P-RDM-G		Imax(cd)	3579
NOMINAL POWER(W)	5	AVAILABILITY(%)	76.3
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	228.8
NOMINAL FLUX(lm)	299.764	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	299.8
TEST VOLTAGE(V)	120	θ @50%(H,V)	13,10DEG

		AREA FLUX DIAGRAM															UNIT:lm			Φ t	Φ a
VERTICAL (DEG)	27	0.04	0.05	0.06	0.07	0.09	0.10	0.11	0.13	0.14	0.14	0.13	0.12	0.11	0.09	0.08	0.06	0.05	1.70	0.00	
	24	0.03	0.05	0.06	0.08	0.10	0.13	0.16	0.19	0.22	0.24	0.24	0.23	0.21	0.18	0.15	0.12	0.10	0.08	2.58	0.00
	21	0.05	0.07	0.09	0.12	0.15	0.19	0.23	0.26	0.29	0.30	0.29	0.26	0.23	0.19	0.16	0.13	0.10	0.08	3.20	0.00
	18	0.08	0.10	0.13	0.16	0.21	0.25	0.30	0.34	0.36	0.36	0.34	0.30	0.25	0.20	0.16	0.12	0.10	0.07	3.83	0.00
	15	0.06	0.08	0.11	0.15	0.22	0.32	0.48	0.74	1.12	1.48	1.59	1.36	0.97	0.64	0.42	0.28	0.19	0.14	10.4	5.95
	12	0.07	0.10	0.14	0.20	0.31	0.48	0.75	1.17	1.71	2.09	2.07	1.66	1.13	0.72	0.46	0.31	0.21	0.15	13.7	9.64
	9	0.11	0.16	0.23	0.34	0.53	0.83	1.32	2.06	2.73	2.83	2.28	1.48	0.89	0.55	0.35	0.23	0.16	0.11	17.2	13.2
	6	0.09	0.13	0.19	0.27	0.43	0.71	1.25	2.38	4.02	5.35	5.36	4.23	2.65	1.40	0.73	0.41	0.25	0.17	30.0	26.6
	3	0.06	0.09	0.13	0.19	0.30	0.55	1.14	2.67	5.38	8.10	8.78	7.31	4.62	2.37	1.16	0.61	0.36	0.23	44.0	41.0
	0	0.13	0.19	0.29	0.47	0.87	1.78	4.09	7.75	10.9	10.9	8.38	4.83	2.21	0.99	0.51	0.30	0.19	0.13	54.8	51.8
	-3	0.12	0.18	0.27	0.45	0.81	1.66	3.78	7.17	10.1	10.3	8.10	4.81	2.29	1.06	0.54	0.31	0.20	0.13	52.3	49.2
	-6	0.06	0.08	0.10	0.13	0.15	0.14	0.13	0.33	1.36	3.59	4.92	4.78	3.37	1.86	0.95	0.52	0.31	0.20	23.0	20.4
-9	0.08	0.11	0.15	0.20	0.28	0.42	0.61	0.86	1.04	1.61	2.06	2.00	1.49	0.91	0.52	0.32	0.21	0.14	13.0	9.36	
-12	0.11	0.15	0.21	0.30	0.45	0.65	0.86	0.91	0.57	0.13	0.00	0.00	0.00	0.01	0.05	0.08	0.08	0.07	4.62	0.47	
-15	0.04	0.06	0.08	0.11	0.14	0.18	0.24	0.33	0.51	0.81	1.01	0.96	0.75	0.53	0.36	0.24	0.17	0.12	6.64	1.19	
-18	0.03	0.05	0.06	0.07	0.07	0.07	0.08	0.07	0.09	0.26	0.52	0.60	0.52	0.39	0.28	0.20	0.14	0.10	3.61	0.00	
-21	0.06	0.07	0.09	0.11	0.13	0.13	0.12	0.08	0.03	0.01	0.00	0.00	0.01	0.02	0.04	0.04	0.04	0.04	1.04	0.00	
-24	0.03	0.04	0.06	0.07	0.08	0.09	0.09	0.08	0.09	0.10	0.11	0.11	0.10	0.09	0.07	0.06	0.05	0.04	1.35	0.00	
-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)				6	9	12	15	18	21	24	27	
Φ t	1.25	1.75	2.45	3.51	5.31	8.69	15.7	27.5	40.7	48.6	46.2	35.1	21.8	12.2	6.99	4.36	2.92	2.04	287	---	
Φ a	0.00	0.00	0.00	0.00	0.89	3.52	11.4	24.2	38.2	46.4	43.9	32.5	18.1	7.55	2.20	0.00	0.00	0.00	---	229	


one-half-peak spread: U:5.0,D:5.1 , L:6.0,R:7.5,EMA Beam Type: Type 2 x 3 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.5V I:0.0833A P:5.334W PF:0.5315 Freq:50.00Hz Lamp Flux:299.764x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080006
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

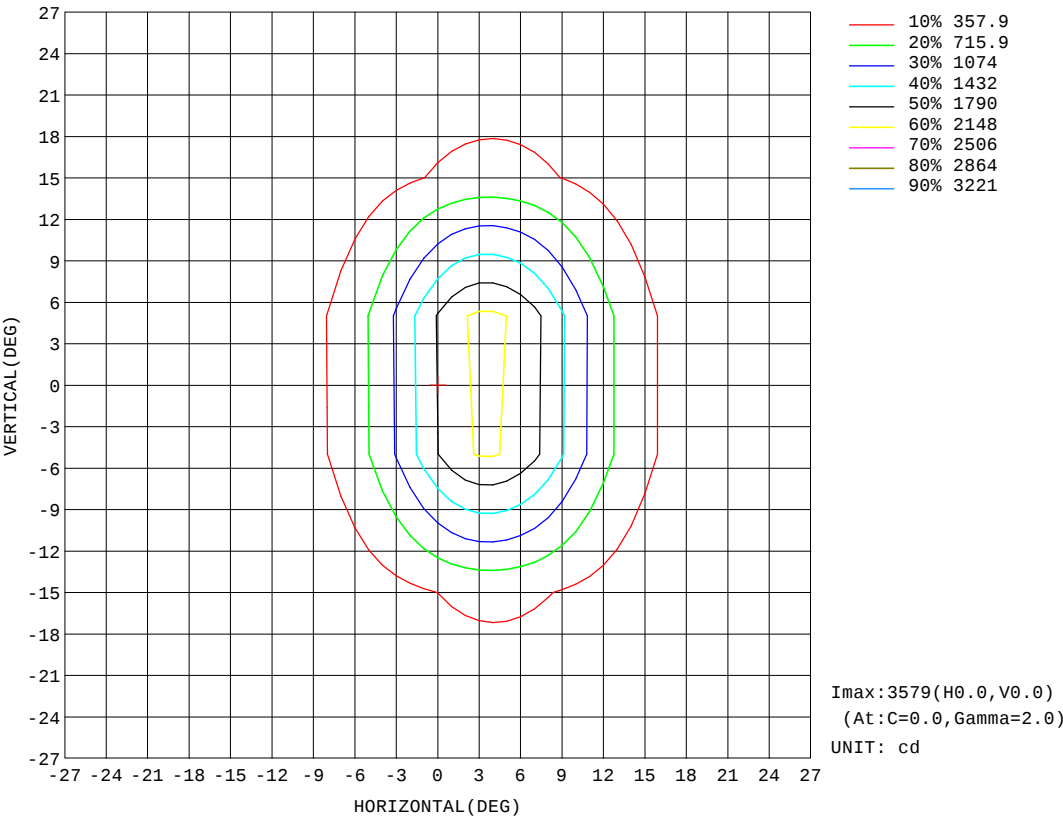


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:120.5V I:0.0833A P:5.334W PF:0.5315 Freq:50.00Hz Lamp Flux:299.764x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080006
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

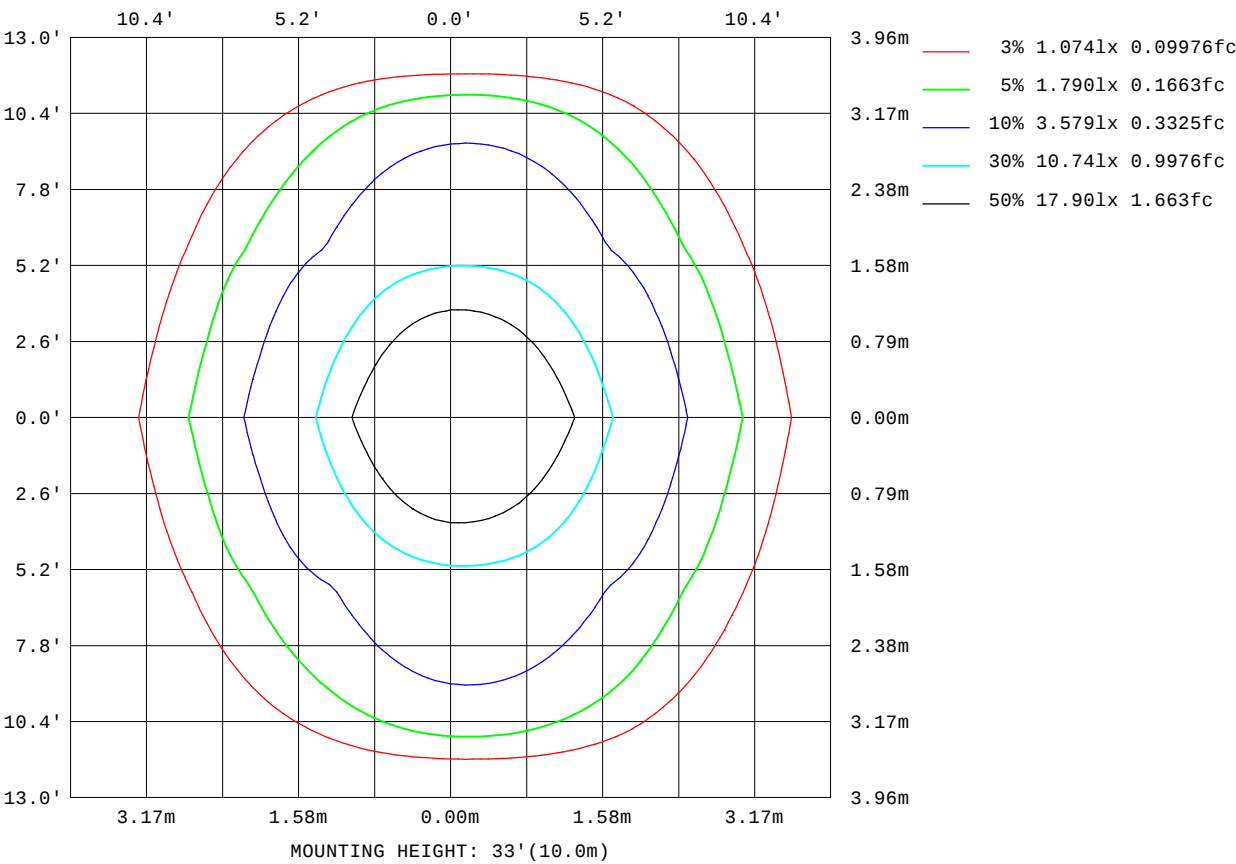

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

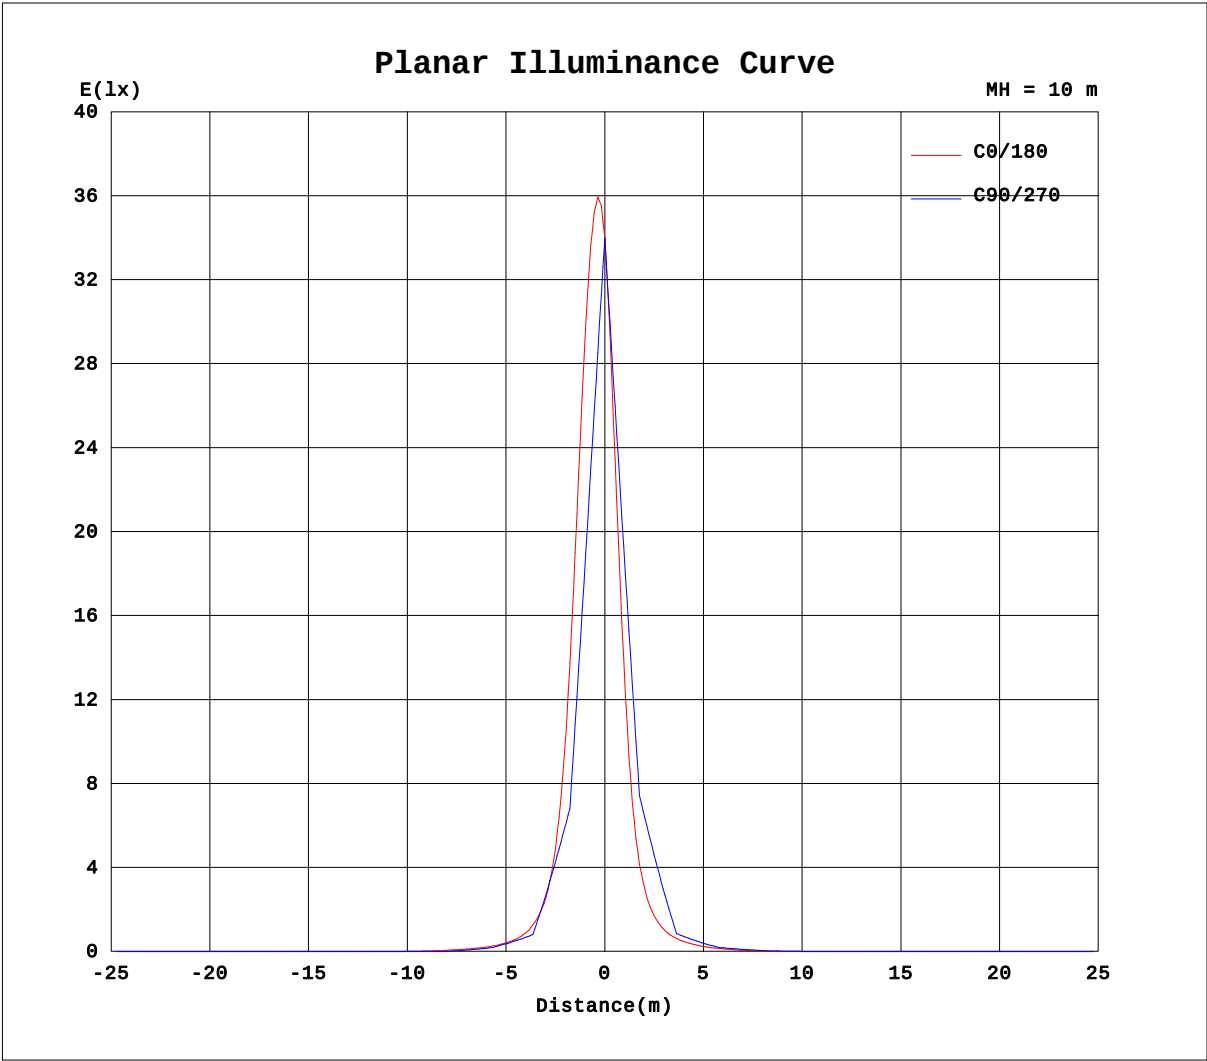


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.5V I:0.0833A P:5.334W PF:0.5315 Freq:50.00Hz Lamp Flux:299.764x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080006
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

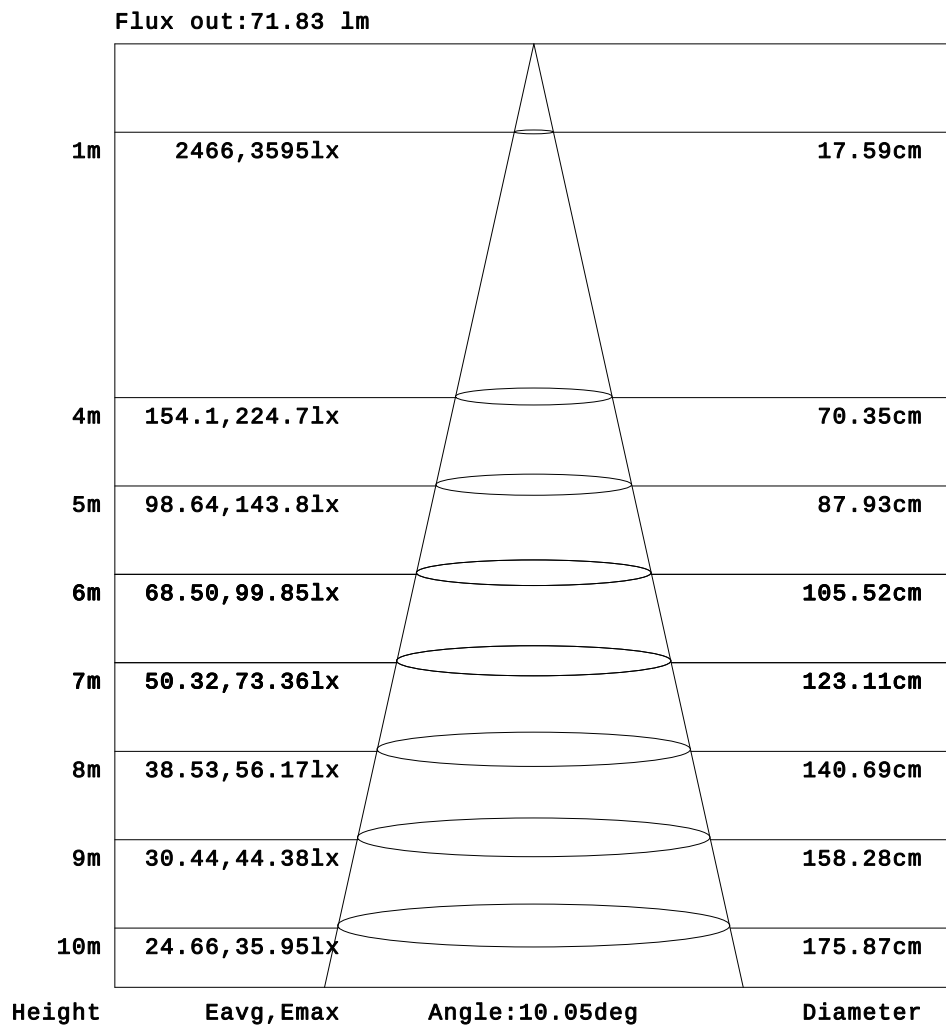

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.5V I:0.0833A P:5.334W PF:0.5315 Freq:50.00Hz Lamp Flux:299.764x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080006
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: cd			
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	3.48	7.12	9.97	12.4	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.60	11.6	17.7	23.0	27.1	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.44	4.23	8.56	17.5	28.2	39.4	51.4	61.6	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.44	13.3	23.3	36.1	51.8	70.3	88.9	100	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	3.99	12.5	23.1	38.9	64.2	111	202	360	
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.93	12.4	23.6	40.2	68.8	124	248	492	768	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.05	8.45	18.4	32.5	56.5	105	240	712	1785	
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.44	15.7	28.7	49.9	92.5	209	642	2155	3579	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.52	8.99	18.7	32.9	56.6	106	243	723	1816	
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.14	13.3	24.2	40.6	69.0	127	260	541	829	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.55	6.03	13.8	24.2	39.4	64.7	115	215	394	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.59	7.65	15.0	24.3	36.6	53.2	73.8	94.6	106	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.95	6.62	12.9	20.7	30.2	42.1	55.2	66.1	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.96	5.63	10.5	15.6	21.0	26.0	30.2	32.2	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.42	3.72	6.79	10.6	14.3	17.5	19.8	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.17	2.53	4.71	6.56	7.99	8.74	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.55	1.72	2.75	3.60	4.20	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.5V I:0.0833A P:5.334W PF:0.5315 Freq:50.00Hz Lamp Flux:299.764x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM-G	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080006
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	14.7	14.0	12.2	9.62	6.88	4.31	1.93	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	28.7	26.0	21.4	16.0	10.6	5.73	1.24	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	65.0	59.2	47.7	35.3	24.4	15.7	8.79	3.38	0.69	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	96.4	79.3	58.9	40.9	27.3	17.1	9.32	3.58	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	435	304	163	88.2	51.1	30.9	18.3	9.66	3.32	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	642	346	165	84.9	48.3	28.4	16.3	7.90	1.88	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	2118	1241	435	163	77.5	43.0	25.0	13.8	6.09	0.50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	2697	1010	300	118	59.7	33.6	19.3	9.85	3.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	2146	1250	434	162	77.8	43.5	25.5	14.4	6.53	0.65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	680	345	164	85.1	49.1	29.5	17.4	8.90	2.59	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	466	315	162	88.5	52.2	32.3	19.8	11.1	4.50	0.23	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	99.9	81.2	60.6	42.5	29.1	19.0	11.2	5.03	0.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	69.0	61.9	49.7	37.4	26.6	18.0	11.1	5.46	1.43	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	31.5	28.5	23.9	18.6	13.3	8.36	3.98	0.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	20.5	19.5	17.0	13.7	9.95	6.19	3.28	1.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	8.72	7.76	6.20	4.28	2.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	4.41	4.21	3.60	2.73	1.72	0.58	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: