

Floodlight Summary:


Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)		12291.4 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	31.0V x 26.7H
	At 50% of Imax	10.1V x 13.7H
	At 90% of Imax	3.4V x 5.6H
Beam Flux	Total	972.3 lumens per klm.
	To 10% of Imax	755.3 lumens per klm.
	To 50% of Imax	333.0 lumens per klm.
	To 90% of Imax	35.9 lumens per klm.
Upward LOR		0.0 %
Downward LOR		97.2 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG	V(B) Range:-80 - 80DEG
H(β) Interval: 1.0DEG	V(B) Interval: 5.0DEG
Test Speed: HIGH	Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Temperature:28.0DEG	Humidity:83%
Operators:QC1	Test Distance:8.300m [K=1.0000]
Test Date:2025-08-01	Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.7V I:0.0679A P:4.235W PF:0.5166 Freq:50.00Hz Lamp Flux:177.577x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080005
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

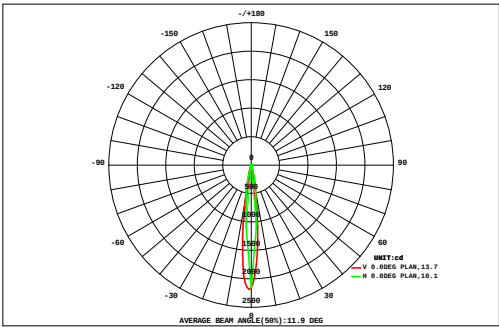

DATA OF LAMP		Eff:41.93lm/W	
MODE:SP-PZT-R110-3P-RDM-R		Imax(cd)	2183
NOMINAL POWER(W)	4	AVAILABILITY(%)	81.0
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	143.8
NOMINAL FLUX(lm)	177.577	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	177.6
TEST VOLTAGE(V)	120	θ @50%(H,V)	14,10DEG


		AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
VERTICAL (DEG)	27	0.00	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.06	0.07	0.07	0.06	0.05	0.04	0.03	0.02	0.01	0.01	0.64	0.00		
	24	0.01	0.01	0.02	0.03	0.04	0.06	0.08	0.10	0.12	0.13	0.13	0.13	0.11	0.09	0.08	0.06	0.04	0.03	1.27	0.00		
	21	0.01	0.03	0.04	0.05	0.07	0.10	0.12	0.15	0.16	0.17	0.17	0.15	0.13	0.10	0.08	0.06	0.04	0.03	1.66	0.00		
	18	0.02	0.04	0.06	0.08	0.11	0.14	0.17	0.20	0.21	0.21	0.20	0.17	0.14	0.11	0.08	0.06	0.04	0.02	2.06	0.00		
	15	0.02	0.03	0.05	0.08	0.12	0.18	0.30	0.49	0.72	0.93	1.01	0.88	0.63	0.40	0.25	0.16	0.10	0.07	6.42	4.01		
	12	0.02	0.04	0.07	0.11	0.18	0.29	0.49	0.77	1.10	1.33	1.33	1.08	0.74	0.46	0.29	0.18	0.11	0.07	8.67	6.37		
	9	0.05	0.08	0.13	0.20	0.32	0.54	0.90	1.34	1.73	1.81	1.50	0.99	0.58	0.34	0.20	0.12	0.08	0.05	11.0	8.72		
		0.04	0.06	0.10	0.16	0.26	0.45	0.84	1.54	2.48	3.25	3.35	2.74	1.70	0.88	0.44	0.24	0.14	0.08	18.7	16.8		
		0.02	0.04	0.06	0.10	0.18	0.32	0.75	1.72	3.27	4.81	5.40	4.69	2.97	1.48	0.71	0.37	0.20	0.12	27.2	25.5		
		0.06	0.10	0.16	0.29	0.54	1.22	2.61	4.65	6.42	6.72	5.42	3.07	1.34	0.59	0.29	0.16	0.09	0.06	33.8	32.1		
		0.06	0.09	0.15	0.27	0.51	1.13	2.41	4.31	6.00	6.37	5.22	3.05	1.38	0.62	0.31	0.17	0.10	0.06	32.2	30.4		
		0.02	0.03	0.04	0.06	0.07	0.06	0.09	0.26	0.90	2.08	2.94	3.04	2.14	1.13	0.56	0.30	0.17	0.10	14.0	12.6		
-9	0.03	0.05	0.07	0.11	0.16	0.25	0.39	0.56	0.67	0.96	1.21	1.23	0.91	0.53	0.29	0.17	0.10	0.06	7.76	5.85			
-12	0.05	0.07	0.11	0.17	0.26	0.39	0.54	0.62	0.41	0.11	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.02	2.80	0.66			
-15	0.01	0.02	0.03	0.04	0.06	0.09	0.12	0.19	0.33	0.50	0.61	0.58	0.44	0.29	0.19	0.12	0.08	0.05	3.77	0.79			
-18	0.00	0.01	0.02	0.02	0.03	0.03	0.03	0.04	0.05	0.16	0.31	0.36	0.30	0.21	0.15	0.10	0.06	0.04	1.91	0.00			
-21	0.01	0.02	0.04	0.05	0.06	0.06	0.05	0.03	0.01	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.36	0.00			
-24	0.01	0.01	0.02	0.02	0.03	0.03	0.03	0.04	0.04	0.05	0.05	0.05	0.04	0.04	0.03	0.02	0.02	0.01	0.54	0.00			
-27		-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)				6	9	12	15	18	21	24	27		
Φ t	0.44	0.73	1.17	1.85	3.01	5.38	9.98	17.1	24.7	29.7	28.9	22.3	13.6	7.32	4.01	2.34	1.43	0.90	175	---			
Φ a	0.00	0.00	0.00	0.00	0.62	2.62	7.69	15.3	23.3	28.3	27.7	20.8	11.5	4.50	1.33	0.00	0.00	0.00	---	144			

one-half-peak spread: U:5.0,D:5.1 , L:7.1,R:6NEMA Beam Type: Type 2 x 3 (H x V)

H(β) Range:-90 - 90DEG	V(B) Range:-80 - 80DEG
H(β) Interval: 1.0DEG	V(B) Interval: 5.0DEG
Test Speed: HIGH	Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Temperature:28.0DEG	Humidity:83%
Operators:QC1	Test Distance:8.300m [K=1.0000]
Test Date:2025-08-01	Remarks:

ISOCANDELA DIAGRAM

Test:U:120.7V I:0.0679A P:4.235W PF:0.5166 Freq:50.00Hz Lamp Flux:177.577x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080005
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

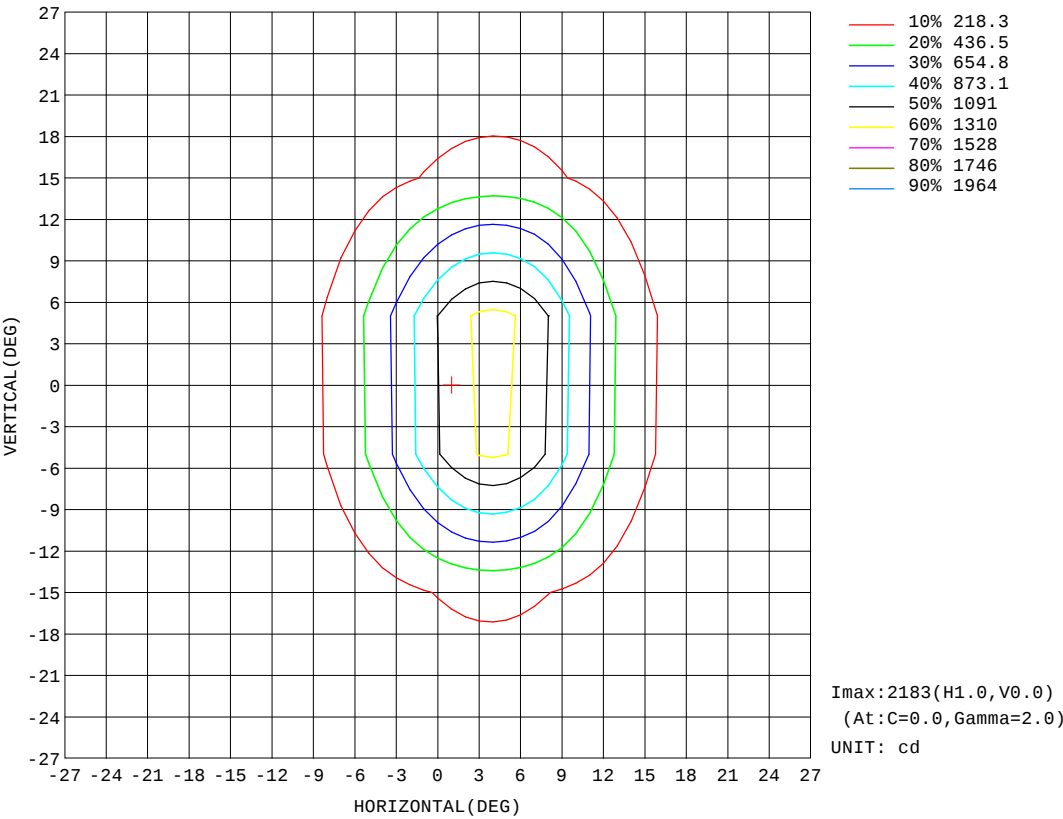


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:120.7V I:0.0679A P:4.235W PF:0.5166 Freq:50.00Hz Lamp Flux:177.577x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080005
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

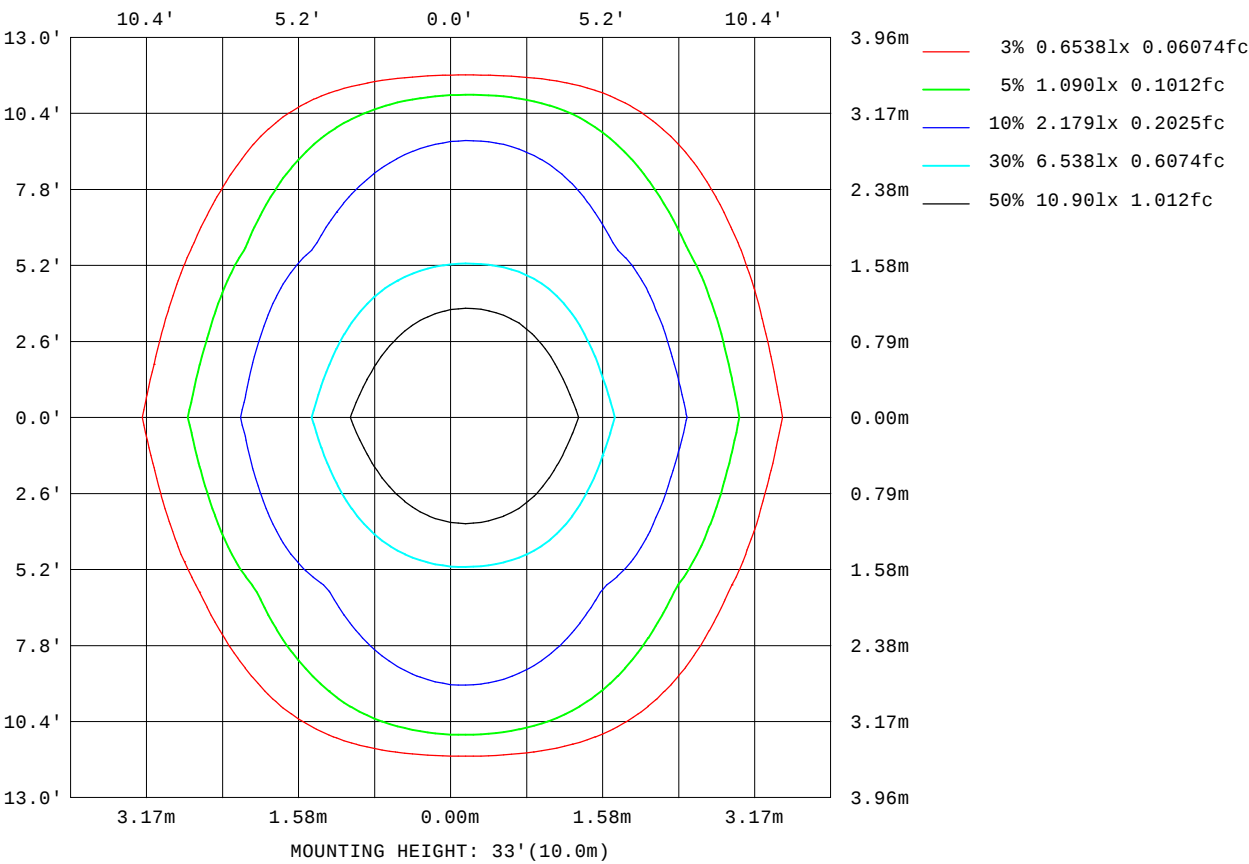

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

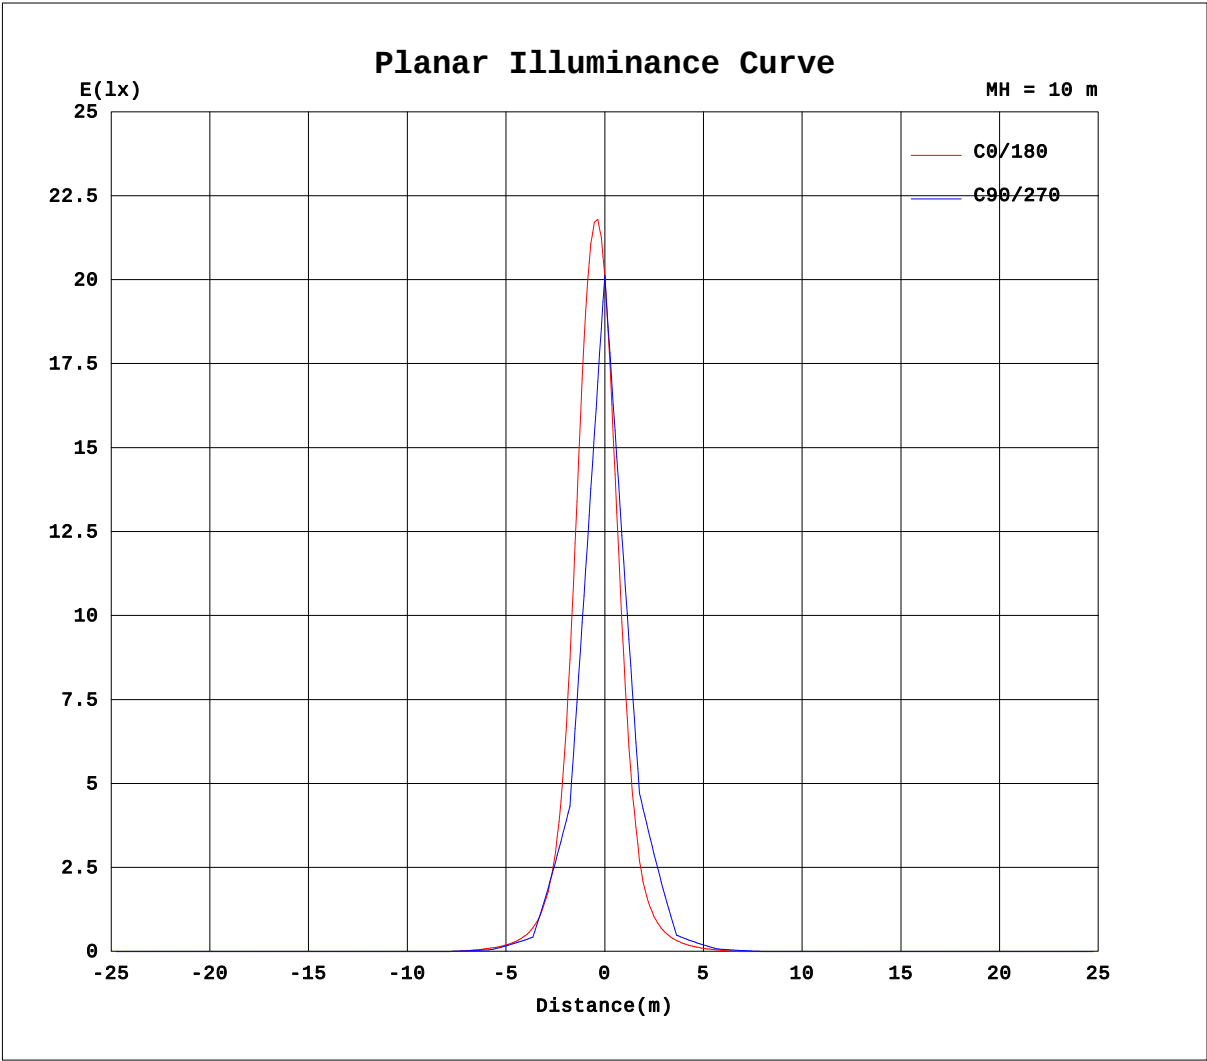


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.7V I:0.0679A P:4.235W PF:0.5166 Freq:50.00Hz Lamp Flux:177.577x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080005
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

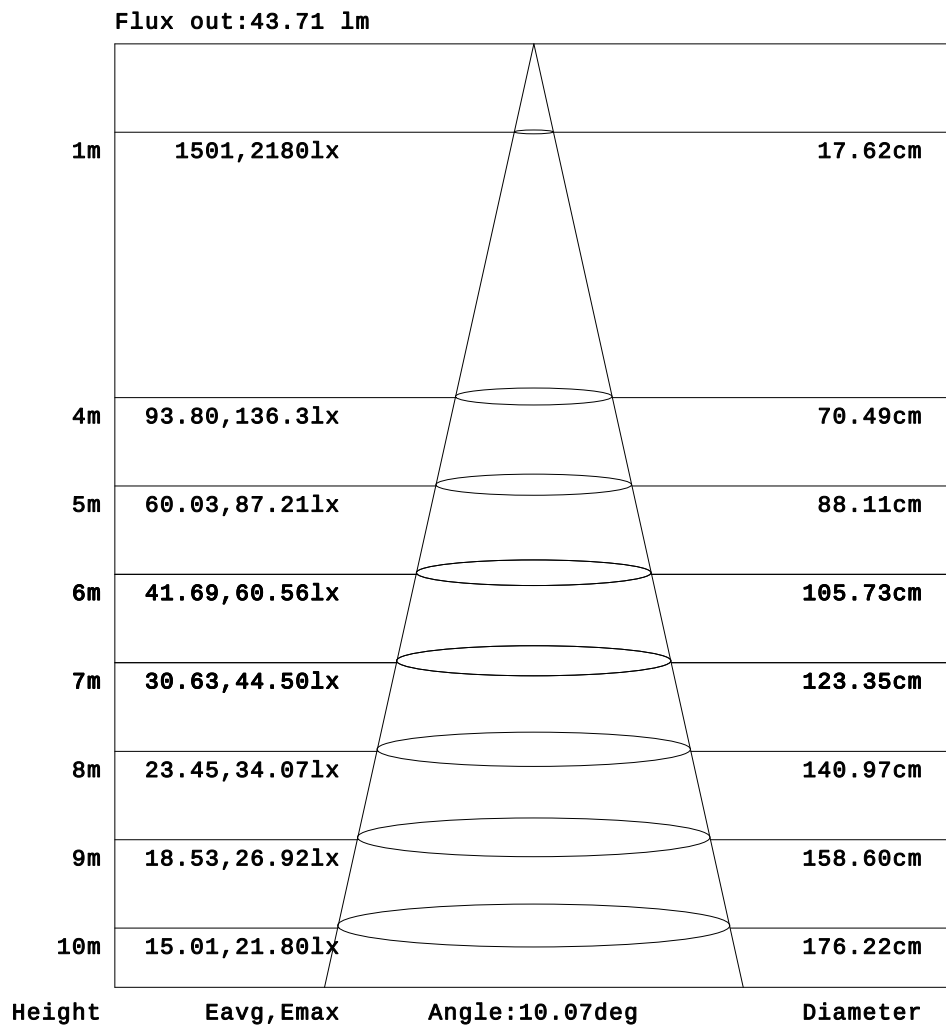

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.7V I:0.0679A P:4.235W PF:0.5166 Freq:50.00Hz Lamp Flux:177.577x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080005
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: cd			
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.20	1.90	3.44	4.46	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.49	5.71	8.26	9.56	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.32	4.59	9.02	16.2	23.8	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.54	6.32	14.0	23.7	35.9	47.3	53.5	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.41	6.46	15.9	31.8	61.7	124	227	
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.47	6.97	16.9	34.8	70.8	151	322	481	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.96	12.4	27.2	59.4	147	458	1076	
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.32	10.2	23.3	51.3	129	434	1316	2156	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.11	12.6	27.7	60.1	150	471	1094	
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.66	7.41	17.5	36.0	74.1	169	355	526	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.56	7.16	16.7	33.0	65.9	139	248	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.47	7.03	14.6	25.2	38.7	52.4	60.7	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.75	4.90	10.6	18.2	26.9	34.3	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.36	4.75	8.09	10.8	12.3	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.35	3.06	4.66	5.80	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.7V I:0.0679A P:4.235W PF:0.5166 Freq:50.00Hz Lamp Flux:177.577x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080005
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	4.81	4.43	3.47	2.08	0.50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	9.29	7.85	5.32	2.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	31.5	27.4	20.5	13.4	7.08	3.05	0.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	49.9	39.1	27.0	16.6	8.68	2.58	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	265	178	89.8	44.5	22.7	10.9	3.21	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	392	200	90.5	42.6	21.2	9.31	1.77	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	1314	784	259	91.3	39.1	18.3	7.10	0.40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	1739	627	183	65.0	28.7	12.4	3.44	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	1341	806	266	94.1	40.2	18.7	7.33	0.47	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	445	223	99.4	45.8	22.5	9.89	2.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	295	203	99.9	48.8	24.7	11.8	3.76	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	56.9	44.3	30.5	18.7	9.91	3.36	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	36.5	31.9	23.9	15.7	8.70	3.53	0.58	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	12.0	10.2	7.36	4.01	0.45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	6.19	5.72	4.59	3.03	1.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: