


Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)		11936.8 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	30.6V x 26.5H
	At 50% of Imax	9.9V x 13.1H
	At 90% of Imax	3.4V x 5.1H
Beam Flux	Total	977.8 lumens per klm.
	To 10% of Imax	697.2 lumens per klm.
	To 50% of Imax	300.0 lumens per klm.
	To 90% of Imax	30.6 lumens per klm.
Upward LOR		0.0 %
Downward LOR		97.8 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.6V I:0.0829A P:5.264W PF:0.5268 Freq:50.00Hz Lamp Flux:302.863x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080008
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

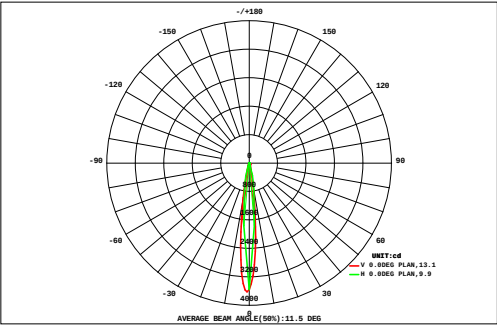

DATA OF LAMP		Eff:57.53lm/W	
MODE:SP-PZT-R110-3P-RDM-W		Imax(cd)	3615
NOMINAL POWER(W)	5	AVAILABILITY(%)	74.8
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	226.5
NOMINAL FLUX(lm)	302.863	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	302.9
TEST VOLTAGE(V)	120	θ @50%(H,V)	13,10DEG

AREA FLUX DIAGRAM																	UNIT:lm			Φ t	Φ a
27	0.04	0.05	0.07	0.08	0.10	0.11	0.13	0.14	0.15	0.15	0.15	0.13	0.12	0.10	0.08	0.07	0.05	1.86	0.00		
24	0.04	0.05	0.07	0.09	0.11	0.14	0.17	0.20	0.23	0.25	0.25	0.22	0.19	0.16	0.14	0.11	0.09	2.76	0.00		
21	0.06	0.08	0.10	0.13	0.16	0.20	0.24	0.27	0.30	0.31	0.31	0.28	0.24	0.21	0.17	0.14	0.11	3.39	0.00		
18	0.08	0.11	0.14	0.17	0.22	0.26	0.31	0.35	0.38	0.38	0.36	0.31	0.26	0.22	0.17	0.13	0.10	4.03	0.00		
15	0.06	0.08	0.12	0.16	0.22	0.33	0.49	0.75	1.11	1.45	1.55	1.34	0.98	0.66	0.44	0.30	0.21	10.4	5.62		
12	0.08	0.11	0.15	0.21	0.31	0.48	0.76	1.17	1.67	2.03	2.01	1.63	1.14	0.75	0.48	0.32	0.22	13.7	9.47		
9	0.12	0.17	0.24	0.34	0.53	0.83	1.33	2.03	2.64	2.73	2.23	1.50	0.92	0.57	0.36	0.24	0.17	17.1	12.9		
VERTICAL(DEG)	0.10	0.14	0.19	0.28	0.44	0.72	1.26	2.32	3.90	5.19	5.40	4.28	2.65	1.40	0.73	0.42	0.26	0.18	29.9	26.2	
	0.07	0.10	0.14	0.20	0.31	0.56	1.13	2.59	5.24	7.88	8.92	7.39	4.58	2.33	1.14	0.62	0.37	0.24	43.8	40.7	
	0.14	0.20	0.30	0.49	0.88	1.78	3.93	7.51	10.6	11.2	8.54	4.78	2.14	0.95	0.51	0.31	0.20	0.14	54.5	51.3	
	0.13	0.19	0.28	0.46	0.83	1.65	3.64	6.95	9.87	10.6	8.26	4.77	2.23	1.02	0.55	0.32	0.21	0.14	52.1	48.8	
	0.06	0.09	0.11	0.14	0.16	0.16	0.15	0.34	1.36	3.28	4.95	4.87	3.38	1.84	0.94	0.53	0.32	0.21	22.9	20.1	
	0.09	0.12	0.16	0.22	0.30	0.44	0.65	0.90	1.02	1.42	2.02	2.03	1.51	0.91	0.53	0.33	0.22	0.15	13.0	9.26	
	0.12	0.16	0.22	0.32	0.47	0.68	0.94	1.02	0.58	0.12	0.00	0.00	0.00	0.02	0.06	0.09	0.09	0.08	4.95	0.97	
	0.05	0.07	0.09	0.12	0.15	0.19	0.25	0.36	0.56	0.82	0.98	0.94	0.75	0.53	0.37	0.26	0.18	0.13	6.79	1.16	
	0.04	0.06	0.07	0.08	0.08	0.08	0.08	0.08	0.12	0.29	0.51	0.59	0.52	0.40	0.29	0.21	0.15	0.11	3.75	0.00	
	0.07	0.08	0.10	0.12	0.14	0.14	0.13	0.08	0.04	0.01	0.00	0.01	0.02	0.03	0.04	0.05	0.05	0.05	1.17	0.00	
-27	0.04	0.05	0.06	0.08	0.09	0.10	0.09	0.09	0.10	0.11	0.11	0.11	0.10	0.09	0.08	0.07	0.06	0.05	1.49	0.00	
	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)				6	9	12	15	18	21	24	27	
Φ t	1.39	1.90	2.61	3.68	5.49	8.85	15.7	27.2	39.8	48.2	46.6	35.2	21.8	12.2	7.12	4.55	3.10	2.20	288	---	
Φ a	0.00	0.00	0.00	0.00	0.90	3.50	11.5	23.8	37.0	45.8	44.3	32.7	17.8	7.23	2.05	0.00	0.00	0.00	---	227	


one-half-peak spread: U:5.0,D:5.0 , L:6.8,R:6.8,EMA Beam Type: Type 2 x 3 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.6V I:0.0829A P:5.264W PF:0.5268 Freq:50.00Hz Lamp Flux:302.863x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080008
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

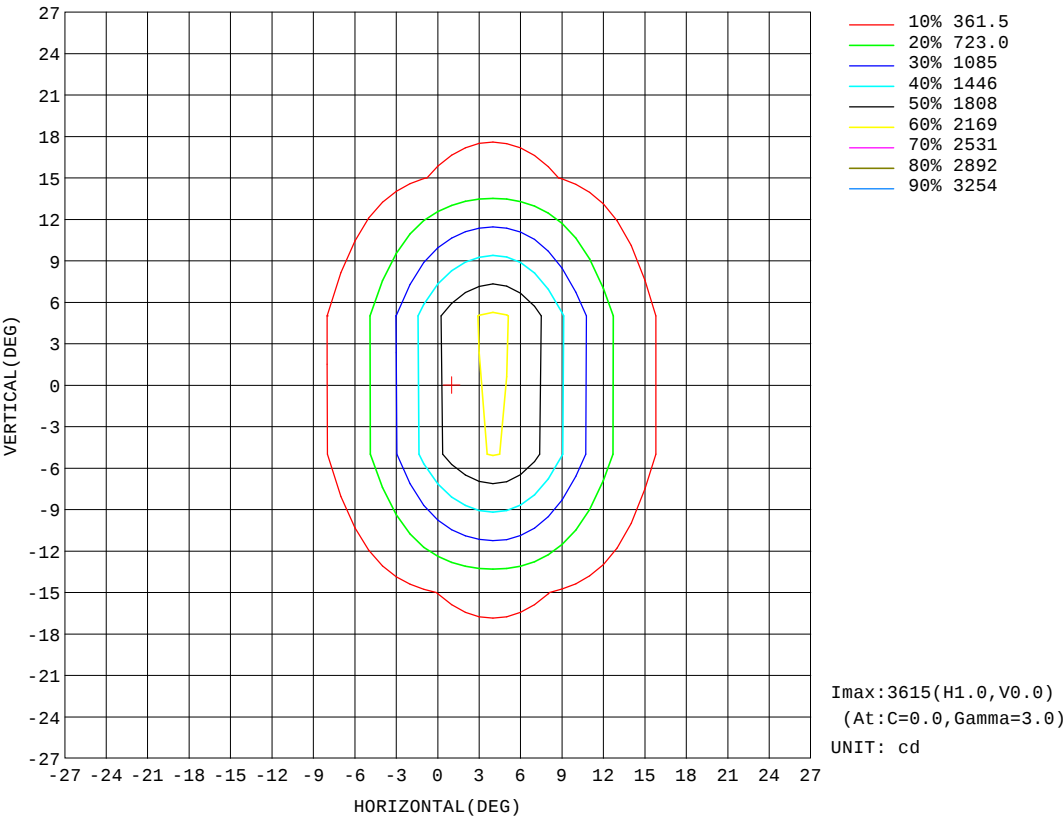


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:120.6V I:0.0829A P:5.264W PF:0.5268 Freq:50.00Hz Lamp Flux:302.863x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080008
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

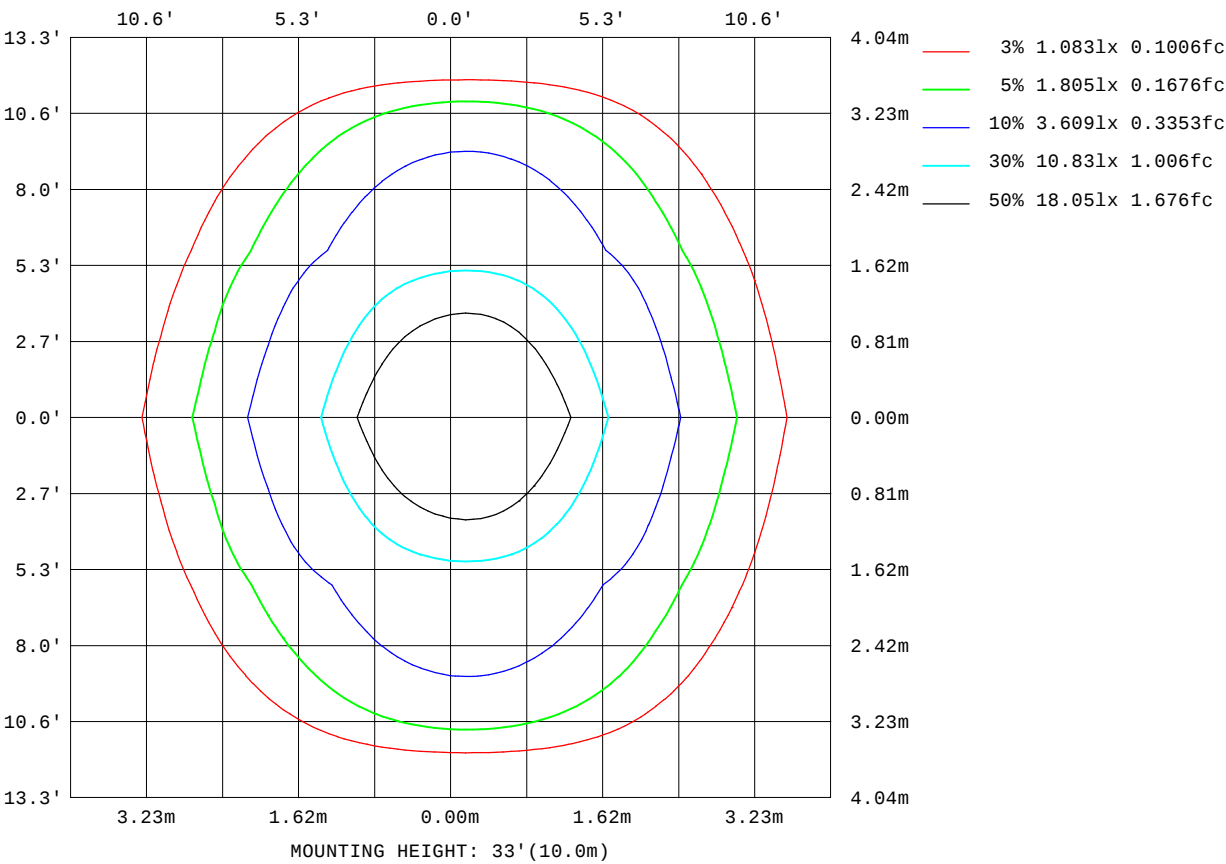

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

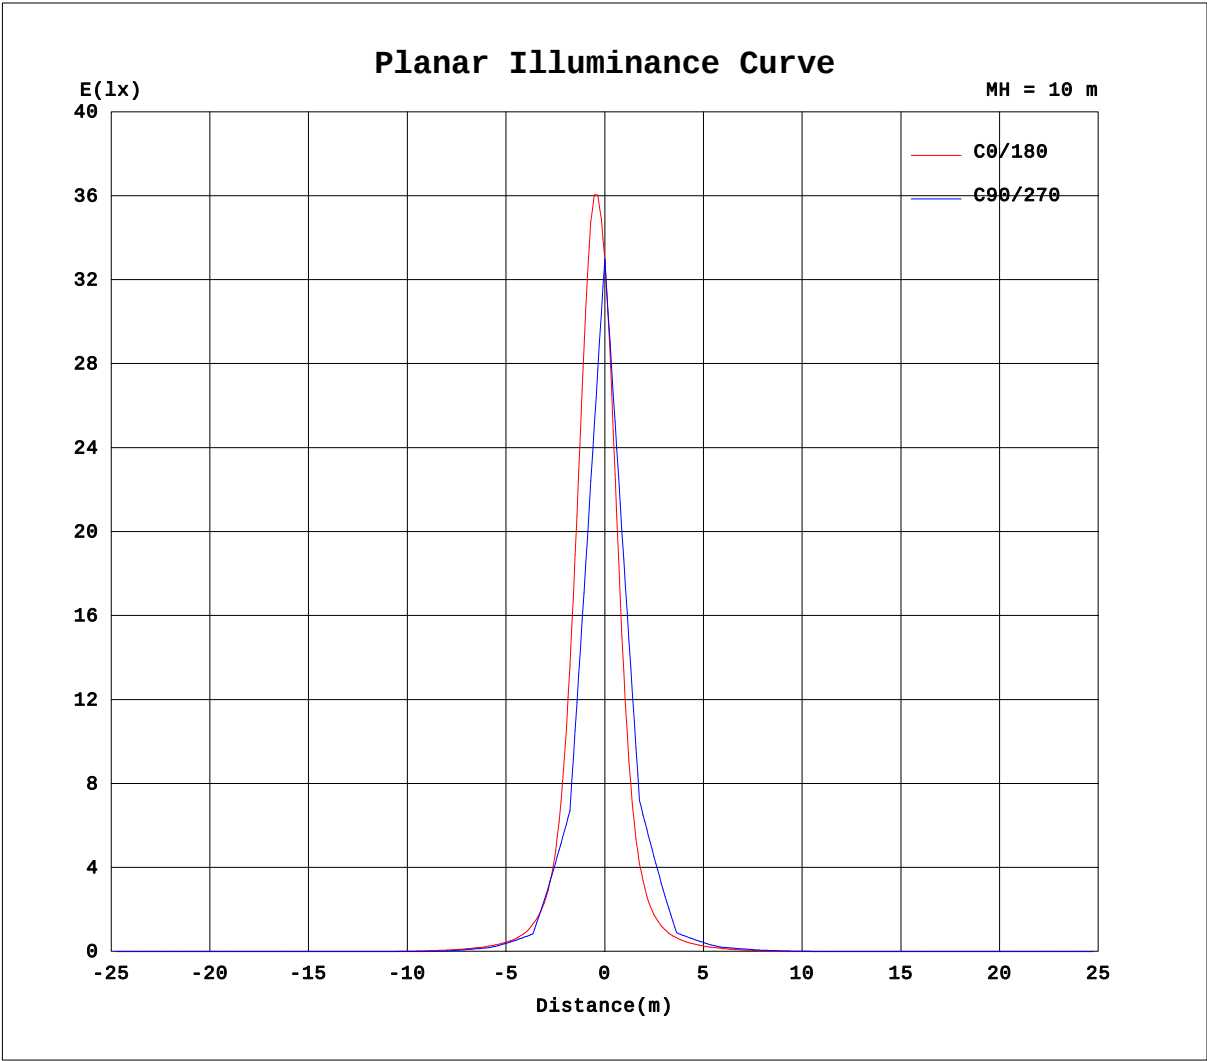


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.6V I:0.0829A P:5.264W PF:0.5268 Freq:50.00Hz Lamp Flux:302.863x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080008
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

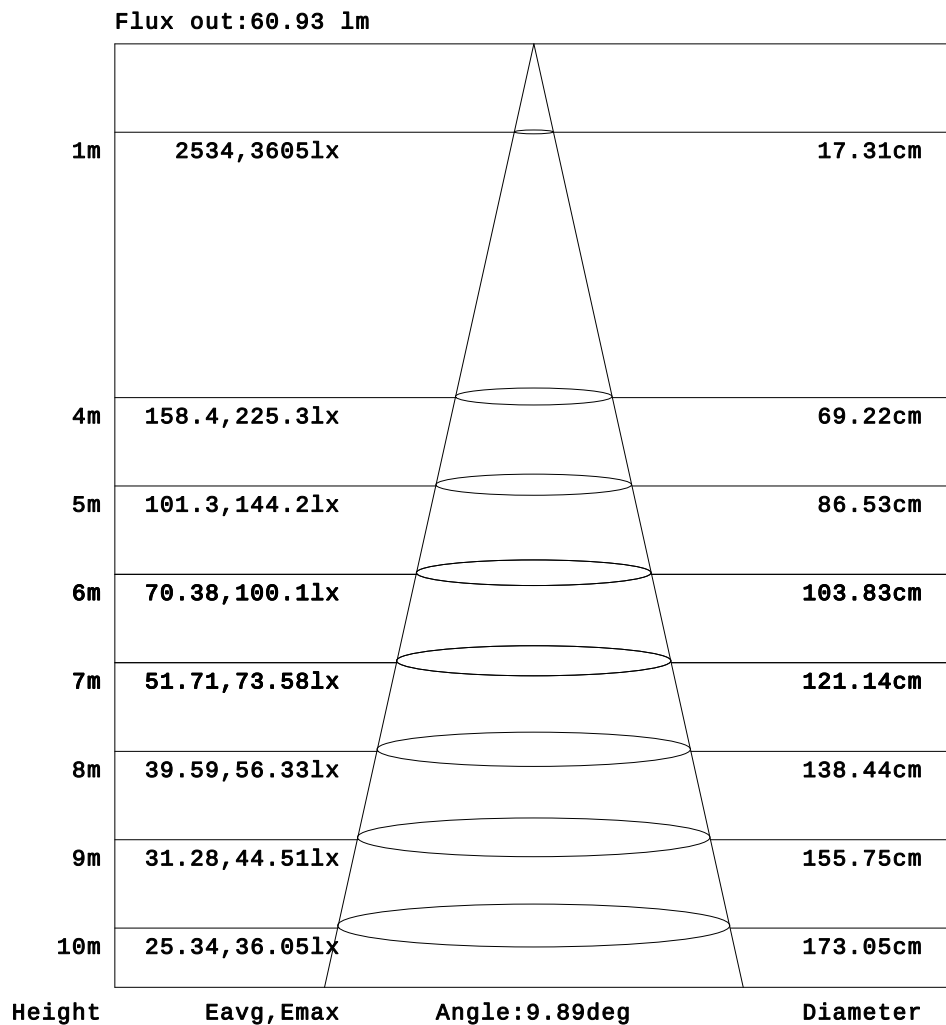

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.6V I:0.0829A P:5.264W PF:0.5268 Freq:50.00Hz Lamp Flux:302.863x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080008
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: cd			
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.15	1.11	1.80	2.32	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.52	3.09	4.34	4.93	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.52	3.05	5.75	8.73	12.4	15.4	17.6	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.12	9.23	14.9	20.4	25.5	29.5	31.5	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.18	6.69	13.8	21.9	31.2	42.4	54.7	64.8	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.06	9.10	17.5	27.8	39.4	54.8	74.1	93.1	104	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.03	7.11	16.0	27.1	43.1	68.0	117	212	364	
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	6.48	15.4	26.9	44.2	73.1	130	258	510	745	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.95	10.9	21.1	35.7	60.2	110	246	702	1745	
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.95	8.43	17.9	31.3	53.2	96.5	213	637	2085	3552	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.10	10.6	20.7	35.3	59.7	109	246	708	1765	
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.27	6.34	14.7	26.2	43.2	72.0	129	262	537	801	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.18	7.07	15.2	26.1	42.0	67.8	118	219	388	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.42	8.65	16.6	26.4	39.5	56.6	77.4	99.0	111	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.36	7.66	14.5	22.9	33.3	45.7	59.0	70.6	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.81	6.76	12.2	18.3	24.4	30.0	34.4	36.5	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.86	4.48	8.85	13.4	17.7	21.3	23.8	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.84	4.88	7.62	9.93	11.6	12.4	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	1.55	3.01	4.31	5.33	6.01	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.6V I:0.0829A P:5.264W PF:0.5268 Freq:50.00Hz Lamp Flux:302.863x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080008
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	2.53	2.42	1.98	1.29	0.43	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	5.01	4.39	3.17	1.61	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	18.4	17.6	15.5	12.4	8.94	5.95	3.52	1.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	31.2	28.5	24.2	19.1	14.0	8.94	4.25	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	68.1	62.2	50.9	38.8	28.1	19.5	12.3	6.19	1.87	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	99.8	82.8	62.9	45.0	31.5	21.1	12.8	6.14	0.49	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	425	304	167	92.5	55.4	35.2	22.1	12.8	5.62	0.72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	630	348	170	89.3	52.7	32.5	19.6	10.5	3.68	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	2153	1234	427	166	81.8	47.1	28.3	16.3	7.91	1.69	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	2733	994	298	122	63.7	36.9	21.7	11.5	4.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	2181	1245	428	166	82.2	46.9	27.9	15.9	7.56	1.44	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	668	354	170	90.2	52.9	31.8	18.7	9.63	3.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	456	317	170	93.8	55.9	34.5	21.0	11.7	4.82	0.47	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	106	86.7	65.4	46.1	30.9	19.7	11.4	5.04	0.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	73.9	66.8	54.2	41.0	28.8	19.1	11.5	5.54	1.43	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	35.7	32.3	27.0	20.8	14.5	8.87	4.12	0.17	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	24.5	23.1	20.1	16.1	11.5	7.02	3.45	1.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	12.1	10.7	8.57	5.92	3.07	0.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	6.19	5.80	4.96	3.78	2.39	0.97	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: