

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		10849.7 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	30.9V x 26.8H
	At 50% of Imax	10.0V x 13.4H
	At 90% of Imax	3.4V x 5.3H
Beam Flux	Total	981.2 lumens per klm.
	To 10% of Imax	652.1 lumens per klm.
	To 50% of Imax	279.6 lumens per klm.
	To 90% of Imax	28.9 lumens per klm.
Upward LOR		0.0 %
Downward LOR		98.1 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:277.5V I:0.1195A P:18.50W PF:0.5580 Freq:50.00Hz Lamp Flux:861.93x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080010
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

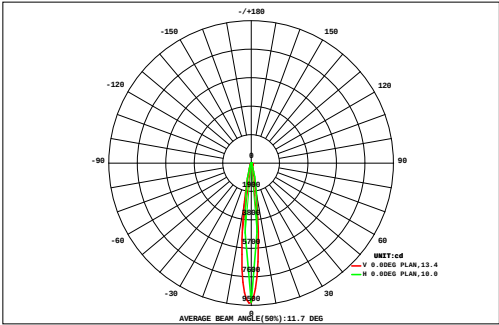

DATA OF LAMP		Eff:46.59lm/W	
MODEL SP-PZT-R110-3P-RDM	Imax(cd)	9352	
NOMINAL POWER(W)	18	AVAILABILITY(%)	69.6
RATED VOLTAGE(V)	277	Avai. FLUX(lm)	600.2
NOMINAL FLUX(lm)	861.93	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	861.9
TEST VOLTAGE(V)	277	θ @50%(H,V)	13,10DEG


		AREA FLUX DIAGRAM															UNIT:lm				Φ t	Φ a
VERTICAL (DEG)	27	0.18	0.21	0.25	0.29	0.32	0.36	0.40	0.44	0.46	0.47	0.47	0.45	0.42	0.38	0.33	0.29	0.25	0.21	6.18	0.00	
	24	0.17	0.21	0.26	0.31	0.37	0.44	0.51	0.59	0.67	0.71	0.73	0.70	0.65	0.57	0.50	0.42	0.35	0.30	8.46	0.00	
	21	0.23	0.28	0.34	0.41	0.49	0.59	0.69	0.78	0.85	0.88	0.86	0.79	0.70	0.61	0.51	0.42	0.35	0.29	10.1	0.00	
	18	0.29	0.35	0.43	0.52	0.63	0.75	0.87	0.98	1.05	1.05	0.99	0.88	0.75	0.63	0.52	0.42	0.34	0.28	11.7	0.00	
	15	0.24	0.30	0.38	0.49	0.66	0.93	1.35	2.03	2.99	3.89	4.17	3.61	2.64	1.77	1.20	0.84	0.60	0.45	28.5	16.3	
	12	0.27	0.35	0.47	0.63	0.89	1.33	2.04	3.15	4.49	5.45	5.40	4.38	3.05	2.00	1.32	0.90	0.64	0.48	37.2	25.7	
	9	0.39	0.52	0.70	0.98	1.46	2.25	3.55	5.41	7.07	7.33	5.97	3.99	2.44	1.54	1.01	0.69	0.51	0.38	46.2	34.9	
	6	0.33	0.43	0.58	0.81	1.22	1.93	3.36	6.24	10.4	13.8	14.1	11.2	6.96	3.72	1.98	1.15	0.75	0.52	79.4	69.7	
	3	0.26	0.32	0.43	0.60	0.90	1.51	3.03	7.00	13.9	20.9	23.0	19.2	12.0	6.17	3.07	1.67	1.02	0.68	116	107	
	0	0.42	0.58	0.85	1.34	2.33	4.74	10.6	20.0	27.9	28.6	22.1	12.5	5.72	2.61	1.38	0.85	0.58	0.42	144	135	
	-3	0.41	0.56	0.81	1.27	2.19	4.41	9.82	18.5	26.1	27.1	21.4	12.5	5.92	2.77	1.46	0.89	0.60	0.44	137	128	
	-6	0.24	0.29	0.36	0.44	0.51	0.45	0.38	0.93	3.61	9.02	12.8	12.6	8.79	4.84	2.53	1.42	0.89	0.61	60.7	53.4	
-9	0.30	0.38	0.49	0.63	0.82	1.16	1.68	2.31	2.70	3.99	5.29	5.28	3.92	2.41	1.44	0.90	0.62	0.45	34.8	24.3		
-12	0.37	0.49	0.65	0.89	1.25	1.79	2.37	2.52	1.50	0.32	0.00	0.00	0.00	0.05	0.19	0.29	0.30	0.26	13.3	2.44		
-15	0.20	0.25	0.31	0.38	0.46	0.57	0.73	0.97	1.47	2.18	2.65	2.52	1.99	1.42	1.01	0.72	0.53	0.41	18.8	3.40		
-18	0.18	0.21	0.25	0.28	0.29	0.27	0.26	0.24	0.33	0.81	1.42	1.62	1.42	1.08	0.80	0.61	0.46	0.36	10.9	0.00		
-21	0.24	0.28	0.33	0.38	0.43	0.45	0.42	0.29	0.13	0.06	0.03	0.04	0.07	0.12	0.18	0.21	0.21	0.19	4.05	0.00		
-24	0.17	0.20	0.24	0.28	0.31	0.33	0.32	0.29	0.31	0.33	0.34	0.34	0.32	0.29	0.25	0.24	0.23	0.20	4.98	0.00		
-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)				6	9	12	15	18	21	24	27		
Φ t	4.88	6.23	8.12	10.9	15.5	24.2	42.4	72.6	106	127	122	92.6	57.8	33.0	19.7	13.0	9.22	6.93	772	---		
Φ a	0.00	0.00	0.00	0.00	2.32	9.92	30.8	63.7	98.9	120	116	85.4	47.5	19.7	6.11	0.00	0.00	0.00	---	600		

one-half-peak spread: U:5.0,D:5.1 , L:7.0,R:6.0,EMA Beam Type: Type 2 x 3 (H x V)

H(β) Range:-90 - 90DEG	V(B) Range:-80 - 80DEG
H(β) Interval: 1.0DEG	V(B) Interval: 5.0DEG
Test Speed: HIGH	Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Temperature:28.0DEG	Humidity:83%
Operators:QC1	Test Distance:8.300m [K=1.0000]
Test Date:2025-08-01	Remarks:

ISOCANDELA DIAGRAM

Test:U:277.5V I:0.1195A P:18.50W PF:0.5580 Freq:50.00Hz Lamp Flux:861.93x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080010
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

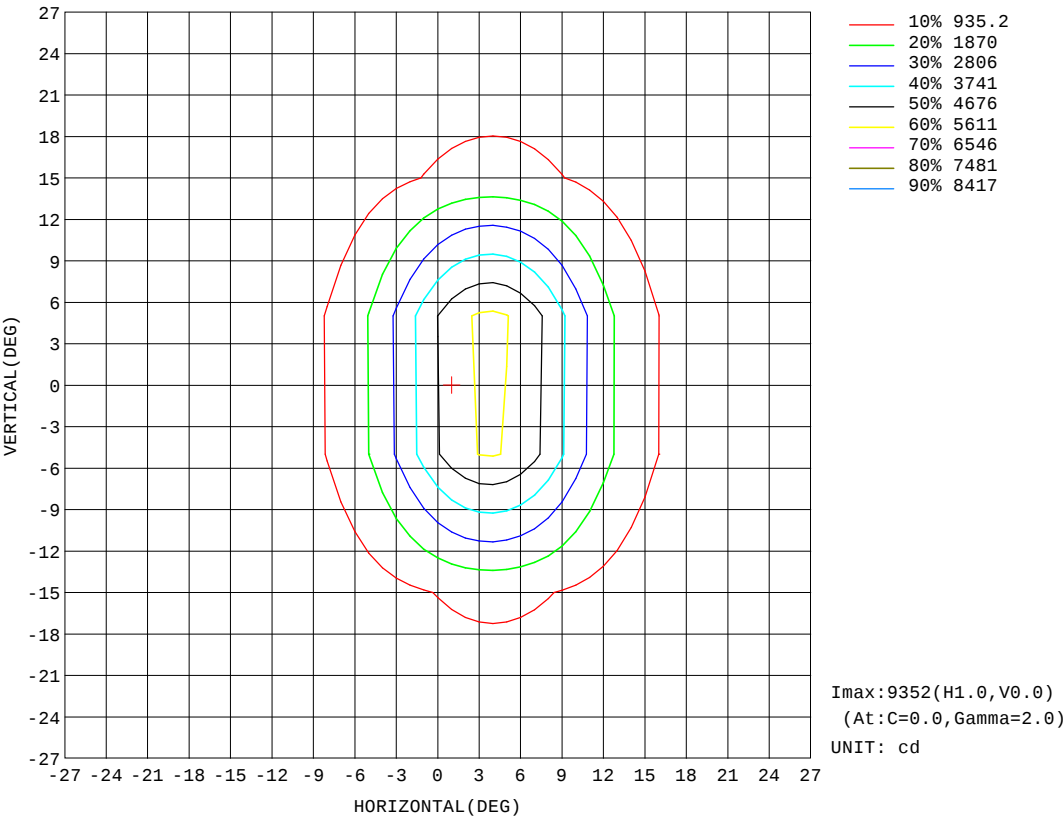


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:277.5V I:0.1195A P:18.50W PF:0.5580 Freq:50.00Hz Lamp Flux:861.93x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080010
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

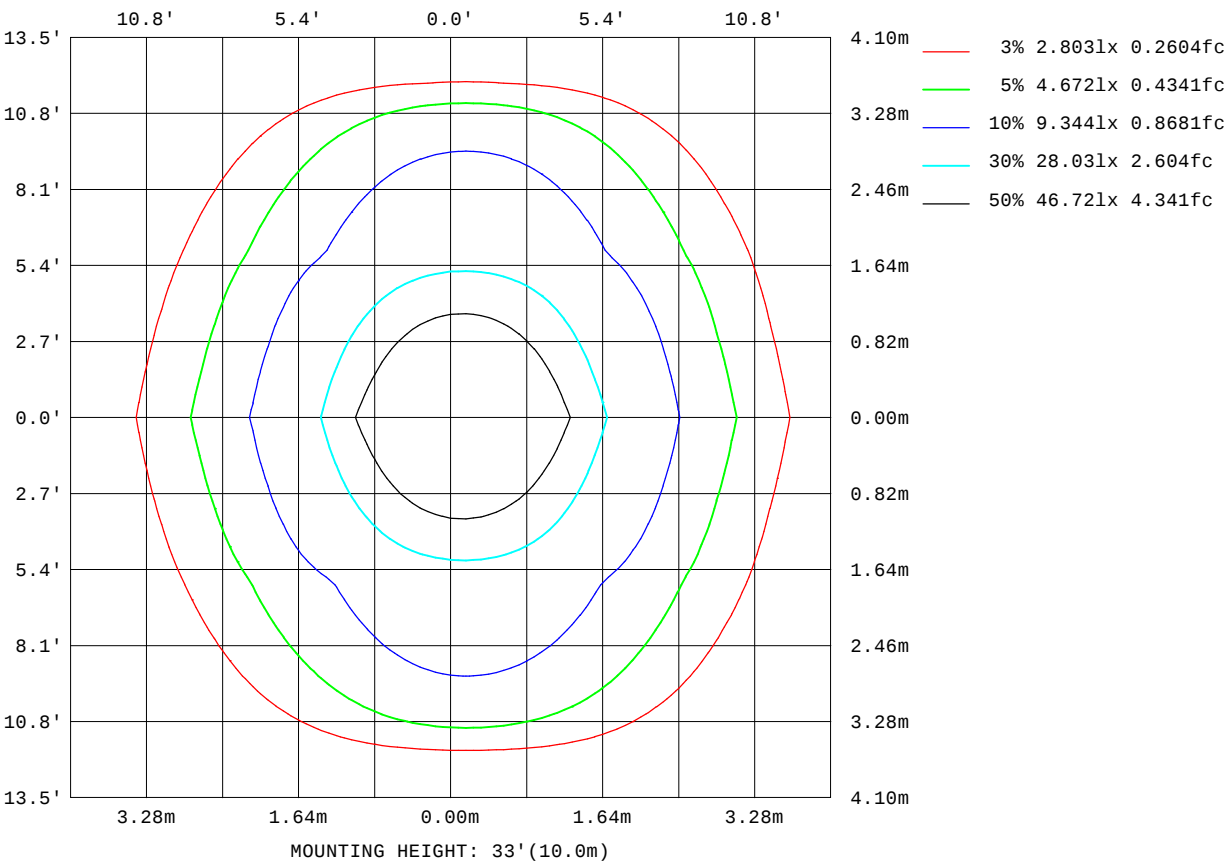

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

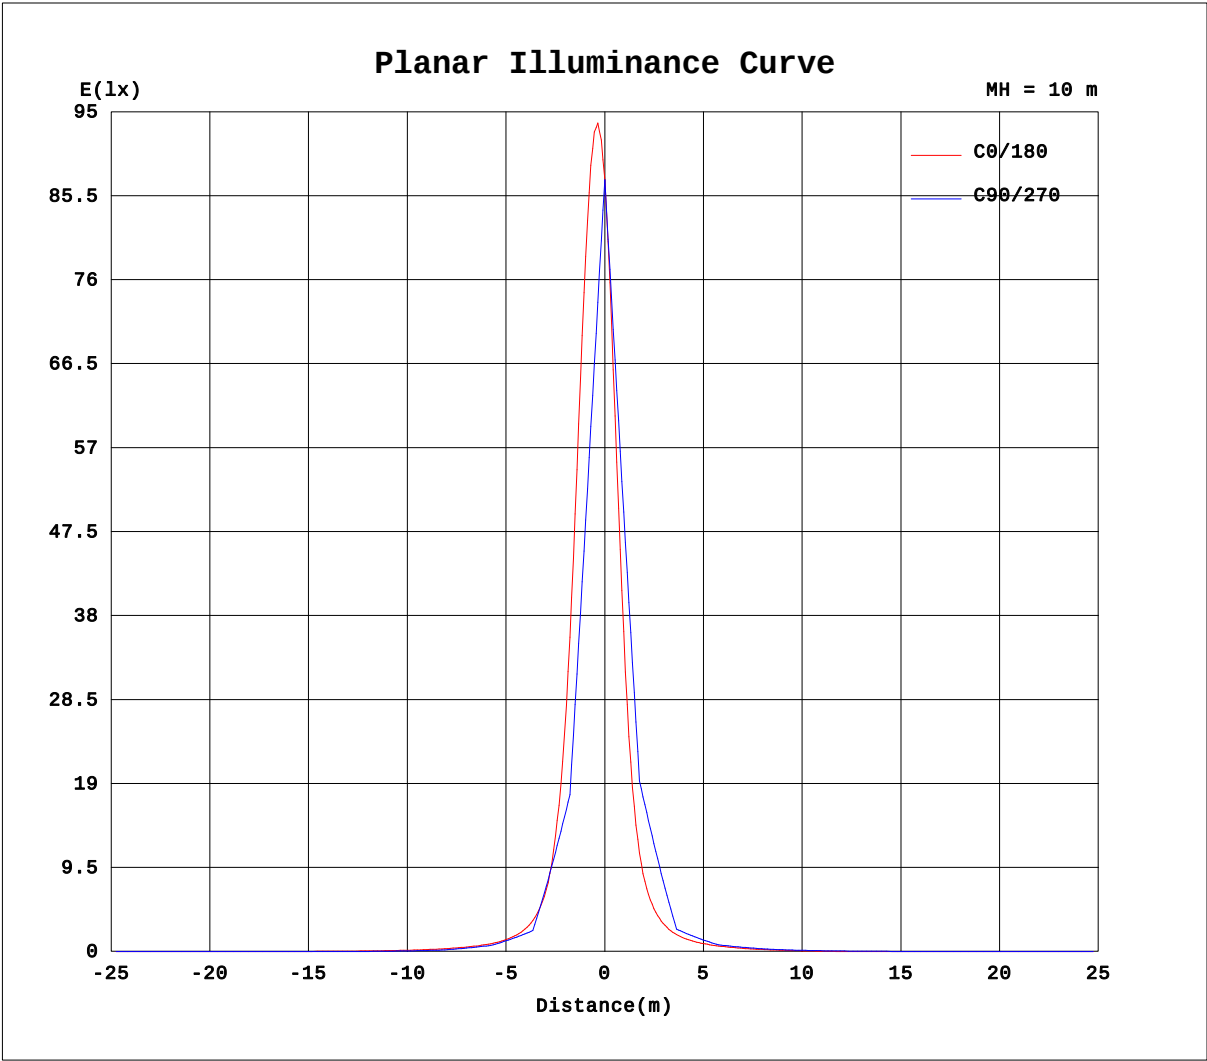


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:277.5V I:0.1195A P:18.50W PF:0.5580 Freq:50.00Hz Lamp Flux:861.93x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080010
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

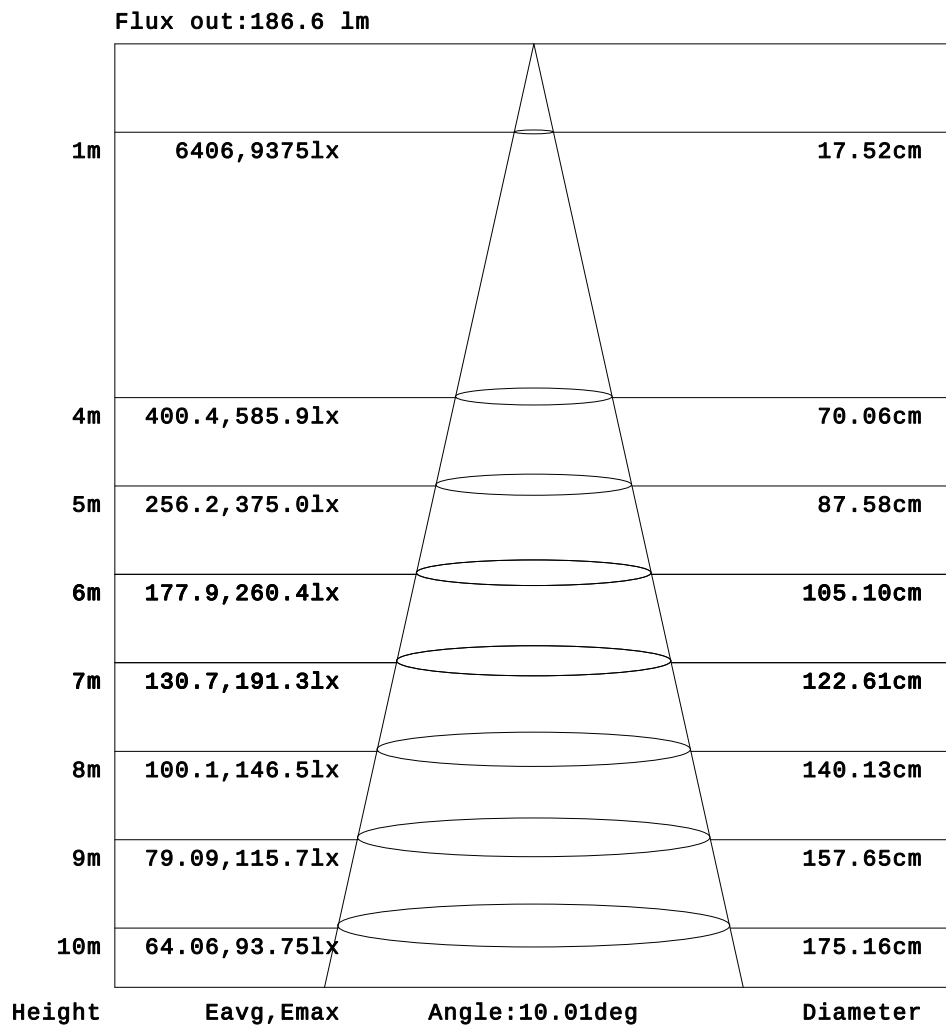

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.5V I:0.1195A P:18.50W PF:0.5580 Freq:50.00Hz Lamp Flux:861.93x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080010
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: cd		
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.15	4.48	5.73
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.01	7.45	10.6	12.6	13.2
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.42	3.58	7.97	11.1	16.3	21.0	23.8	25.9
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.22	12.8	19.8	26.0	31.0	34.9	37.9	39.3
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.68	8.81	18.0	28.5	39.9	51.1	60.7	68.3	73.8
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.31	11.4	24.3	35.9	50.1	67.9	82.8	96.0	106	111
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.93	12.3	28.6	44.6	61.8	84.0	110	139	170	195
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.40	12.6	31.3	52.4	73.1	98.8	130	170	219	266	294
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.03	9.98	27.8	48.1	70.3	97.9	139	204	325	564	965
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	7.96	28.1	47.5	69.8	98.6	142	218	363	680	1323	1977
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.90	18.2	39.1	59.0	84.7	121	184	315	654	1870	4613
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.35	15.5	34.4	53.4	77.2	111	166	277	584	1701	5569	9290
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.85	21.8	40.4	59.5	84.8	121	184	315	660	1899	4687
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.24	15.6	32.2	49.1	70.3	98.8	141	218	368	711	1435	2152
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	7.24	19.1	35.0	51.2	71.5	98.6	139	206	334	598	1048
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.66	12.5	25.2	39.6	55.4	74.8	99.0	131	174	228	282	313
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.29	13.5	25.4	38.3	52.7	69.4	89.8	115	146	180	209
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	6.99	15.3	26.8	38.0	50.2	63.2	77.3	91.9	106	116	122
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.03	6.65	14.4	24.1	34.1	43.8	54.1	64.5	74.7	83.6	89.6
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.67	6.69	13.5	22.2	29.8	36.6	43.5	49.6	54.9	58.8	60.8
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.58	4.62	10.5	17.3	23.7	29.4	34.5	39.0	42.5	44.8
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.35	7.05	12.8	17.6	21.6	25.0	27.5	29.2	29.9
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	2.05	4.66	7.44	11.1	14.7	17.4	19.3	20.4
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.57	5.08	7.78	9.70	10.9	11.5
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.50	3.14	4.31	5.13	5.60
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.5V I:0.1195A P:18.50W PF:0.5580 Freq:50.00Hz Lamp Flux:861.93x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080010
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	6.70	6.68	6.39	5.85	5.08	4.09	2.93	1.41	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	13.4	13.1	12.2	10.8	9.03	6.85	4.12	0.82	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	26.5	26.3	25.0	22.9	20.1	16.7	13.1	9.15	5.34	2.87	0.24	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	39.6	38.1	35.4	31.8	27.3	22.3	17.4	12.6	7.79	2.57	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	75.6	73.6	68.2	60.4	51.6	42.6	34.0	25.8	18.0	10.9	4.62	0.90	0.00	0.00	0.00	0.00	0.00	0.00
-30	110	103	91.9	78.6	65.0	52.3	40.7	29.5	19.5	11.5	4.60	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	203	188	159	128	100	78.5	60.5	45.5	32.8	22.0	13.3	4.82	0.02	0.00	0.00	0.00	0.00	0.00
-20	282	239	188	143	108	82.3	61.8	46.0	32.6	21.8	11.7	2.53	0.00	0.00	0.00	0.00	0.00	0.00
-15	1135	806	453	264	169	118	85.2	62.2	45.1	31.6	20.7	10.8	1.72	0.00	0.00	0.00	0.00	0.00
-10	1658	909	460	254	162	111	79.4	57.0	40.7	28.0	17.6	7.66	0.00	0.00	0.00	0.00	0.00	0.00
-5	5556	3233	1152	453	237	149	102	72.2	51.6	36.3	24.4	14.6	4.63	0.00	0.00	0.00	0.00	0.00
0	7108	2622	797	343	193	124	86.1	60.9	43.1	29.7	19.2	9.87	0.24	0.00	0.00	0.00	0.00	0.00
5	5643	3277	1160	456	239	150	102	72.4	51.8	36.4	24.8	15.3	6.08	0.00	0.00	0.00	0.00	0.00
10	1791	940	468	258	164	112	79.9	57.6	41.1	28.4	18.7	9.86	0.74	0.00	0.00	0.00	0.00	0.00
15	1231	857	466	270	172	119	86.2	63.0	45.9	32.5	22.3	13.7	5.27	0.00	0.00	0.00	0.00	0.00
20	298	250	196	147	111	83.7	62.9	46.9	33.9	23.8	15.5	7.58	0.01	0.00	0.00	0.00	0.00	0.00
25	217	199	167	134	105	81.5	63.0	48.1	35.8	25.9	17.7	10.3	2.74	0.00	0.00	0.00	0.00	0.00
30	120	112	99.2	84.6	69.7	56.1	44.5	34.0	25.3	17.9	10.9	4.11	0.00	0.00	0.00	0.00	0.00	0.00
35	91.4	88.3	81.4	72.1	61.6	51.1	41.5	32.8	24.9	18.0	11.7	5.50	0.61	0.00	0.00	0.00	0.00	0.00
40	60.4	57.5	52.9	47.2	40.8	34.2	27.8	21.8	16.0	10.5	4.99	0.01	0.00	0.00	0.00	0.00	0.00	0.00
45	45.4	44.4	41.9	38.3	34.0	29.3	24.3	19.3	14.4	9.54	4.72	1.37	0.00	0.00	0.00	0.00	0.00	0.00
50	29.7	28.6	26.8	24.4	21.6	18.3	14.7	10.9	6.90	2.79	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	20.7	20.4	19.3	17.7	15.6	13.3	10.5	7.44	4.66	2.63	0.56	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	11.5	10.9	9.96	8.60	6.94	4.95	2.65	0.20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	5.77	5.67	5.30	4.72	3.98	3.09	2.03	0.83	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: