

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		12202.7 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	31.2V x 26.9H
	At 50% of Imax	10.1V x 13.6H
	At 90% of Imax	3.4V x 5.5H
Beam Flux	Total	973.3 lumens per klm.
	To 10% of Imax	754.6 lumens per klm.
	To 50% of Imax	329.3 lumens per klm.
	To 90% of Imax	34.4 lumens per klm.
Upward LOR		0.0 %
Downward LOR		97.3 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:277.9V I:0.0418A P:5.557W PF:0.4790 Freq:49.99Hz Lamp Flux:179.48x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080019
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

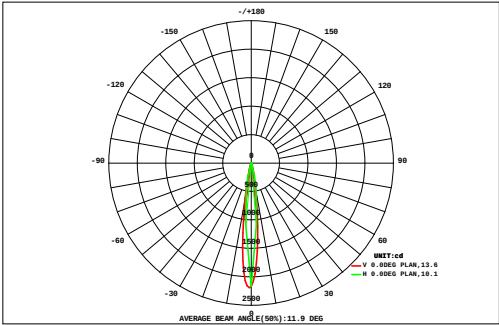

DATA OF LAMP		Eff:32.30lm/W	
MODE:SP-PZT-R110-3P-RDM-R		Imax(cd)	2190
NOMINAL POWER(W)	5	AVAILABILITY(%)	80.8
RATED VOLTAGE(V)	277	Avai. FLUX(lm)	145.1
NOMINAL FLUX(lm)	179.48	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	179.5
TEST VOLTAGE(V)	277	θ @50%(H,V)	14,10DEG


		AREA FLUX DIAGRAM															UNIT:lm			Φ t	Φ a
VERTICAL (DEG)	27	0.00	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.07	0.07	0.06	0.05	0.04	0.03	0.02	0.01	0.68	0.00	
	24	0.01	0.01	0.02	0.03	0.05	0.06	0.08	0.10	0.12	0.13	0.14	0.13	0.12	0.10	0.08	0.06	0.04	0.03	1.32	0.00
	21	0.01	0.03	0.04	0.06	0.08	0.10	0.13	0.15	0.17	0.18	0.17	0.15	0.13	0.11	0.08	0.06	0.04	0.03	1.72	0.00
	18	0.02	0.04	0.06	0.08	0.11	0.14	0.18	0.20	0.22	0.22	0.20	0.18	0.14	0.11	0.08	0.06	0.04	0.02	2.12	0.00
	15	0.02	0.03	0.05	0.08	0.12	0.19	0.31	0.49	0.73	0.97	1.05	0.92	0.65	0.41	0.26	0.16	0.10	0.07	6.62	4.15
	12	0.02	0.04	0.07	0.11	0.18	0.30	0.50	0.79	1.13	1.38	1.39	1.12	0.76	0.47	0.29	0.18	0.11	0.07	8.93	6.66
	9	0.05	0.08	0.13	0.20	0.32	0.55	0.91	1.37	1.80	1.90	1.56	1.02	0.59	0.35	0.20	0.13	0.08	0.05	11.3	9.07
		0.04	0.06	0.10	0.16	0.26	0.46	0.86	1.56	2.52	3.30	3.40	2.75	1.69	0.88	0.45	0.24	0.14	0.08	19.0	17.0
		0.02	0.04	0.06	0.10	0.18	0.34	0.77	1.73	3.27	4.83	5.44	4.68	2.93	1.47	0.72	0.37	0.20	0.12	27.3	25.5
		0.06	0.10	0.17	0.30	0.56	1.25	2.63	4.68	6.45	6.73	5.35	2.99	1.32	0.59	0.29	0.16	0.09	0.06	33.8	32.0
		0.06	0.10	0.16	0.28	0.53	1.16	2.43	4.34	6.03	6.37	5.16	2.98	1.36	0.62	0.31	0.17	0.10	0.06	32.2	30.3
		0.02	0.03	0.04	0.06	0.07	0.06	0.09	0.27	0.92	2.11	2.98	3.05	2.11	1.12	0.56	0.30	0.17	0.10	14.1	12.7
-9	0.03	0.05	0.07	0.11	0.17	0.26	0.40	0.58	0.69	0.98	1.24	1.25	0.91	0.53	0.29	0.17	0.10	0.06	7.90	5.93	
-12	0.05	0.07	0.11	0.17	0.27	0.40	0.56	0.64	0.43	0.11	0.00	0.00	0.00	0.00	0.01	0.02	0.03	0.02	2.90	0.76	
-15	0.01	0.02	0.03	0.05	0.07	0.09	0.13	0.20	0.34	0.52	0.62	0.59	0.44	0.30	0.19	0.13	0.08	0.05	3.86	0.87	
-18	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.06	0.16	0.31	0.37	0.30	0.22	0.15	0.10	0.07	0.04	1.96	0.00	
-21	0.02	0.03	0.04	0.05	0.06	0.07	0.06	0.03	0.01	0.00	0.00	0.00	0.00	0.01	0.01	0.01	0.01	0.00	0.39	0.00	
-24	0.01	0.01	0.02	0.02	0.03	0.04	0.03	0.04	0.05	0.05	0.05	0.05	0.05	0.04	0.03	0.02	0.02	0.01	0.56	0.00	
-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)				6	9	12	15	18	21	24	27	
Φ t	0.46	0.76	1.20	1.90	3.11	5.53	10.2	17.3	25.0	30.0	29.1	22.3	13.6	7.36	4.05	2.36	1.45	0.91	177	---	
Φ a	0.00	0.00	0.00	0.00	0.64	2.68	7.78	15.6	23.5	28.7	27.9	20.9	11.5	4.55	1.33	0.00	0.00	0.00	---	145	

one-half-peak spread: U:5.1,D:5.2 , L:7.1,R:6.6NEMA Beam Type: Type 2 x 3 (H x V)

H(β) Range:-90 - 90DEG	V(B) Range:-80 - 80DEG
H(β) Interval: 1.0DEG	V(B) Interval: 5.0DEG
Test Speed: HIGH	Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Temperature:28.0DEG	Humidity:83%
Operators:QC1	Test Distance:8.300m [K=1.0000]
Test Date:2025-08-01	Remarks:

ISOCANDELA DIAGRAM

Test:U:277.9V I:0.0418A P:5.557W PF:0.4790 Freq:49.99Hz Lamp Flux:179.48x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080019
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

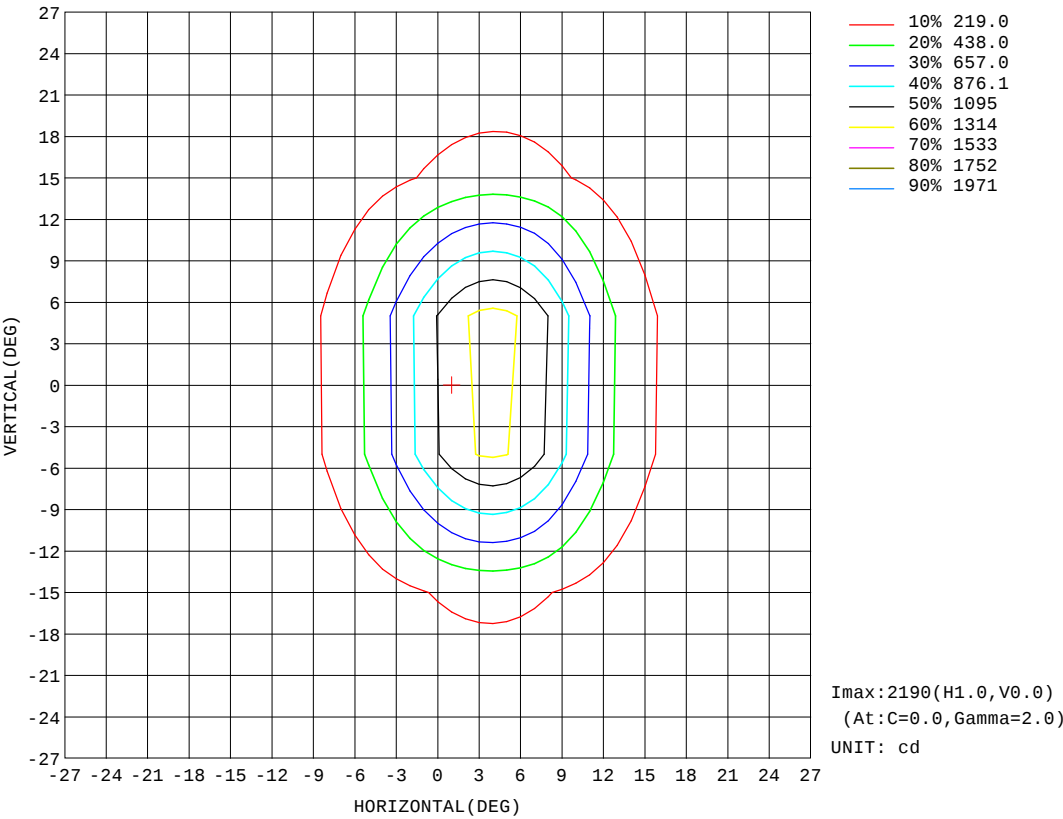


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:277.9V I:0.0418A P:5.557W PF:0.4790 Freq:49.99Hz Lamp Flux:179.48x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080019
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

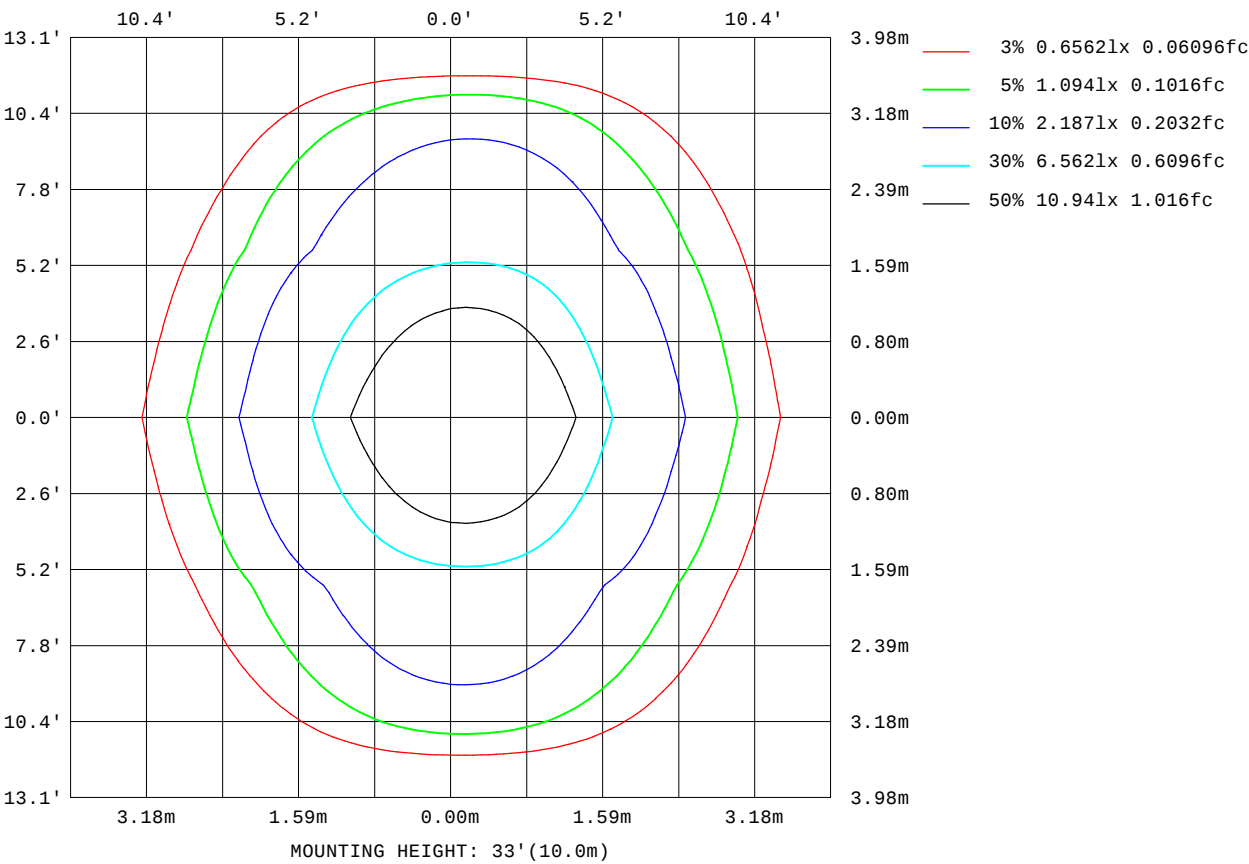

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

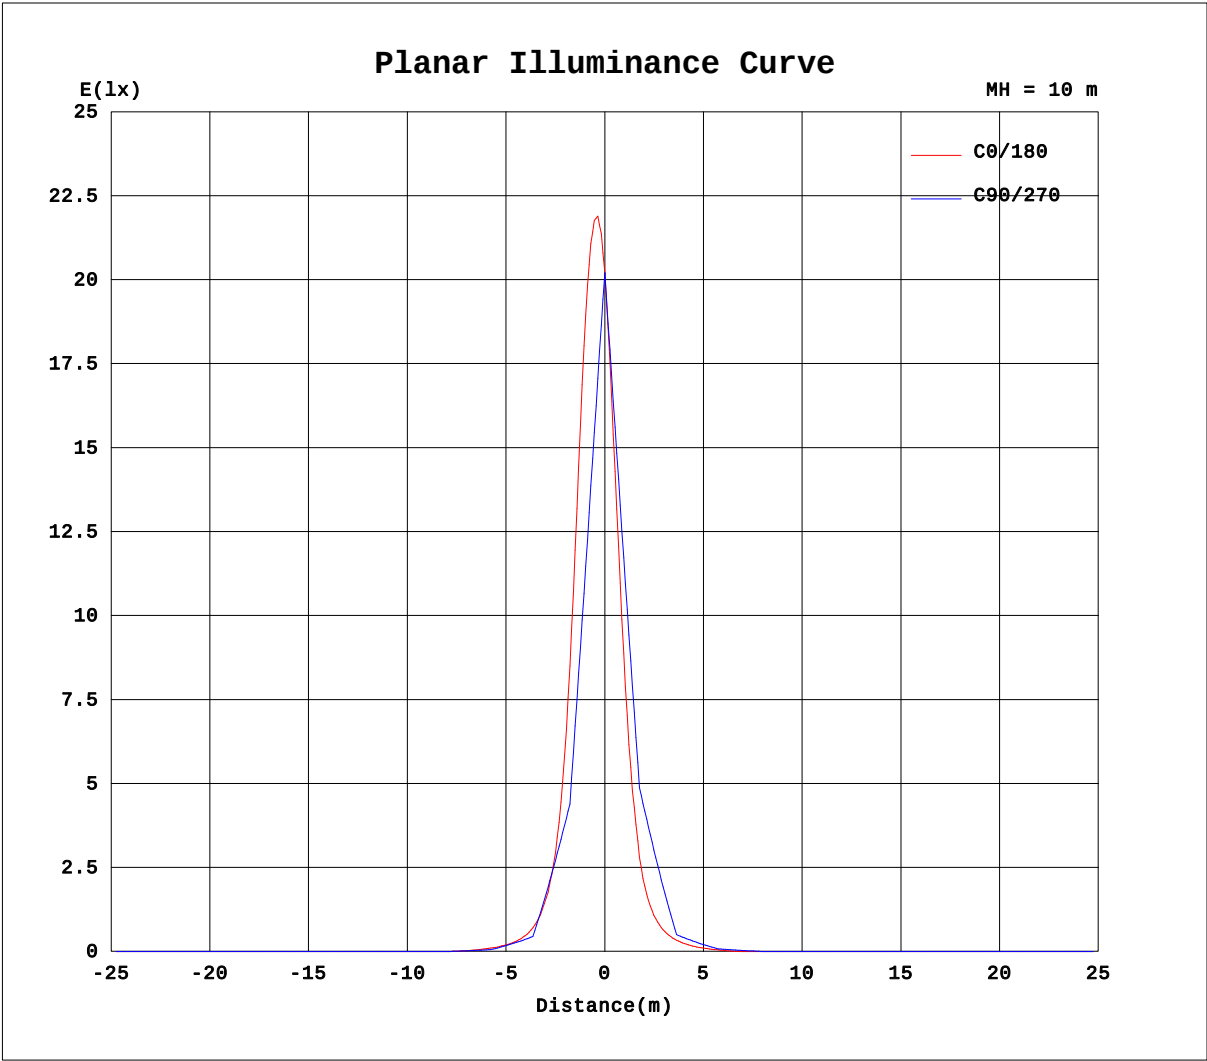


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:277.9V I:0.0418A P:5.557W PF:0.4790 Freq:49.99Hz Lamp Flux:179.48x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080019
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

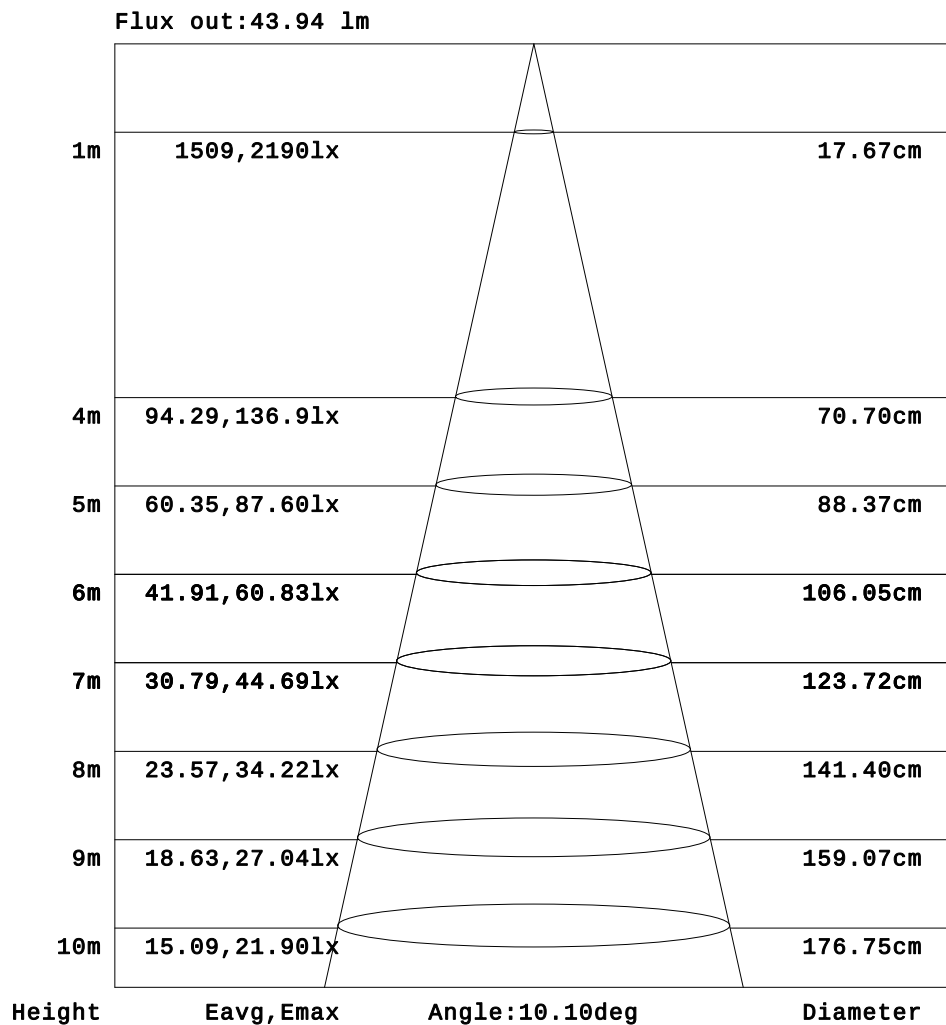

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.9V I:0.0418A P:5.557W PF:0.4790 Freq:49.99Hz Lamp Flux:179.48x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080019
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: cd			
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.85	2.41	3.65	4.60	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.41	3.64	6.39	8.56	9.73	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.83	4.89	10.1	17.4	25.0	31.1	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.59	7.11	14.6	25.0	37.3	49.7	55.5	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.66	7.33	16.7	32.9	63.9	128	233	
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.86	7.59	17.7	35.9	72.9	155	329	486	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.34	13.0	28.3	60.9	152	465	1084	
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.49	10.6	24.3	52.6	133	444	1325	2166	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.17	12.9	28.4	61.6	155	477	1104	
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.58	7.26	17.6	36.5	75.6	171	361	548	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.49	7.16	16.9	33.9	67.3	142	255	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.44	7.20	15.3	26.2	40.4	54.8	62.8	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.78	5.06	11.2	19.2	28.3	35.9	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.68	5.37	8.90	11.8	13.2	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.57	3.41	5.10	6.26	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.9V I:0.0418A P:5.557W PF:0.4790 Freq:49.99Hz Lamp Flux:179.48x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM-R	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080019
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	4.85	4.37	3.30	1.92	0.37	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	9.27	7.58	4.98	2.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	32.3	28.1	20.8	13.5	7.14	3.16	0.30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	51.4	40.1	27.7	17.0	8.97	2.70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	269	180	90.8	45.1	23.0	11.1	3.40	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	399	201	91.2	43.0	21.4	9.52	2.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	1319	775	258	91.7	39.3	18.4	7.35	0.55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	1722	620	182	65.1	28.8	12.6	3.59	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	1354	801	268	94.9	40.5	18.9	7.50	0.57	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	463	230	101	46.6	22.9	10.1	2.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	308	210	103	49.7	25.1	12.0	3.83	0.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	58.8	45.8	31.2	19.1	10.1	3.39	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	38.0	33.3	24.8	16.2	8.94	3.59	0.58	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	12.9	11.0	7.84	4.18	0.52	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	6.64	6.14	4.93	3.20	1.35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: