

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		11887.4 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	30.7V x 26.6H
	At 50% of Imax	10.0V x 13.1H
	At 90% of Imax	3.4V x 5.2H
Beam Flux	Total	977.4 lumens per klm.
	To 10% of Imax	698.0 lumens per klm.
	To 50% of Imax	300.4 lumens per klm.
	To 90% of Imax	30.3 lumens per klm.
Upward LOR		0.0 %
Downward LOR		97.7 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:277.9V I:0.0463A P:6.310W PF:0.4910 Freq:50.00Hz Lamp Flux:303.077x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080022
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

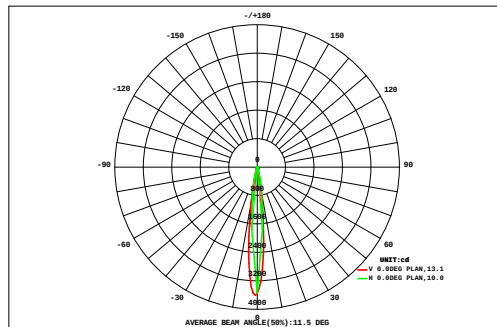

DATA OF LAMP		Eff:48.03lm/W	
MODE:SP-PZT-R110-3P-RDM-W		Imax(cd)	3603
NOMINAL POWER(W)	6	AVAILABILITY(%)	74.9
RATED VOLTAGE(V)	277	Avai. FLUX(lm)	227.1
NOMINAL FLUX(lm)	303.077	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	303.1
TEST VOLTAGE(V)	277	θ @50%(H,V)	13,10DEG

		AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
		0.04	0.06	0.07	0.08	0.10	0.11	0.13	0.14	0.15	0.16	0.15	0.13	0.12	0.10	0.08	0.06	0.05	1.89	0.00			
VERTICAL (DEG)	27	0.04	0.05	0.07	0.09	0.11	0.14	0.17	0.21	0.23	0.25	0.26	0.25	0.23	0.20	0.17	0.14	0.11	0.09	2.80	0.00		
	24	0.06	0.08	0.10	0.13	0.16	0.20	0.24	0.28	0.31	0.32	0.31	0.28	0.25	0.21	0.17	0.14	0.11	0.08	3.45	0.00		
	21	0.09	0.11	0.14	0.18	0.22	0.27	0.32	0.36	0.39	0.39	0.36	0.32	0.27	0.22	0.17	0.13	0.10	0.08	4.09	0.00		
	18	0.06	0.09	0.12	0.16	0.23	0.33	0.50	0.77	1.14	1.48	1.58	1.37	1.00	0.67	0.44	0.30	0.21	0.15	10.6	6.18		
	15	0.08	0.11	0.15	0.21	0.32	0.49	0.77	1.20	1.71	2.07	2.05	1.67	1.16	0.76	0.49	0.33	0.22	0.16	13.9	9.79		
	12	0.12	0.17	0.24	0.35	0.54	0.85	1.37	2.08	2.70	2.79	2.28	1.52	0.93	0.57	0.37	0.24	0.17	0.12	17.4	13.3		
	9	0.10	0.14	0.19	0.28	0.44	0.72	1.27	2.34	3.93	5.23	5.41	4.28	2.65	1.40	0.73	0.42	0.27	0.18	30.0	26.4		
	6	0.07	0.10	0.14	0.20	0.31	0.56	1.12	2.57	5.24	7.91	8.89	7.37	4.57	2.33	1.14	0.63	0.37	0.24	43.8	40.7		
	3	0.14	0.20	0.30	0.49	0.88	1.78	3.91	7.51	10.6	11.1	8.48	4.74	2.13	0.96	0.52	0.31	0.20	0.14	54.4	51.1		
	0	0.13	0.19	0.28	0.46	0.83	1.65	3.62	6.95	9.88	10.5	8.19	4.73	2.21	1.02	0.55	0.32	0.21	0.14	51.9	48.6		
-9	0.06	0.08	0.11	0.14	0.16	0.16	0.15	0.33	1.35	3.30	4.92	4.83	3.35	1.82	0.93	0.53	0.32	0.21	22.8	20.0			
	-6	0.09	0.12	0.16	0.21	0.30	0.44	0.65	0.89	1.01	1.41	1.99	2.01	1.49	0.90	0.52	0.33	0.22	0.15	12.9	9.18		
	-3	0.11	0.16	0.22	0.31	0.47	0.68	0.93	1.01	0.56	0.10	0.00	0.00	0.00	0.02	0.06	0.09	0.09	0.08	4.88	0.96		
	0	0.05	0.07	0.09	0.12	0.15	0.19	0.25	0.36	0.56	0.81	0.97	0.93	0.74	0.52	0.36	0.25	0.18	0.13	6.73	0.93		
	3	0.04	0.05	0.07	0.08	0.08	0.08	0.08	0.08	0.12	0.30	0.51	0.58	0.51	0.39	0.28	0.21	0.15	0.11	3.73	0.00		
	6	0.06	0.08	0.11	0.13	0.14	0.15	0.13	0.08	0.04	0.01	0.00	0.01	0.02	0.03	0.04	0.05	0.05	0.04	1.18	0.00		
-24	0.04	0.05	0.07	0.08	0.10	0.10	0.10	0.09	0.10	0.11	0.11	0.11	0.10	0.09	0.08	0.07	0.06	0.05	1.50	0.00			
	-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL (DEG)				6	9	12	15	18	21	24	27		
Φ t		1.38	1.90	2.62	3.71	5.53	8.91	15.7	27.2	40.0	48.3	46.5	35.1	21.7	12.2	7.13	4.55	3.10	2.19	288	---		
Φ a		0.00	0.00	0.00	0.00	0.90	3.73	11.5	24.0	37.3	45.9	44.1	32.5	18.0	7.19	2.04	0.00	0.00	0.00	---	227		


one-half-peak spread: U:5.0,D:5.1 , L:6.8,R:6.6 MEMA Beam Type: Type 2 x 3 (H x V)

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:277.9V I:0.0463A P:6.310W PF:0.4910 Freq:50.00Hz Lamp Flux:303.077x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080022
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

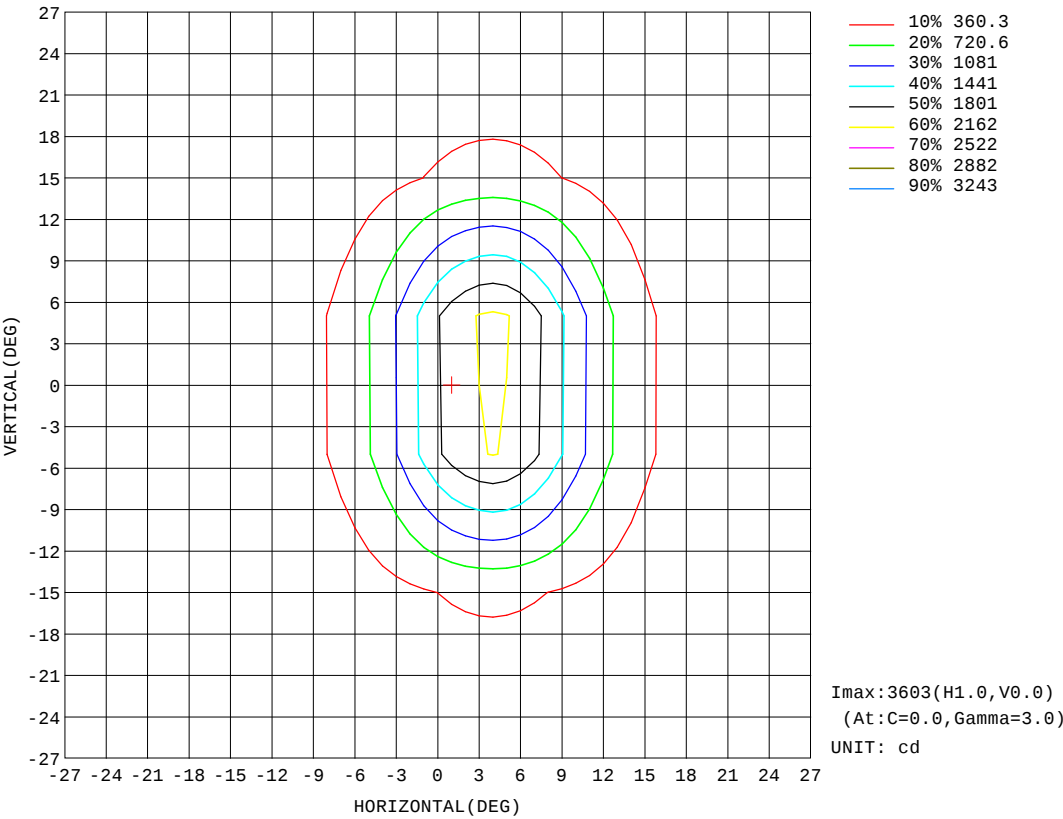


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:277.9V I:0.0463A P:6.310W PF:0.4910 Freq:50.00Hz Lamp Flux:303.077x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080022
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

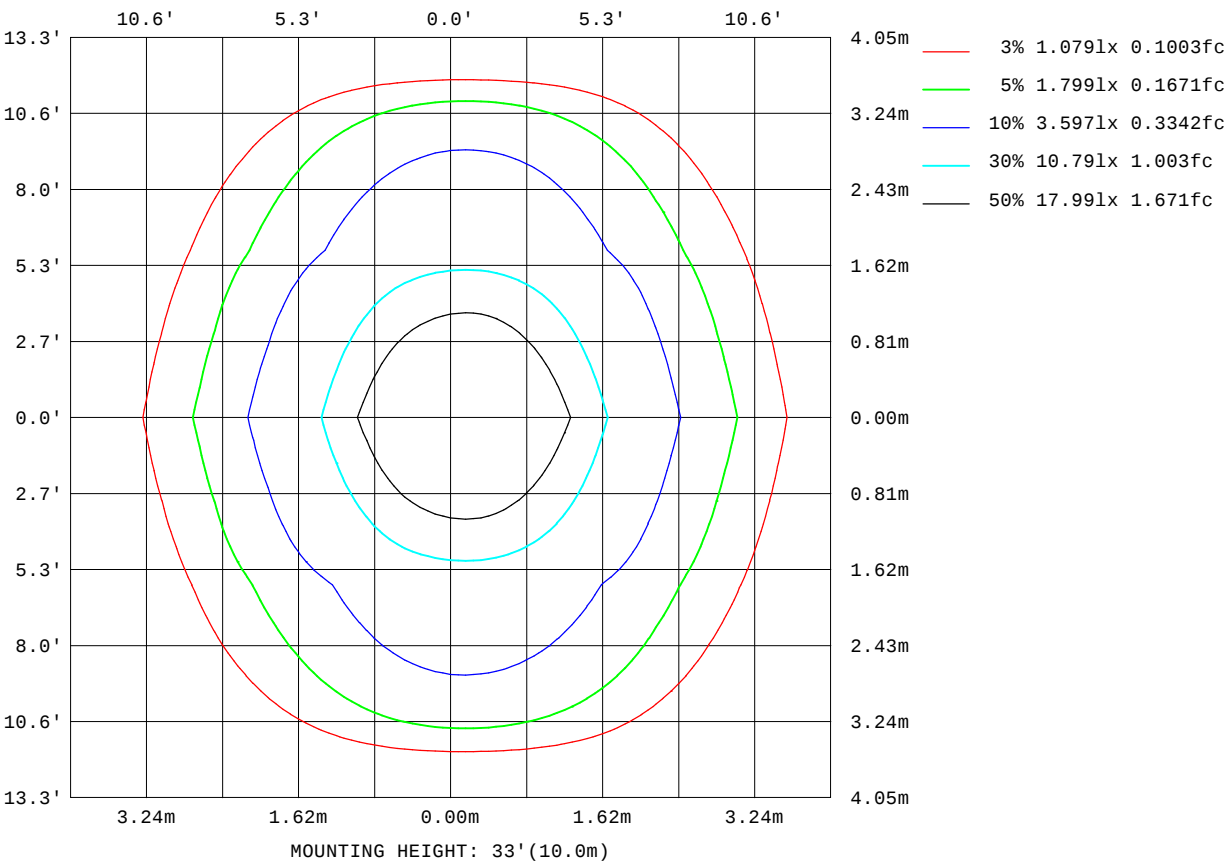

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

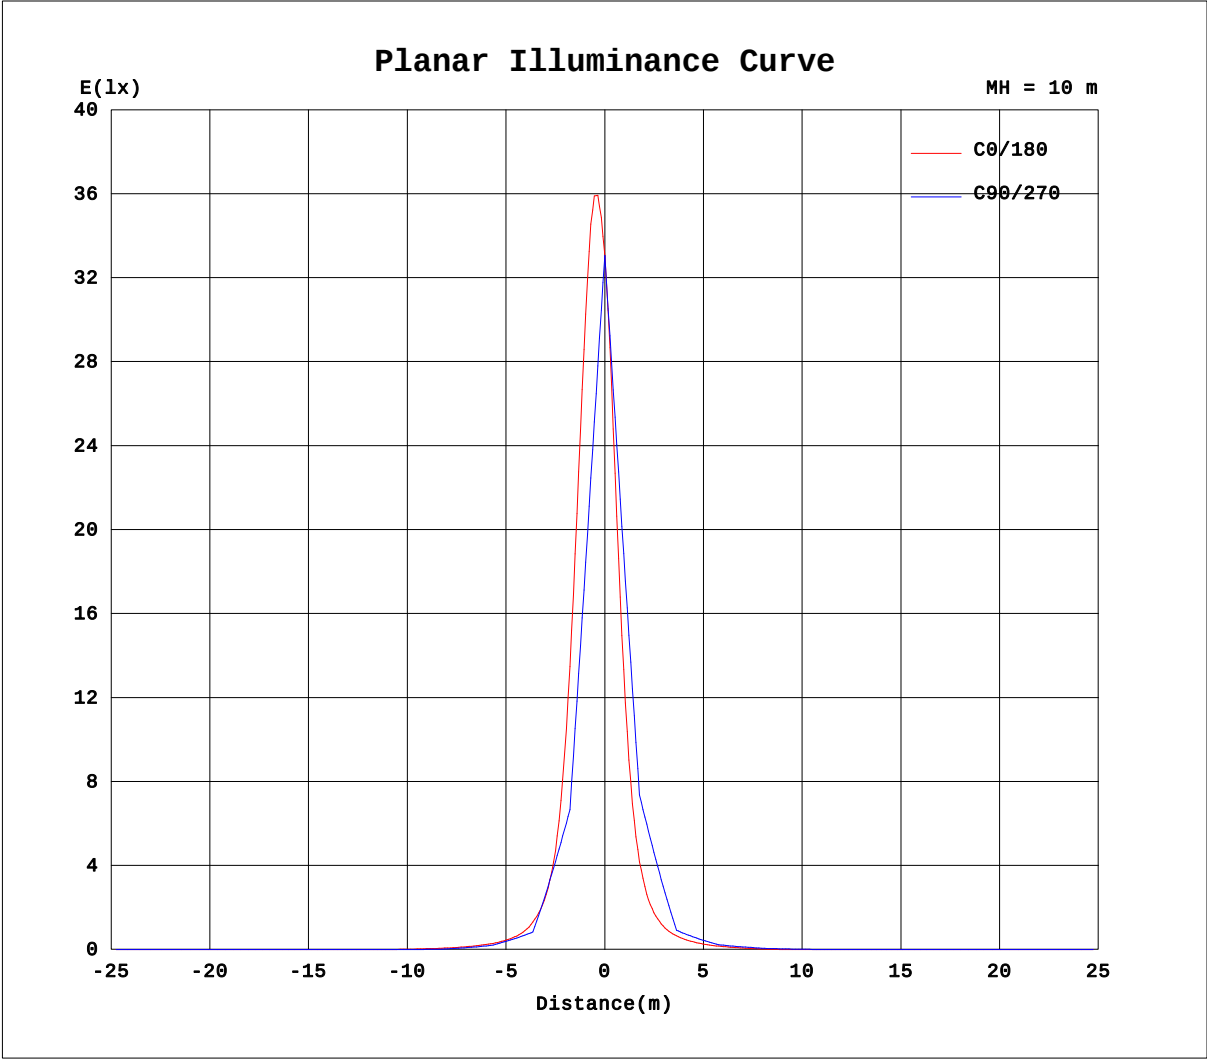


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:277.9V I:0.0463A P:6.310W PF:0.4910 Freq:50.00Hz Lamp Flux:303.077x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080022
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

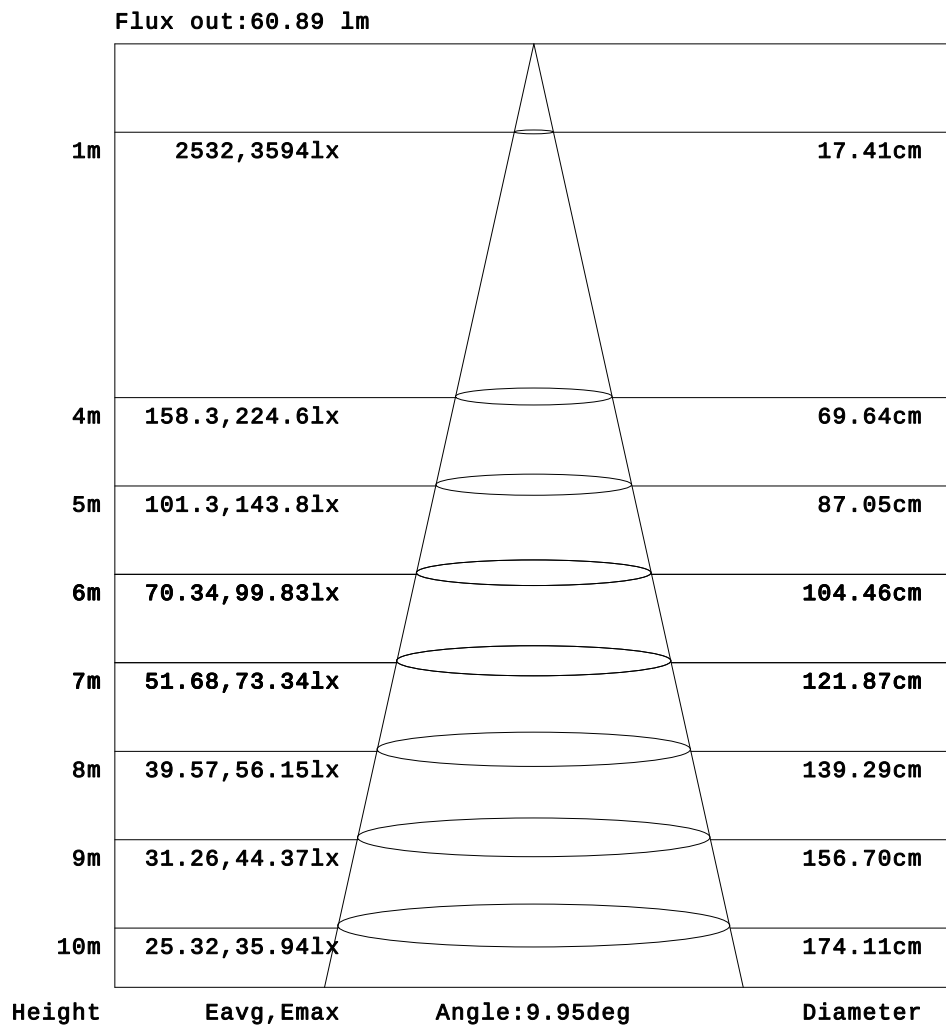

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.9V I:0.0463A P:6.310W PF:0.4910 Freq:50.00Hz Lamp Flux:303.077x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080022
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: cd			
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.39	1.30	1.94	2.32	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	1.90	3.45	4.39	4.75	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.00	4.03	7.07	10.0	13.1	15.8	17.6	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	5.69	11.7	17.3	22.0	26.1	29.7	31.3	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.31	6.98	14.4	23.0	32.9	43.7	55.2	64.7	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.06	8.85	17.1	27.0	40.3	56.6	75.2	93.4	103	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.10	7.02	15.4	26.4	42.2	68.2	117	212	362	
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.12	6.36	14.7	26.2	43.1	72.1	129	257	507	737	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.86	10.4	20.5	35.1	59.5	109	246	700	1748	
0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.00	7.94	17.5	30.9	53.0	96.3	213	637	2078	3545	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.94	10.4	20.5	35.1	59.7	110	247	710	1779	
10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.28	6.35	14.7	26.1	43.3	72.5	131	267	551	819	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.25	7.39	15.5	26.5	42.6	68.7	120	225	397	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.03	9.30	17.3	27.5	40.4	57.6	79.3	101	114	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	2.83	8.50	15.5	24.0	34.3	46.7	60.6	71.9	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.82	7.77	13.3	19.3	25.3	30.8	34.9	36.7	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.14	2.38	5.36	9.76	14.2	18.4	21.8	23.9	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.66	5.53	8.19	10.4	11.7	12.1	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.42	1.92	3.31	4.57	5.52	5.99	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:277.9V I:0.0463A P:6.310W PF:0.4910 Freq:50.00Hz Lamp Flux:303.077x1 lm		
NAME: 8.03.036.0004 10° SP-PZT-R110-3P-RDM-W	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080022
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(DEG) V(DEG)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	2.36	2.12	1.52	0.70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	4.56	3.57	2.12	0.29	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	18.0	16.8	14.4	11.1	7.65	4.83	2.19	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	30.4	27.4	22.8	17.5	11.9	6.39	1.55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	67.2	61.1	49.9	37.7	26.8	17.8	10.4	4.49	1.26	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-20	98.5	81.9	62.1	44.3	30.5	19.9	11.7	5.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	419	299	165	91.7	54.9	34.6	21.6	12.3	4.96	0.44	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-10	619	343	168	89.1	52.6	32.5	19.8	10.5	3.33	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-5	2139	1227	423	167	81.8	47.2	28.6	16.7	8.09	1.48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
0	2720	989	300	123	63.9	37.3	22.1	12.0	4.56	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
5	2180	1247	427	168	82.3	47.1	28.3	16.4	8.01	1.72	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
10	682	359	172	90.3	52.8	32.1	19.2	10.1	3.58	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
15	465	323	172	94.2	55.8	34.6	21.4	12.2	5.29	0.68	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
20	107	87.8	65.6	45.8	31.0	20.1	11.8	5.51	0.46	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
25	74.8	67.4	54.5	40.6	28.5	19.1	11.8	5.89	1.67	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
30	35.7	32.1	26.5	20.2	14.3	8.96	4.32	0.32	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	24.3	22.8	19.7	15.4	11.0	6.83	3.52	1.31	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
40	11.5	10.1	7.84	5.32	2.69	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	6.00	5.52	4.62	3.42	2.14	0.80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-01

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: