

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		5067.5 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	44.9V x 41.8H
	At 50% of Imax	22.7V x 21.6H
	At 90% of Imax	6.5V x 8.3H
Beam Flux	Total	995.5 lumens per klm.
	To 10% of Imax	815.8 lumens per klm.
	To 50% of Imax	411.8 lumens per klm.
	To 90% of Imax	48.3 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.5 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.4V I:0.2531A P:18.32W PF:0.6009 Freq:50.00Hz Lamp Flux:870.627x1 lm		
NAME: SP-PZT-R110-3P-RDM-3	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080055
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

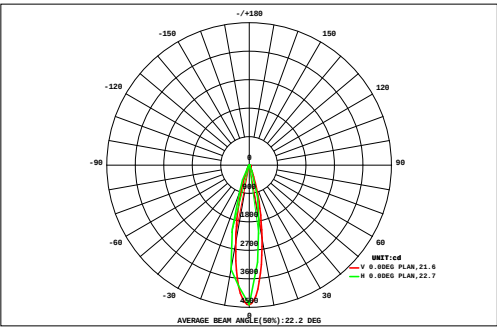

DATA OF LAMP		Eff:47.53lm/W	
MODE	SP-PZT-R110-3P-RDM-3	Imax(cd)	4412
NOMINAL POWER(W)	18	AVAILABILITY(%)	83.9
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	730.2
NOMINAL FLUX(lm)	870.627	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	870.6
TEST VOLTAGE(V)	120	θ @50%(H,V)	22,23DEG


AREA FLUX DIAGRAM																	UNIT:lm		Φ t	Φ a
27	0.16	0.19	0.24	0.30	0.39	0.50	0.62	0.74	0.81	0.82	0.78	0.69	0.57	0.46	0.35	0.27	0.21	0.17	8.25	2.35
24	0.18	0.23	0.32	0.47	0.70	1.01	1.36	1.68	1.89	1.94	1.85	1.61	1.30	0.97	0.67	0.46	0.31	0.23	17.2	11.5
21	0.21	0.29	0.42	0.65	0.99	1.43	1.90	2.31	2.53	2.55	2.37	2.02	1.59	1.14	0.76	0.50	0.34	0.24	22.3	17.2
18	0.25	0.36	0.53	0.83	1.29	1.86	2.46	2.95	3.17	3.16	2.89	2.42	1.86	1.31	0.85	0.54	0.36	0.25	27.3	22.9
15	0.26	0.42	0.72	1.23	2.03	3.09	4.36	5.60	6.51	6.83	6.46	5.51	4.23	3.01	1.98	1.21	0.70	0.40	54.6	51.1
12	0.31	0.53	0.95	1.65	2.72	4.11	5.77	7.36	8.50	8.83	8.24	6.93	5.24	3.69	2.39	1.43	0.81	0.45	69.9	67.0
9	0.41	0.74	1.36	2.36	3.82	5.65	7.74	9.56	10.7	10.8	9.68	7.84	5.71	3.91	2.44	1.42	0.76	0.42	85.3	82.6
6	0.36	0.64	1.20	2.14	3.52	5.29	7.39	9.45	10.9	11.3	10.5	8.70	6.50	4.53	2.89	1.71	0.94	0.51	88.5	85.9
3	0.31	0.51	1.00	1.83	3.08	4.75	6.81	9.09	11.0	11.7	11.2	9.52	7.27	5.16	3.36	2.02	1.13	0.60	90.3	87.9
0	0.43	0.80	1.54	2.71	4.31	6.33	8.69	11.0	12.4	12.4	11.1	8.78	6.40	4.34	2.67	1.54	0.81	0.45	96.7	94.2
-3	0.41	0.75	1.42	2.51	3.99	5.84	8.01	10.1	11.4	11.4	10.3	8.15	5.96	4.05	2.51	1.46	0.77	0.44	89.5	87.0
-6	0.23	0.35	0.60	1.08	1.82	2.78	3.95	5.23	6.29	6.78	6.60	5.81	4.57	3.29	2.19	1.36	0.79	0.45	54.2	51.0
-9	0.24	0.35	0.57	0.98	1.55	2.26	3.10	3.87	4.41	4.58	4.37	3.85	3.02	2.15	1.43	0.90	0.54	0.34	38.5	34.8
-12	0.25	0.38	0.57	0.93	1.36	1.84	2.36	2.61	2.56	2.37	2.09	1.78	1.38	0.91	0.61	0.39	0.27	0.21	22.9	17.9
-15	0.16	0.22	0.32	0.48	0.74	1.07	1.46	1.88	2.18	2.31	2.23	1.99	1.62	1.21	0.84	0.57	0.37	0.25	19.9	14.6
-18	0.13	0.16	0.19	0.23	0.33	0.45	0.60	0.81	0.98	1.10	1.11	1.03	0.89	0.71	0.53	0.39	0.28	0.21	10.1	2.22
-21	0.13	0.15	0.15	0.14	0.12	0.11	0.09	0.09	0.09	0.09	0.08	0.06	0.05	0.05	0.06	0.08	0.11	0.12	1.79	0.00
-24	0.10	0.12	0.12	0.13	0.15	0.19	0.23	0.27	0.30	0.31	0.31	0.28	0.24	0.20	0.16	0.13	0.12	0.11	3.46	0.00
-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)	6	9	12	15	18	21	24	27			
Φ t	4.54	7.19	12.2	20.6	32.9	48.5	66.9	84.6	96.6	99.3	92.1	77.0	58.4	41.1	26.7	16.4	9.63	5.85	801	---
Φ a	0.00	0.13	5.28	14.7	29.2	45.6	65.0	83.2	95.4	98.0	90.8	75.6	56.4	36.9	21.5	11.6	0.98	0.00	---	730

one-half-peak spread: U:8.2,D:14.7 , L:10.6,R:11.2 NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-07
V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.4V I:0.2531A P:18.32W PF:0.6009 Freq:50.00Hz Lamp Flux:870.627x1 lm		
NAME: SP-PZT-R110-3P-RDM-3	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080055
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

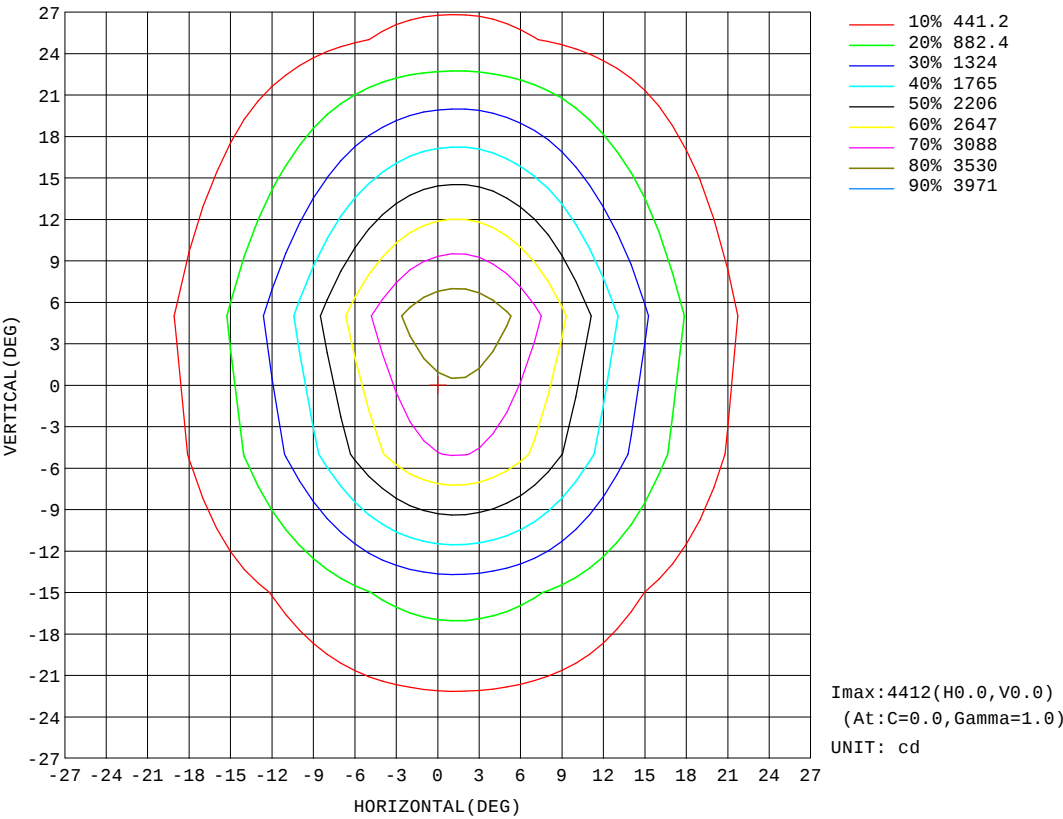


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:120.4V I:0.2531A P:18.32W PF:0.6009 Freq:50.00Hz Lamp Flux:870.627x1 lm		
NAME: SP-PZT-R110-3P-RDM-3	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080055
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

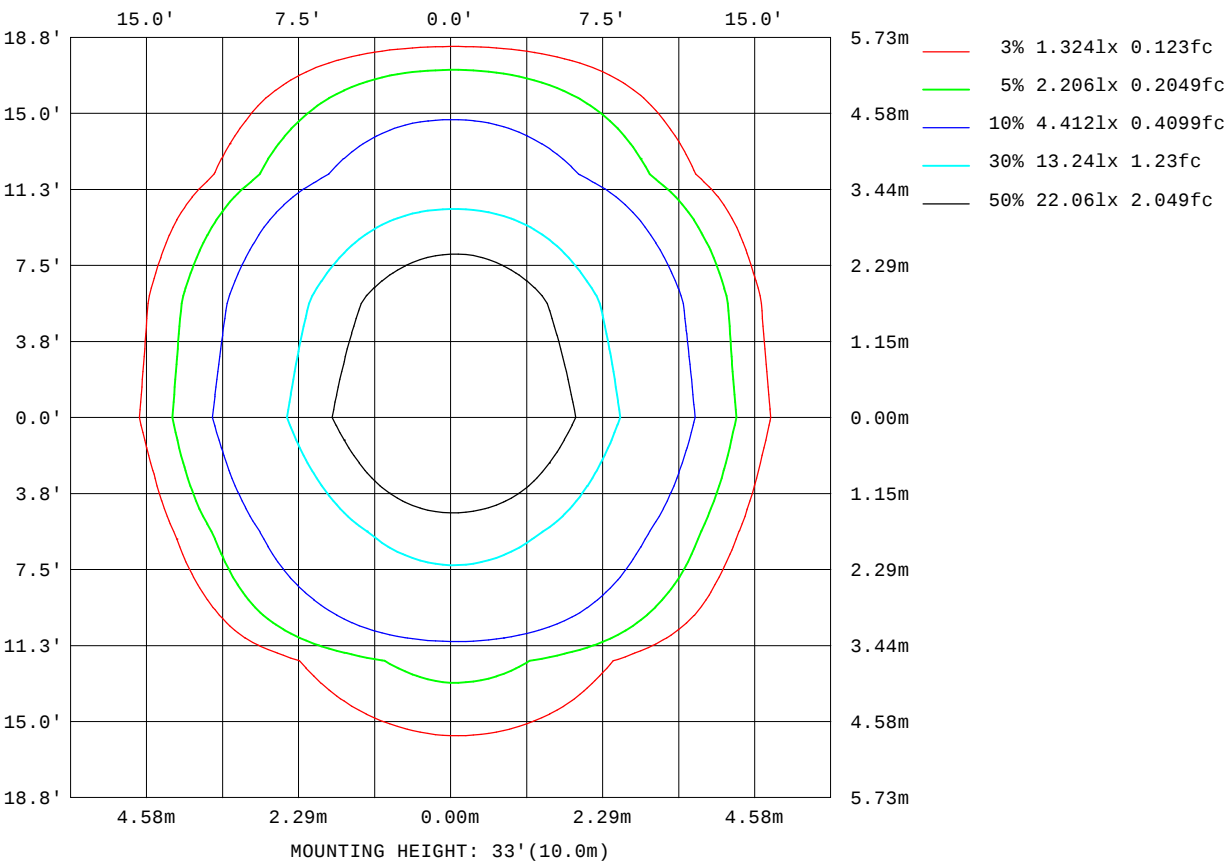

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

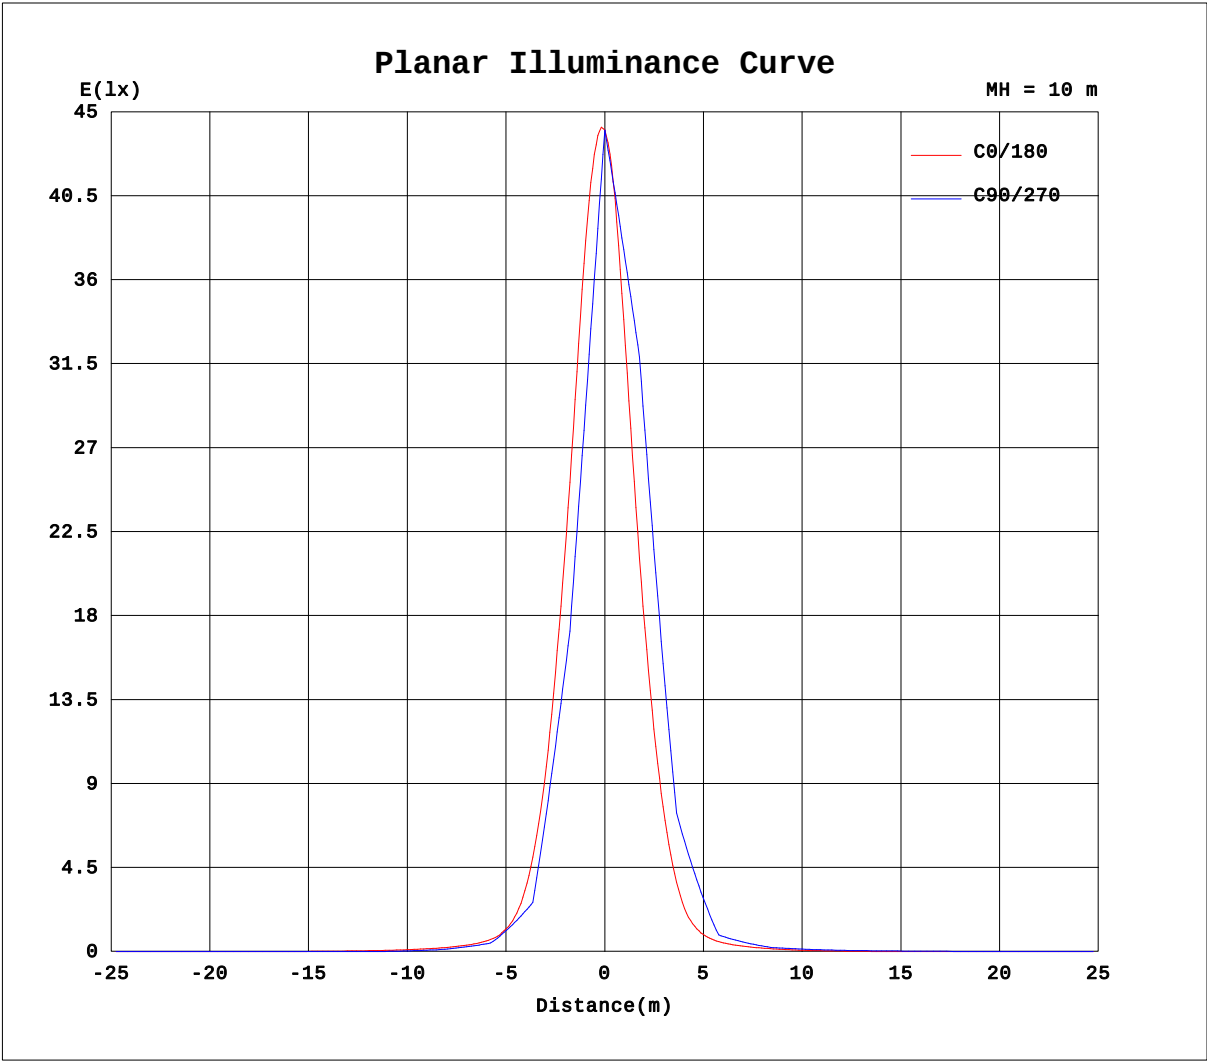


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.4V I:0.2531A P:18.32W PF:0.6009 Freq:50.00Hz Lamp Flux:870.627x1 lm		
NAME: SP-PZT-R110-3P-RDM-3	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080055
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

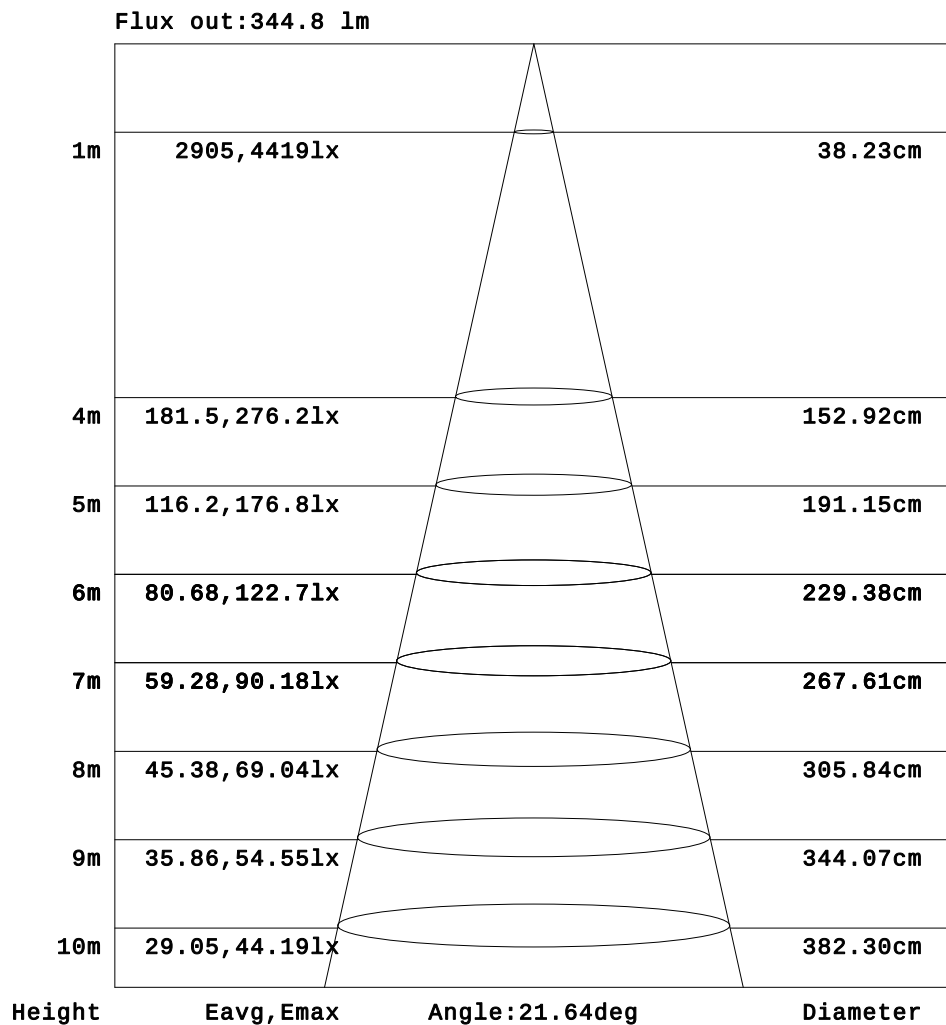

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.4V I:0.2531A P:18.32W PF:0.6009 Freq:50.00Hz Lamp Flux:870.627x1 lm		
NAME: SP-PZT-R110-3P-RDM-3	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080055
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: cd			
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.71	3.67	5.50	7.32	8.96	10.4	11.4	12.2	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.32	4.21	8.11	11.7	15.3	18.5	21.3	23.2	24.6	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.04	2.25	4.65	9.04	14.0	19.4	25.8	33.0	39.6	44.6	47.8	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.66	5.44	10.3	15.8	22.0	29.5	39.0	50.3	60.3	67.6	71.7	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	2.64	7.78	13.5	20.5	30.4	42.9	59.5	85.7	123	165	194	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.94	6.30	12.3	19.3	28.7	43.4	62.1	88.5	134	203	277	320	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.56	7.23	13.7	22.1	34.2	51.5	80.0	147	306	561	873	1052	
-10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.11	10.6	18.0	29.0	45.8	68.6	115	249	569	1041	1572	1801	
-5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.01	10.7	18.9	30.5	47.0	71.4	127	310	763	1509	2459	3079	
0	0.00	0.00	0.00	0.00	0.00	0.00	0.30	6.46	13.7	23.6	37.8	56.3	88.5	181	498	1213	2339	3690	4412	
5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.35	12.6	22.3	35.0	51.5	77.7	143	369	919	1857	3047	3840	
10	0.00	0.00	0.00	0.00	0.00	0.00	0.49	6.96	14.8	25.6	38.0	54.9	82.8	157	397	944	1832	2836	3344	
15	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.17	12.7	22.6	33.3	46.9	67.1	108	234	532	1063	1709	2102	
20	0.00	0.00	0.00	0.00	0.00	0.00	0.12	6.12	14.3	23.8	33.4	45.7	62.5	91.0	155	303	551	802	897	
25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.48	10.9	19.7	28.1	37.5	49.7	67.5	101	172	298	441	515	
30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.46	11.0	19.0	26.3	33.8	42.7	54.0	67.1	84.3	104	126	138	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.11	6.93	14.6	21.3	27.5	34.2	42.0	51.0	61.7	73.6	86.2	94.3	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	6.06	13.0	18.8	23.9	28.6	33.5	38.7	43.7	47.9	50.7	51.8	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.28	7.92	13.6	18.2	22.3	26.2	30.0	33.6	36.7	38.8	40.0	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.31	10.4	14.3	17.6	20.4	22.8	25.0	26.6	27.7	28.2	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.08	4.86	8.72	11.8	14.3	16.4	18.2	19.6	20.6	21.2	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.92	4.51	7.15	9.26	10.8	12.2	13.1	13.8	14.2	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.13	1.93	3.34	4.44	5.26	5.96	6.50	7.14	7.53	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.13	0.65	0.94	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.29	0.45	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.4V I:0.2531A P:18.32W PF:0.6009 Freq:50.00Hz Lamp Flux:870.627x1 lm		
NAME: SP-PZT-R110-3P-RDM-3	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080055
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	12.4	11.7	10.6	9.25	7.74	6.00	4.13	2.14	0.14	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	24.6	23.1	20.8	17.9	14.8	11.2	7.47	3.48	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	48.1	45.2	40.4	34.6	28.3	21.6	15.7	10.7	5.90	3.14	0.40	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	70.9	65.7	57.9	48.8	39.2	29.5	21.9	16.0	10.5	5.22	0.12	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	187	151	110	78.2	57.8	43.0	31.9	22.6	15.3	9.34	3.61	0.29	0.00	0.00	0.00	0.00	0.00	0.00
-20	292	220	147	98.0	69.8	51.7	37.9	25.9	17.6	11.2	5.22	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	995	746	439	227	115	69.7	48.7	34.1	23.2	14.9	8.26	2.10	0.00	0.00	0.00	0.00	0.00	0.00
-10	1622	1147	626	293	134	77.4	53.0	37.4	25.0	15.8	8.82	2.38	0.00	0.00	0.00	0.00	0.00	0.00
-5	2875	2015	1122	511	201	95.9	61.5	43.0	29.7	19.2	11.2	4.41	0.00	0.00	0.00	0.00	0.00	0.00
0	3863	2502	1314	557	205	95.4	61.2	42.6	29.7	19.0	10.7	3.81	0.00	0.00	0.00	0.00	0.00	0.00
5	3582	2475	1371	610	229	103	65.0	45.5	32.3	21.8	12.7	5.38	0.00	0.00	0.00	0.00	0.00	0.00
10	2954	1962	1052	454	176	89.7	59.4	42.3	30.4	20.6	11.5	4.21	0.00	0.00	0.00	0.00	0.00	0.00
15	1971	1403	796	370	159	85.0	57.7	41.9	30.7	21.5	12.5	4.95	0.00	0.00	0.00	0.00	0.00	0.00
20	808	579	332	171	96.9	65.8	48.7	36.3	27.1	18.7	10.1	2.98	0.00	0.00	0.00	0.00	0.00	0.00
25	487	371	234	134	83.1	59.0	44.8	34.4	26.1	18.6	10.4	3.17	0.00	0.00	0.00	0.00	0.00	0.00
30	129	108	87.8	70.7	56.8	45.6	36.4	28.9	22.1	15.2	7.41	0.76	0.00	0.00	0.00	0.00	0.00	0.00
35	92.0	81.0	68.6	57.5	47.8	39.5	32.4	26.0	20.1	13.8	6.58	1.00	0.00	0.00	0.00	0.00	0.00	0.00
40	51.2	48.6	44.8	40.1	35.2	30.3	25.7	20.7	15.6	9.74	2.86	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	39.8	38.4	36.0	32.8	29.3	25.5	21.7	17.6	13.0	7.59	2.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	28.0	27.3	26.0	24.2	21.9	19.3	16.2	12.7	8.36	2.99	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	21.2	20.8	19.8	18.5	16.7	14.5	11.9	8.64	4.80	2.10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	14.3	13.9	13.2	12.1	10.6	8.72	6.37	3.22	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	7.62	7.39	6.87	6.18	5.48	4.58	3.44	1.96	0.16	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.95	0.72	0.27	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.48	0.39	0.19	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-07

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: