

Floodlight Summary:

Report based on lamp delivering 1000 lumens.


Maximum Intensity (Luminaire orientation as tested.)		4738.6 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	45.5V x 42.6H
	At 50% of Imax	23.3V x 22.1H
	At 90% of Imax	8.4V x 8.4H
Beam Flux	Total	995.2 lumens per klm.
	To 10% of Imax	815.9 lumens per klm.
	To 50% of Imax	427.0 lumens per klm.
	To 90% of Imax	64.7 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.5 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.6V I:0.3944A P:29.83W PF:0.6271 Freq:50.01Hz Lamp Flux:1605.93x1 lm		
NAME: SP-PZT-R135-6P-RDM-3	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080057
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

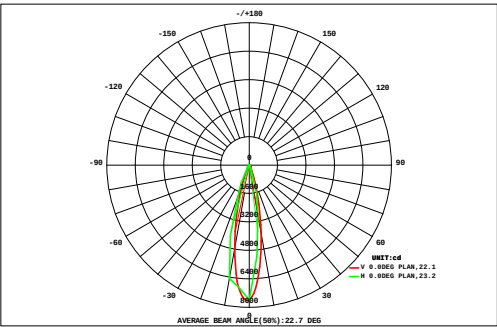

DATA OF LAMP		Eff:53.83lm/W	
MODE	SP-PZT-R135-6P-RDM-3	Imax(cd)	7610
NOMINAL POWER(W)	30	AVAILABILITY(%)	83.2
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	1337
NOMINAL FLUX(lm)	1605.93	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	1606
TEST VOLTAGE(V)	120	θ @50%(H,V)	22,23DEG

		AREA FLUX DIAGRAM															UNIT:lm			Φ t	Φ a
VERTICAL (DEG)	27	0.31	0.38	0.47	0.60	0.77	1.01	1.28	1.54	1.73	1.80	1.73	1.55	1.30	1.03	0.79	0.61	0.47	0.38	17.7	6.34
	24	0.34	0.45	0.64	0.94	1.40	2.02	2.75	3.44	3.94	4.17	4.05	3.62	2.97	2.24	1.59	1.08	0.73	0.51	36.9	27.3
	21	0.41	0.57	0.85	1.30	1.98	2.86	3.86	4.72	5.31	5.49	5.22	4.56	3.64	2.67	1.83	1.20	0.79	0.54	47.8	39.8
	18	0.48	0.69	1.07	1.67	2.58	3.74	5.00	6.03	6.69	6.82	6.37	5.47	4.28	3.06	2.04	1.30	0.83	0.57	58.7	51.5
	15	0.48	0.75	1.31	2.25	3.71	5.62	7.94	10.4	12.4	13.4	13.0	11.3	9.00	6.50	4.38	2.76	1.63	0.95	108	103
	12	0.55	0.93	1.69	2.96	4.89	7.37	10.4	13.5	16.1	17.2	16.4	14.1	11.1	7.89	5.26	3.27	1.88	1.06	136	132
	9	0.72	1.30	2.42	4.22	6.83	10.1	13.8	17.6	20.4	21.0	19.2	16.0	12.0	8.33	5.37	3.23	1.79	0.99	165	161
	6	0.62	1.11	2.07	3.66	6.03	9.12	12.8	16.6	19.7	20.9	19.8	16.9	13.0	9.21	6.08	3.73	2.11	1.14	165	160
	3	0.49	0.86	1.61	2.92	4.96	7.82	11.3	15.2	18.5	20.4	20.0	17.6	13.9	10.1	6.80	4.24	2.45	1.31	160	156
	0	0.70	1.32	2.45	4.25	6.90	10.4	14.3	18.1	20.8	21.3	19.5	16.1	12.0	8.31	5.37	3.17	1.76	0.93	168	163
	-3	0.65	1.22	2.24	3.87	6.26	9.42	13.0	16.5	18.8	19.2	17.7	14.6	11.0	7.60	4.93	2.92	1.63	0.87	152	148
	-6	0.36	0.55	0.93	1.62	2.71	4.28	6.28	8.35	10.1	11.1	11.1	10.1	8.23	6.06	4.16	2.66	1.59	0.93	91.1	85.2
-9	0.36	0.52	0.82	1.37	2.21	3.37	4.73	5.95	6.83	7.25	7.09	6.44	5.27	3.85	2.63	1.69	1.06	0.66	62.1	55.3	
-12	0.38	0.53	0.77	1.21	1.84	2.63	3.36	3.71	3.65	3.36	3.00	2.65	2.13	1.49	0.96	0.63	0.46	0.36	33.1	23.3	
-15	0.25	0.34	0.48	0.70	1.05	1.55	2.19	2.84	3.34	3.61	3.56	3.25	2.74	2.09	1.50	1.03	0.69	0.48	31.7	22.0	
-18	0.20	0.24	0.29	0.34	0.44	0.59	0.83	1.14	1.43	1.63	1.67	1.58	1.41	1.17	0.91	0.68	0.50	0.38	15.4	2.76	
-21	0.20	0.22	0.23	0.20	0.15	0.11	0.10	0.10	0.11	0.10	0.09	0.07	0.06	0.07	0.08	0.12	0.17	0.20	2.36	0.00	
-24	0.16	0.18	0.19	0.18	0.21	0.26	0.31	0.38	0.42	0.45	0.45	0.41	0.36	0.31	0.26	0.22	0.19	0.19	5.13	0.00	
-27	-27	-24	-21	-18	-15	-12	-9	-6	HORIZONTAL(DEG)					6	9	12	15	18	21	24	27
Φ t	7.66	12.2	20.5	34.3	54.9	82.2	114	146	170	179	170	146	114	81.9	55.0	34.5	20.7	12.4	1457	---	
Φ a	0.00	0.00	8.38	24.0	48.0	77.4	112	144	168	177	167	144	112	76.9	46.1	26.8	6.87	0.00	---	1337	


one-half-peak spread: U:7.7,D:15.7 , L:11.2,R:11.1 NEMA Beam Type: Type 3

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.6V I:0.3944A P:29.83W PF:0.6271 Freq:50.01Hz Lamp Flux:1605.93x1 lm		
NAME: SP-PZT-R135-6P-RDM-3	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080057
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

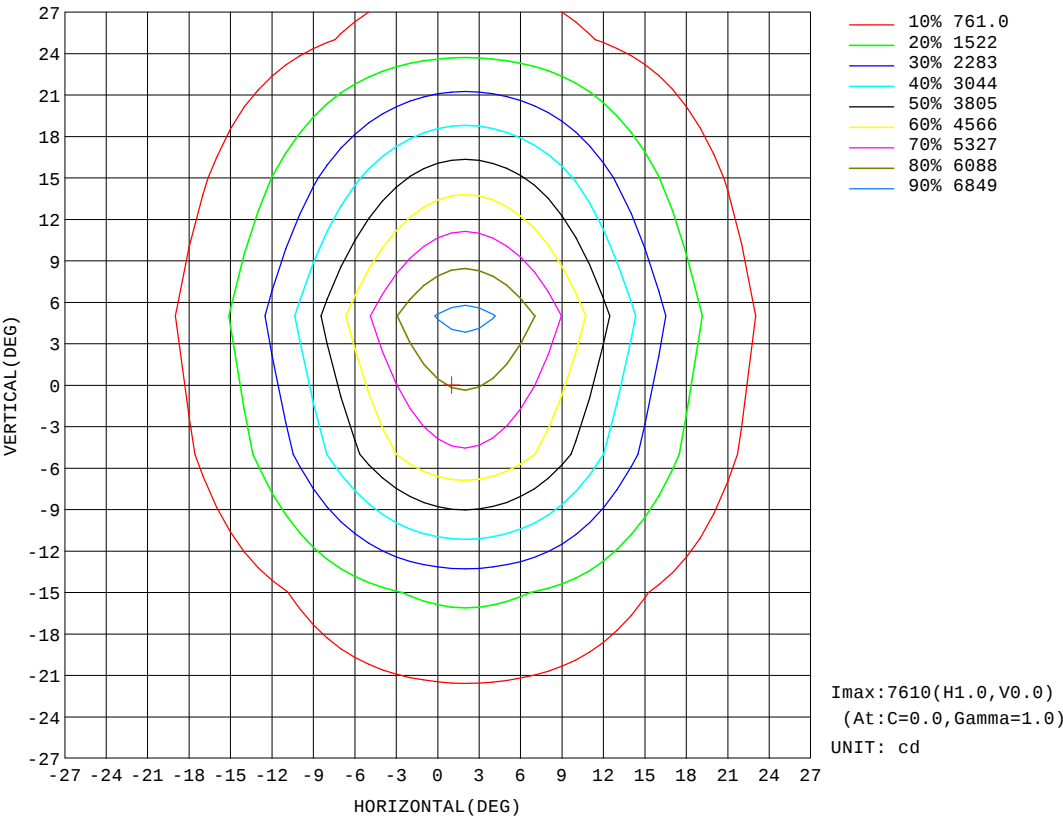


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:120.6V I:0.3944A P:29.83W PF:0.6271 Freq:50.01Hz Lamp Flux:1605.93x1 lm		
NAME: SP-PZT-R135-6P-RDM-3	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080057
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

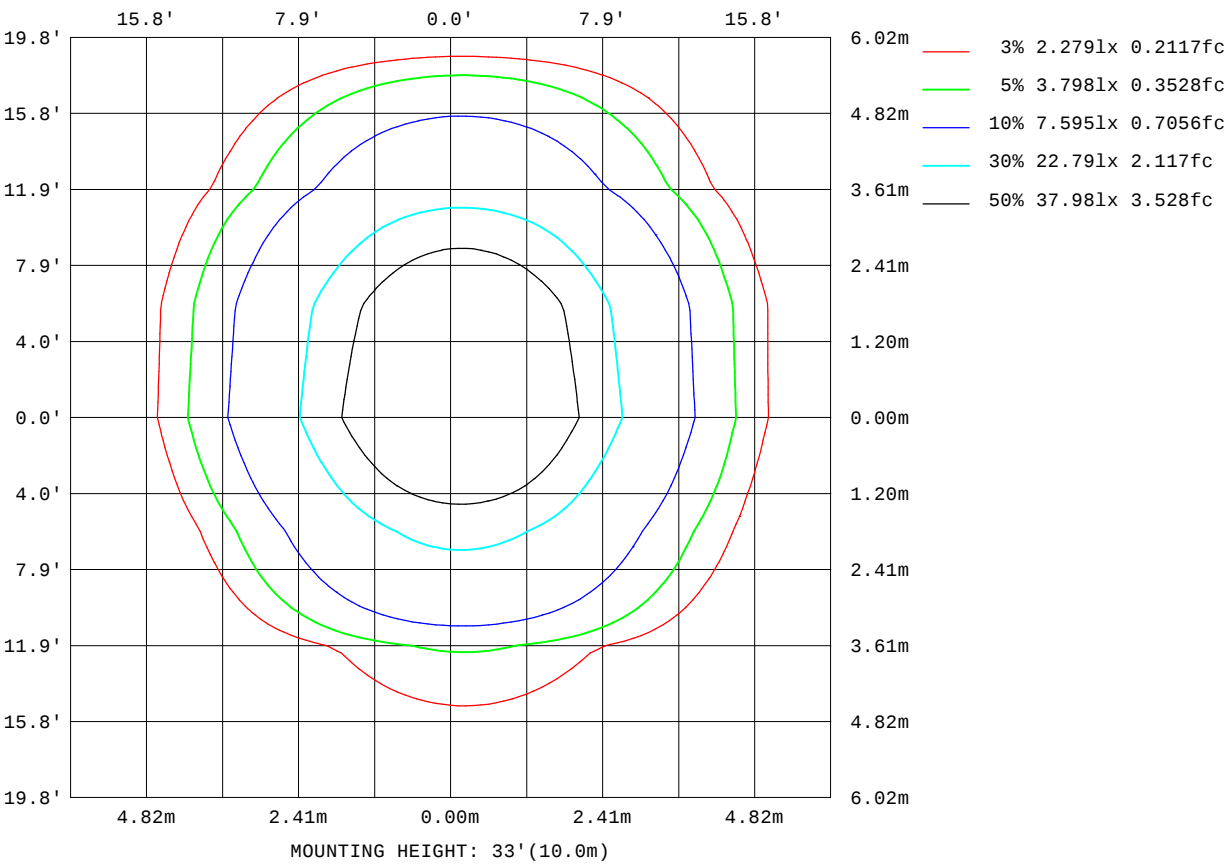

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

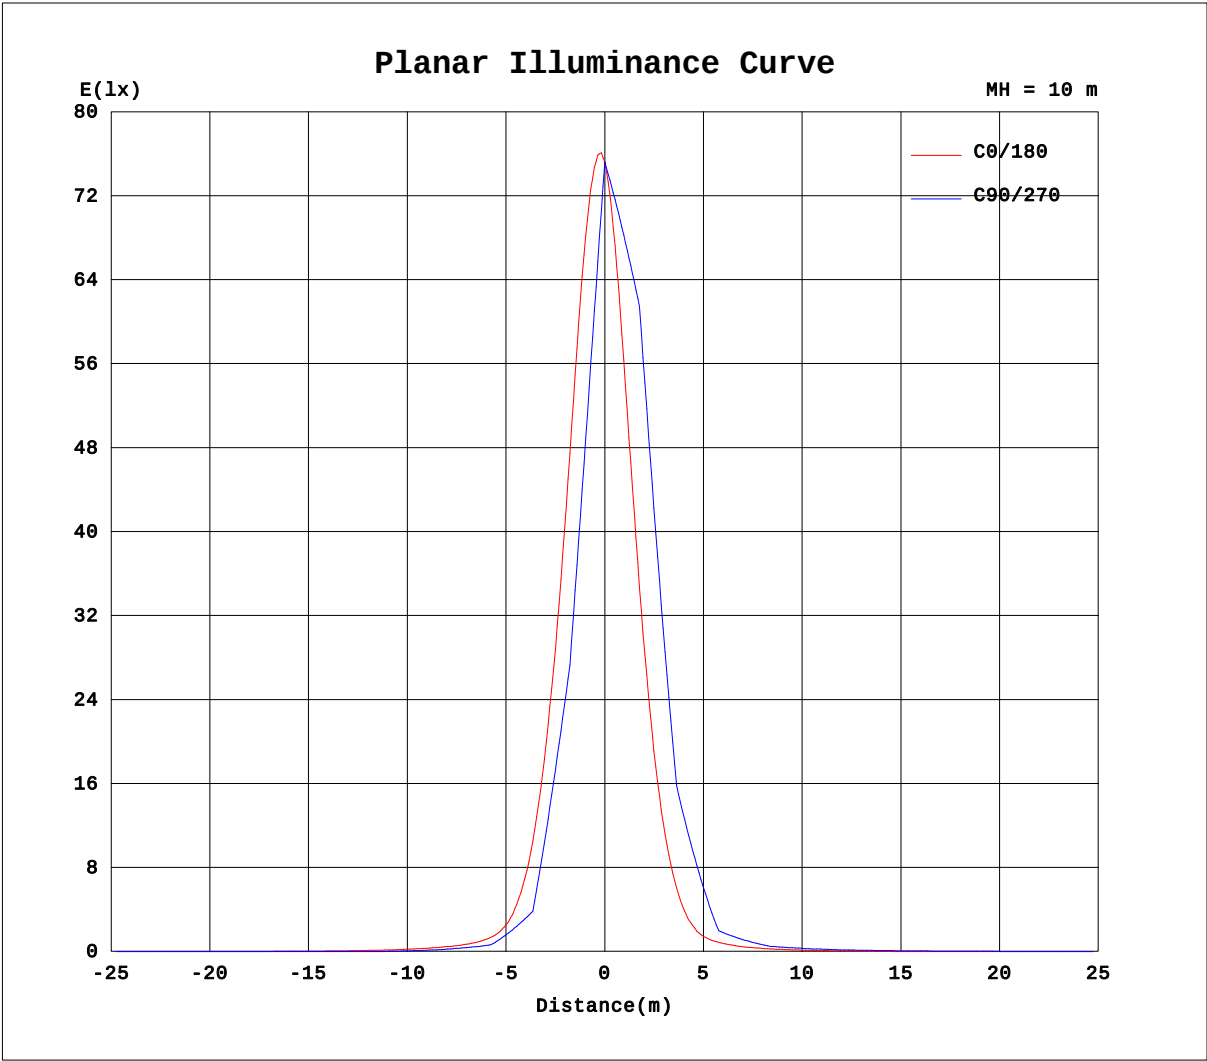


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.6V I:0.3944A P:29.83W PF:0.6271 Freq:50.01Hz Lamp Flux:1605.93x1 lm		
NAME: SP-PZT-R135-6P-RDM-3	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080057
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

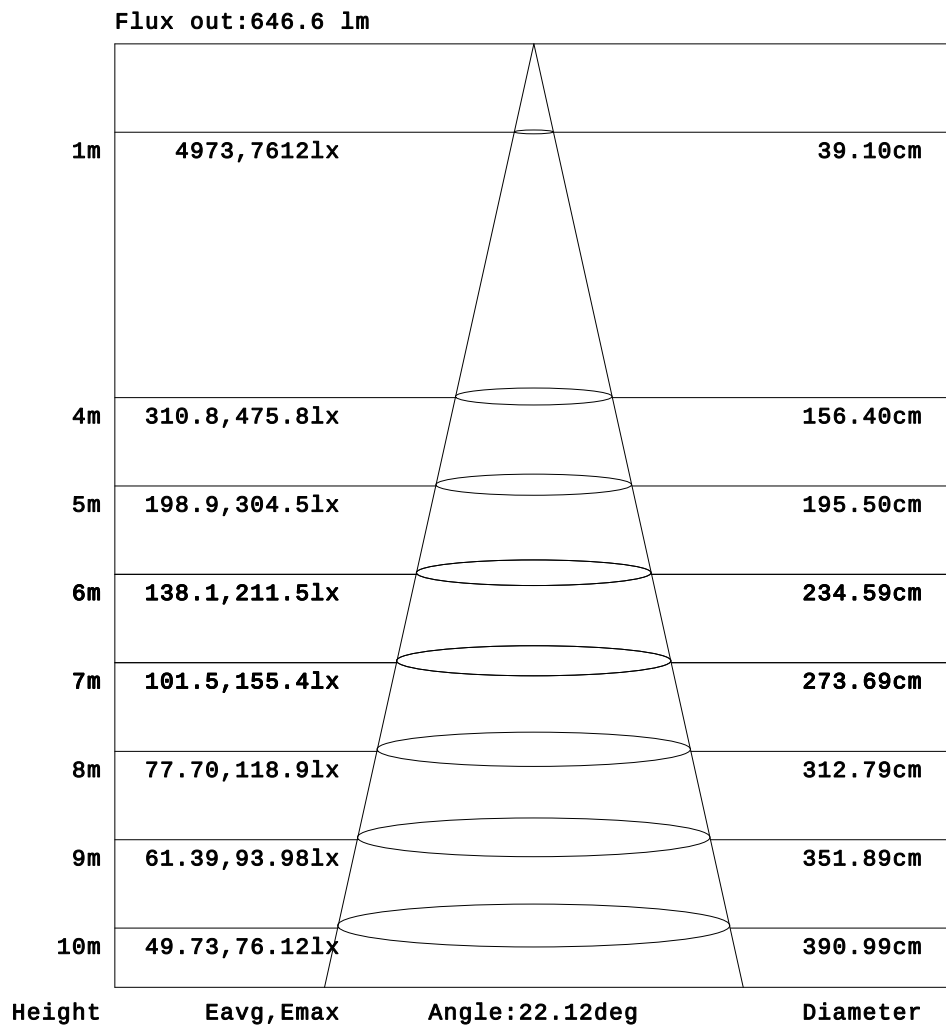

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.6V I:0.3944A P:29.83W PF:0.6271 Freq:50.01Hz Lamp Flux:1605.93x1 lm		
NAME: SP-PZT-R135-6P-RDM-3	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080057
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																	UNIT: cd			
H(DEG) V(DEG)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0	
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.81	3.25	5.19	7.31	9.62	11.9	14.3	16.7	19.6	21.5	
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.67	7.29	11.2	15.5	20.2	24.8	29.5	34.6	40.1	43.3	
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.31	6.49	12.2	17.6	24.0	31.3	39.6	49.2	58.1	66.0	70.8	
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.03	12.6	19.2	26.5	35.3	45.4	58.1	72.7	84.9	94.4	99.3	
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.32	9.02	17.4	26.5	36.8	49.5	66.5	89.5	123	171	233	280	
-20	0.00	0.00	0.00	0.00	0.00	0.00	0.00	6.47	15.2	25.7	37.8	51.7	69.7	95.8	132	190	280	396	469	
-15	0.00	0.00	0.00	0.00	0.00	0.00	0.21	7.67	18.0	29.1	41.9	58.1	81.3	124	219	439	839	1335	1645	
-10	0.00	0.00	0.00	0.00	0.00	0.00	1.84	13.1	25.0	37.4	51.9	72.3	106	178	367	819	1598	2444	2872	
-5	0.00	0.00	0.00	0.00	0.00	0.00	1.84	13.3	25.2	38.0	53.3	75.7	114	201	490	1178	2419	4007	5131	
0	0.00	0.00	0.00	0.00	0.00	0.00	5.83	18.2	30.2	44.2	62.0	91.1	145	298	809	1940	3864	6161	7569	
5	0.00	0.00	0.00	0.00	0.00	0.00	4.10	16.1	28.1	41.7	59.4	86.5	132	241	626	1549	3173	5274	6891	
10	0.00	0.00	0.00	0.00	0.00	0.00	7.30	18.6	31.0	45.4	65.8	96.2	146	280	711	1700	3284	5208	6478	
15	0.00	0.00	0.00	0.00	0.00	0.00	4.60	15.5	27.3	41.1	59.6	84.8	122	199	428	987	1960	3189	4120	
20	0.00	0.00	0.00	0.00	0.00	0.00	6.12	16.8	28.8	43.3	62.3	85.9	119	173	310	606	1107	1639	1917	
25	0.00	0.00	0.00	0.00	0.00	0.00	2.65	12.1	23.4	36.6	53.4	71.8	96.9	132	201	345	600	905	1097	
30	0.00	0.00	0.00	0.00	0.00	0.00	2.63	11.7	22.8	36.2	51.2	66.5	86.4	109	135	169	216	272	307	
35	0.00	0.00	0.00	0.00	0.00	0.00	0.52	6.68	16.6	28.5	42.3	55.0	70.0	87.2	106	127	154	185	209	
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.27	14.7	26.4	38.4	49.1	60.4	72.7	84.1	94.9	104	111	114	
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.89	7.83	17.3	28.8	38.5	47.7	57.8	67.3	75.6	82.5	87.6	90.5	
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	4.33	12.7	23.4	31.6	39.0	47.0	54.0	59.4	63.5	66.3	67.7	
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.50	5.36	13.1	21.3	28.1	34.6	41.0	46.2	50.1	52.8	54.2	
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.24	6.53	13.8	19.8	24.9	30.3	34.8	38.0	40.0	41.0	
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.45	6.22	9.33	13.3	17.5	21.5	24.9	27.3	28.6	
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.16	3.35	6.44	9.65	13.0	15.2	16.5	
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.35	2.91	4.49	6.21	7.45	8.14	
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-07

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.6V I:0.3944A P:29.83W PF:0.6271 Freq:50.01Hz Lamp Flux:1605.93x1 lm		
NAME: SP-PZT-R135-6P-RDM-3	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080057
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2

UNIT: cd

H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	22.0	21.6	20.0	17.7	14.9	12.4	10.0	7.67	5.27	2.82	0.39	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	44.1	42.7	39.3	34.2	28.7	23.8	19.1	14.4	9.59	4.65	0.15	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	71.7	69.2	64.0	56.7	48.4	40.1	31.8	24.5	17.8	11.4	5.41	1.59	0.00	0.00	0.00	0.00	0.00	0.00
-30	98.9	94.0	86.0	75.9	64.9	52.8	41.4	31.8	23.4	15.7	8.67	1.86	0.00	0.00	0.00	0.00	0.00	0.00
-25	277	229	174	131	99.2	77.6	60.2	45.4	33.9	24.3	15.4	6.81	0.82	0.00	0.00	0.00	0.00	0.00
-20	441	341	244	170	124	94.8	72.6	54.0	40.4	29.2	18.8	8.51	0.44	0.00	0.00	0.00	0.00	0.00
-15	1611	1271	784	416	217	132	94.2	68.6	50.0	36.6	25.1	14.3	4.36	0.00	0.00	0.00	0.00	0.00
-10	2686	2011	1150	555	260	150	104	74.8	53.7	39.1	27.2	16.0	4.76	0.00	0.00	0.00	0.00	0.00
-5	4982	3694	2142	1024	419	195	123	87.9	62.4	44.7	31.5	19.9	8.70	0.00	0.00	0.00	0.00	0.00
0	6913	4739	2614	1163	436	198	125	89.8	63.0	44.4	31.1	19.3	8.02	0.00	0.00	0.00	0.00	0.00
5	6681	4875	2793	1320	515	222	135	97.0	69.8	49.3	34.3	22.2	10.9	0.39	0.00	0.00	0.00	0.00
10	5923	4141	2281	1046	413	194	126	92.4	67.5	47.5	32.4	20.5	9.31	0.00	0.00	0.00	0.00	0.00
15	4006	2988	1747	853	369	186	124	92.3	69.2	50.0	34.1	21.9	10.8	0.50	0.00	0.00	0.00	0.00
20	1788	1326	786	404	219	143	107	81.9	62.7	45.6	30.5	18.6	7.92	0.00	0.00	0.00	0.00	0.00
25	1073	845	543	312	187	130	99.9	78.5	61.4	45.9	31.2	19.1	8.63	0.12	0.00	0.00	0.00	0.00
30	292	244	192	153	125	102	83.1	67.8	53.9	40.1	26.6	15.2	5.26	0.00	0.00	0.00	0.00	0.00
35	206	182	152	127	107	89.7	75.1	62.4	50.3	37.9	25.4	14.3	4.75	0.00	0.00	0.00	0.00	0.00
40	113	109	101	91.7	81.4	71.4	61.8	52.1	41.9	30.6	19.3	9.44	0.71	0.00	0.00	0.00	0.00	0.00
45	90.7	88.1	83.5	77.2	69.9	62.2	54.4	46.2	37.1	27.2	16.9	7.56	1.14	0.00	0.00	0.00	0.00	0.00
50	67.7	66.2	63.6	60.0	55.3	50.0	43.8	36.8	28.5	19.7	10.3	2.33	0.00	0.00	0.00	0.00	0.00	0.00
55	54.5	53.7	51.9	49.2	45.4	41.0	35.8	29.6	22.4	14.8	6.61	1.92	0.00	0.00	0.00	0.00	0.00	0.00
60	41.3	40.6	39.2	37.0	33.9	30.2	25.4	19.6	13.2	6.59	0.21	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	29.1	28.8	27.8	26.0	23.6	20.4	16.4	11.8	7.23	4.03	0.51	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	16.9	16.7	15.7	14.2	12.0	9.18	5.54	1.92	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	8.46	8.38	7.98	7.25	6.25	4.90	3.15	1.32	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-07

V(β) Range:-80 - 80DEG
V(β) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: