


Floodlight Summary:

Report based on lamp delivering 1000 lumens.

Maximum Intensity (Luminaire orientation as tested.)		3415.5 cd per klm. 0.0 degrees vertical 0.0 degrees horizontal
Beam Spread	At 10% of Imax	54.8V x 50.8H
	At 50% of Imax	28.1V x 26.8H
	At 90% of Imax	6.9V x 10.9H
Beam Flux	Total	999.1 lumens per klm.
	To 10% of Imax	794.9 lumens per klm.
	To 50% of Imax	408.4 lumens per klm.
	To 90% of Imax	46.8 lumens per klm.
Upward LOR		0.0 %
Downward LOR		99.9 %
Luminaire Efficiency(Light Output Ratio)		100.0 %

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.6V I:0.2559A P:18.31W PF:0.5932 Freq:50.00Hz Lamp Flux:835.298x1 lm		
NAME: SP-PZT-R110-3P-RDM-5	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080069
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

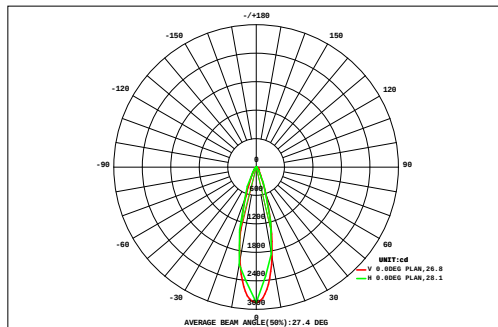

DATA OF LAMP		Eff:45.62lm/W	
MODE	SP-PZT-R110-3P-RDM-5	Imax(cd)	2853
NOMINAL POWER(W)	18	AVAILABILITY(%)	80.0
RATED VOLTAGE(V)	120	Avai. FLUX(lm)	668.2
NOMINAL FLUX(lm)	835.298	LOR(%)	100.0
LAMPS INSIDE	1	TOTAL FLUX(lm)	835.3
TEST VOLTAGE(V)	120	θ @50%(H,V)	27,28DEG

VERTICAL (DEG)	AREA FLUX DIAGRAM																UNIT:lm				Φ t	Φ a
	45	0.11	0.16	0.22	0.28	0.34	0.40	0.45	0.50	0.54	0.55	0.53	0.49	0.44	0.38	0.32	0.26	0.21	0.15	6.32	0.00	
	40	0.18	0.24	0.31	0.38	0.46	0.53	0.60	0.66	0.70	0.69	0.65	0.59	0.51	0.43	0.36	0.29	0.22	0.15	7.95	0.00	
	35	0.17	0.24	0.33	0.44	0.57	0.71	0.87	1.04	1.20	1.27	1.20	1.03	0.85	0.69	0.54	0.42	0.32	0.23	12.1	0.00	
	30	0.25	0.34	0.46	0.61	0.79	0.99	1.23	1.48	1.67	1.68	1.48	1.21	0.96	0.75	0.58	0.43	0.32	0.22	15.4	0.00	
	25	0.23	0.33	0.47	0.68	0.99	1.48	2.19	3.09	4.02	4.46	4.00	3.03	2.12	1.43	0.96	0.65	0.45	0.31	30.9	21.3	
	20	0.32	0.46	0.67	1.01	1.55	2.42	3.66	5.12	6.29	6.27	5.02	3.51	2.31	1.48	0.94	0.62	0.42	0.27	42.4	33.8	
	15	0.26	0.40	0.59	0.92	1.59	2.97	5.43	8.76	11.9	13.3	12.1	9.01	5.65	3.12	1.66	0.94	0.59	0.38	79.5	72.8	
	10	0.36	0.55	0.85	1.47	2.81	5.55	9.92	14.8	18.2	18.0	14.7	9.85	5.51	2.75	1.39	0.79	0.49	0.31	108	102	
	5	0.28	0.43	0.65	1.03	1.88	3.87	7.75	13.2	18.1	20.3	18.8	14.1	8.60	4.39	2.12	1.11	0.65	0.40	118	111	
	0	0.38	0.58	0.92	1.64	3.40	7.11	13.1	19.4	23.0	22.5	18.1	11.8	6.07	2.81	1.39	0.78	0.48	0.28	134	128	
	-5	0.25	0.39	0.59	0.92	1.53	2.89	5.63	9.80	14.0	16.1	15.1	11.7	7.44	3.96	1.96	1.04	0.61	0.36	94.4	87.9	
	-10	0.32	0.50	0.78	1.31	2.35	4.27	7.12	10.2	12.2	11.8	9.17	6.02	3.48	1.89	1.05	0.64	0.39	0.22	73.7	67.1	
	-15	0.20	0.31	0.47	0.67	0.98	1.50	2.46	3.99	5.80	6.96	6.64	5.23	3.58	2.20	1.26	0.73	0.44	0.27	43.7	35.8	
	-20	0.24	0.37	0.54	0.77	1.05	1.38	1.72	2.05	2.22	1.89	1.36	0.95	0.75	0.64	0.52	0.35	0.22	0.15	17.2	6.07	
	-25	0.12	0.20	0.31	0.44	0.60	0.79	1.03	1.36	1.75	2.06	2.00	1.64	1.23	0.88	0.60	0.41	0.27	0.17	15.9	2.43	
	-30	0.13	0.20	0.31	0.41	0.52	0.60	0.63	0.60	0.52	0.44	0.40	0.37	0.33	0.27	0.23	0.18	0.14	0.09	6.36	0.00	
	-35	0.04	0.08	0.13	0.20	0.28	0.37	0.45	0.53	0.59	0.63	0.61	0.54	0.46	0.37	0.28	0.20	0.14	0.09	5.99	0.00	
	-40	0.02	0.05	0.09	0.13	0.18	0.22	0.25	0.26	0.24	0.21	0.20	0.18	0.17	0.15	0.12	0.09	0.06	0.03	2.64	0.00	
-45	-40	-35	-30	-25	-20	-15	-10	HORIZONTAL (DEG)				10	15	20	25	30	35	40	45			
Φ t	3.83	5.84	8.69	13.3	21.9	38.1	64.5	96.9	123	129	112	81.3	50.5	28.6	16.3	9.95	6.39	4.07	814	---		
Φ a	0.00	0.00	0.00	0.50	9.39	28.9	56.4	89.5	116	122	105	74.5	43.4	19.4	2.98	0.00	0.00	0.00	---	668		

one-half-peak spread: U:13.5,D:14.8 , L:13.2,R:13.8


NEMA Beam Type: Type 4

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

Test:U:120.6V I:0.2559A P:18.31W PF:0.5932 Freq:50.00Hz Lamp Flux:835.298x1 lm		
NAME: SP-PZT-R110-3P-RDM-5	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080069
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

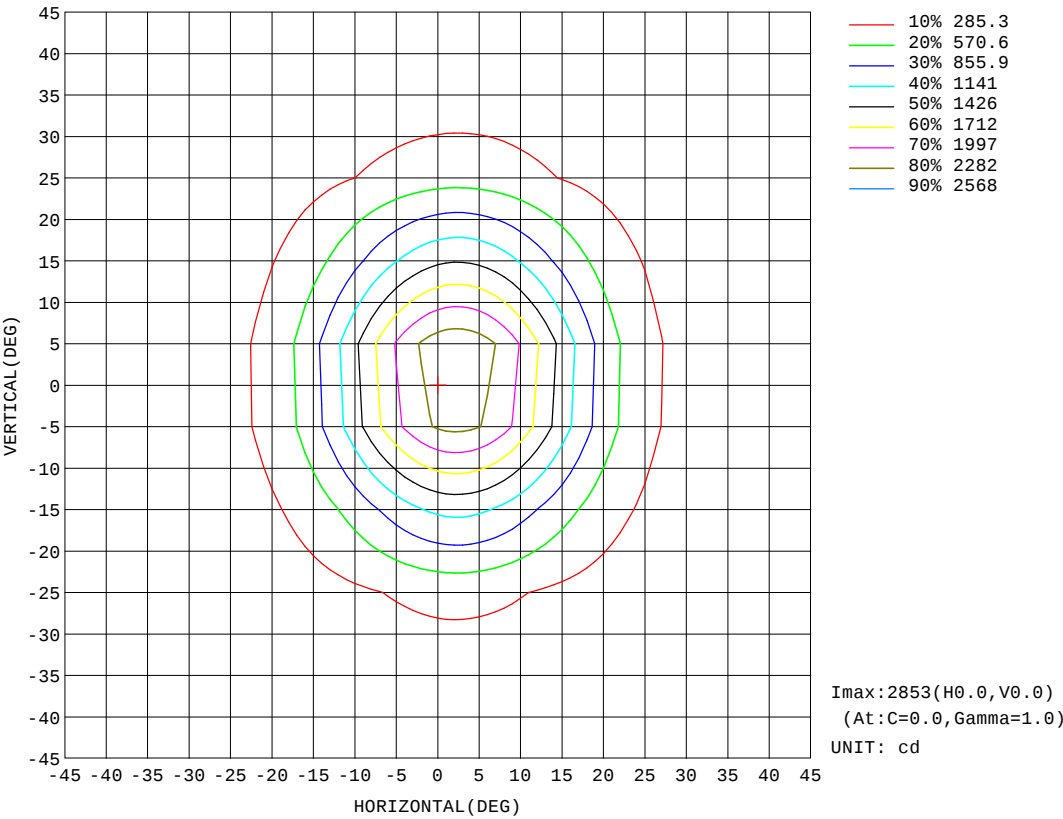


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

ISOLUX DIAGRAM


Test:U:120.6V I:0.2559A P:18.31W PF:0.5932 Freq:50.00Hz Lamp Flux:835.298x1 lm		
NAME: SP-PZT-R110-3P-RDM-5	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080069
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

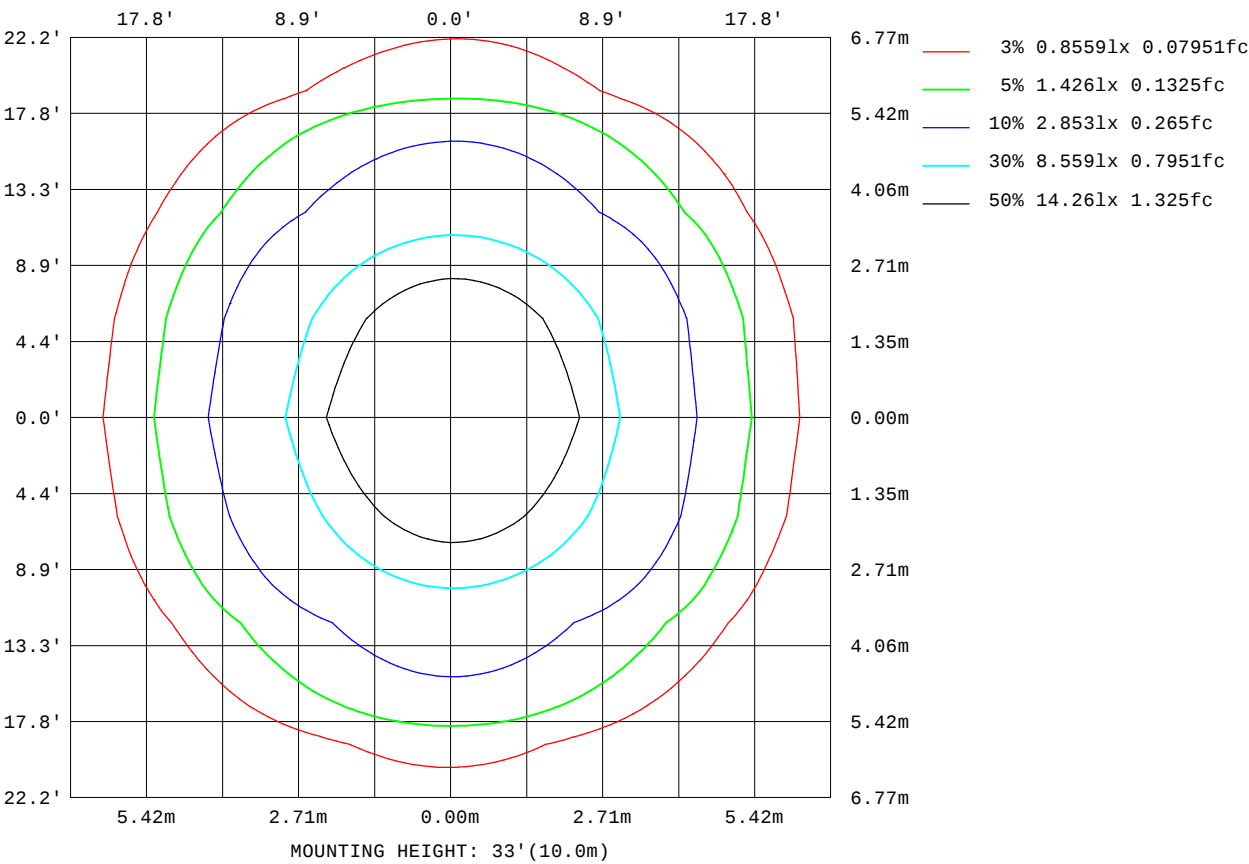

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

Planar Illuminance Curve

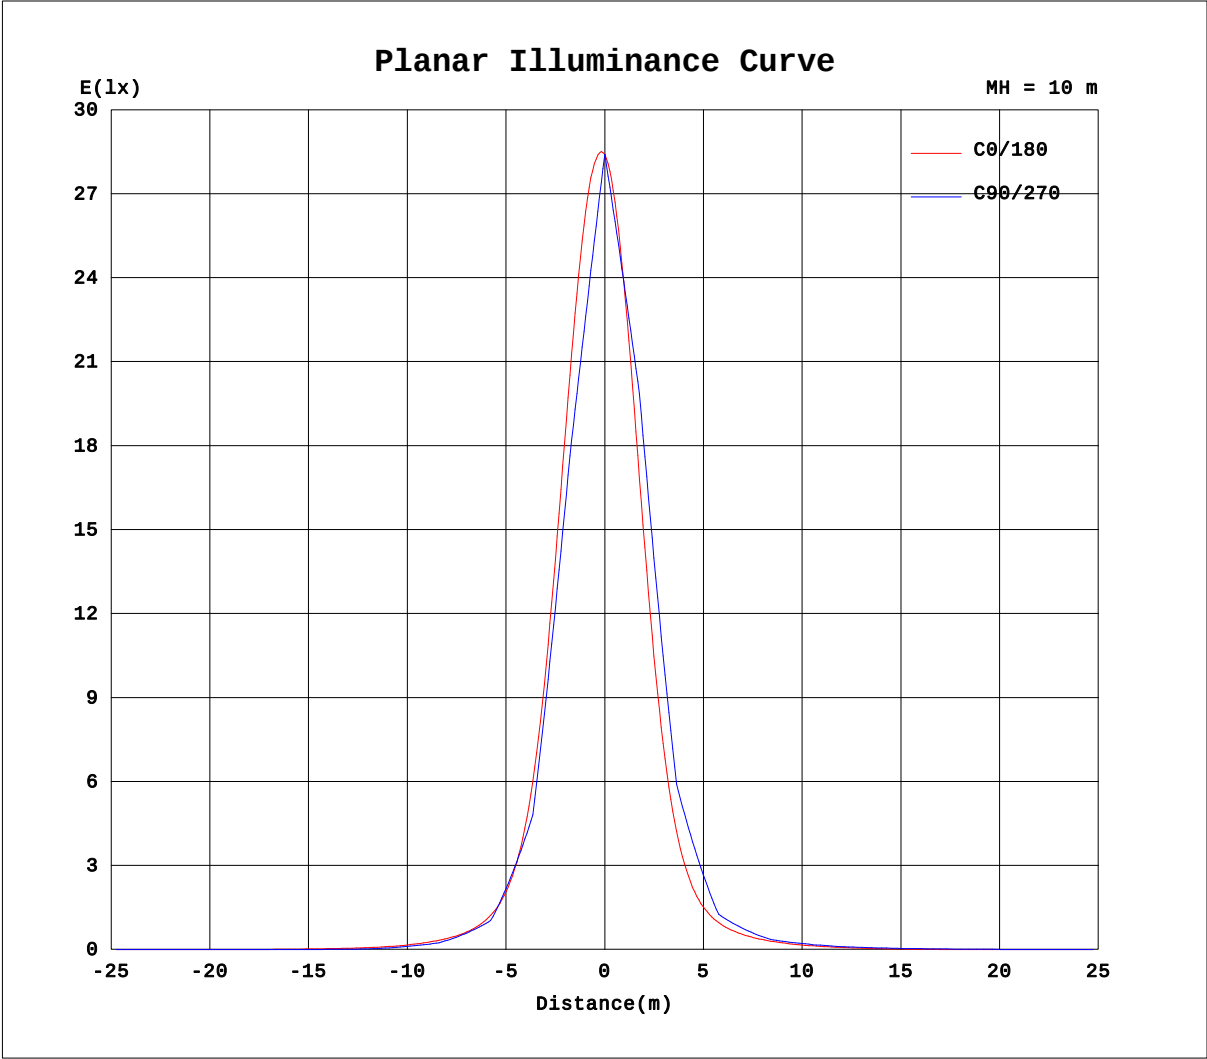


H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

AAI Figure

Test:U:120.6V I:0.2559A P:18.31W PF:0.5932 Freq:50.00Hz Lamp Flux:835.298x1 lm		
NAME: SP-PZT-R110-3P-RDM-5	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080069
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

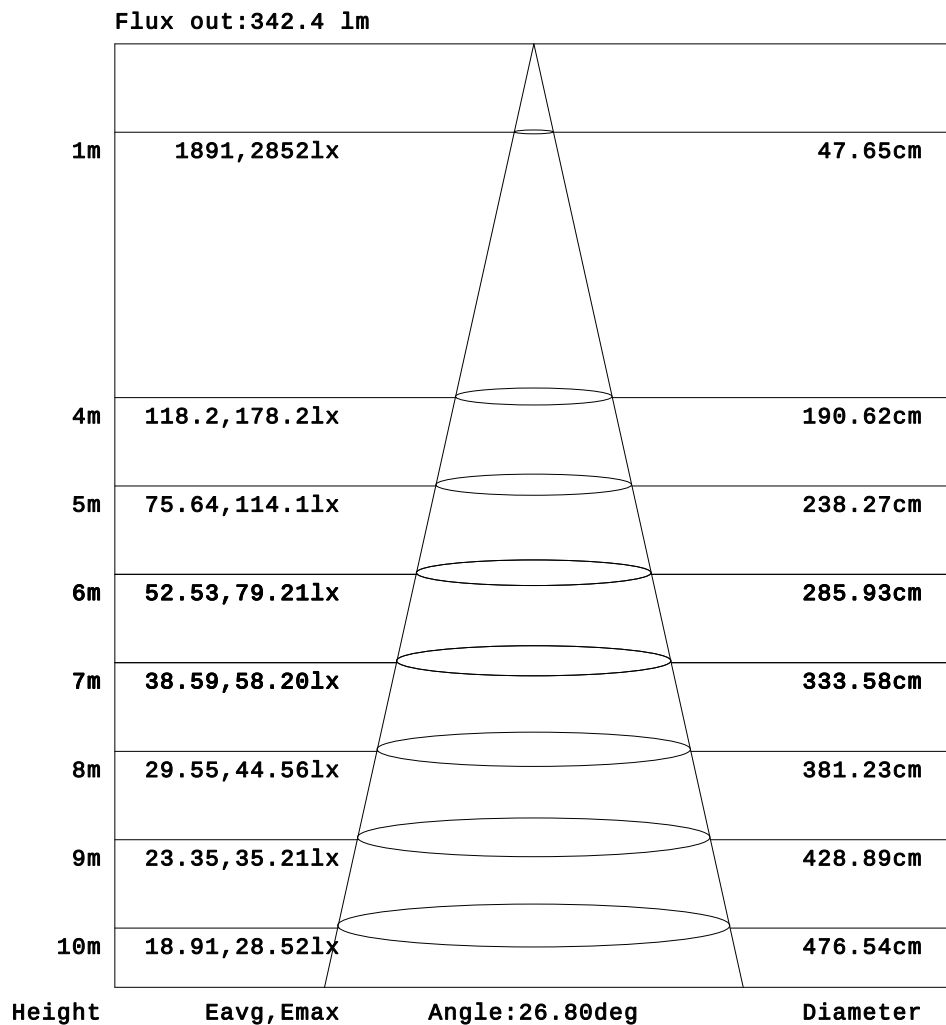

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.6V I:0.2559A P:18.31W PF:0.5932 Freq:50.00Hz Lamp Flux:835.298x1 lm		
NAME: SP-PZT-R110-3P-RDM-5	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080069
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--1																		UNIT: cd	
H(°) \ V(°)	-90	-85	-80	-75	-70	-65	-60	-55	-50	-45	-40	-35	-30	-25	-20	-15	-10	-5	0
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.80	2.14	3.26	4.16	4.84
-50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.01	2.71	5.23	7.30	8.92	10.1
-45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.48	3.47	6.55	10.0	14.5	20.1	25.4	29.5	32.2	33.2
-40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.30	9.45	15.8	22.8	30.9	39.5	47.1	52.6	55.5	55.5
-35	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.82	8.58	16.2	25.4	36.7	48.8	62.2	75.8	88.7	100	108
-30	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.49	11.1	19.7	30.2	44.1	59.9	77.2	95.8	115	135	153	160
-25	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.88	12.2	22.2	34.8	50.6	70.7	96.1	130	176	238	309	365
-20	0.00	0.00	0.00	0.00	0.00	0.00	2.40	11.3	20.9	33.8	51.3	72.3	100	139	197	280	396	519	584
-15	0.00	0.00	0.00	0.00	0.00	0.00	1.42	9.84	19.9	33.3	50.7	72.9	104	156	252	424	684	982	1195
-10	0.00	0.00	0.00	0.00	0.00	0.00	6.45	15.9	28.7	45.6	66.4	95.4	143	236	423	755	1212	1652	1859
-5	0.00	0.00	0.00	0.00	0.00	0.00	3.88	13.3	25.4	41.3	60.7	86.9	128	209	388	749	1312	1925	2314
0	0.00	0.00	0.00	0.00	0.00	0.00	8.65	19.4	34.0	51.5	73.7	106	164	291	585	1148	1920	2590	2853
5	0.00	0.00	0.00	0.00	0.00	0.00	4.76	14.7	27.8	43.5	62.6	88.4	130	212	399	780	1376	2021	2428
10	0.00	0.00	0.00	0.00	0.00	0.01	8.34	19.6	33.6	49.6	69.8	98.4	147	247	458	841	1368	1860	2094
15	0.00	0.00	0.00	0.00	0.00	0.00	3.88	13.8	26.3	40.4	56.7	77.9	110	166	276	478	785	1131	1374
20	0.00	0.00	0.00	0.00	0.00	0.00	6.74	17.4	29.8	43.3	59.1	79.5	109	156	229	340	483	636	719
25	0.00	0.00	0.00	0.00	0.00	0.00	1.58	10.5	21.6	33.4	46.1	61.2	80.6	108	148	207	285	375	447
30	0.00	0.00	0.00	0.00	0.00	0.00	2.91	12.0	22.6	33.3	44.4	57.0	71.7	89.0	109	132	157	182	195
35	0.00	0.00	0.00	0.00	0.00	0.00	0.01	5.28	14.5	24.1	33.5	43.4	54.1	66.2	79.6	94.1	110	125	137
40	0.00	0.00	0.00	0.00	0.00	0.00	0.00	5.56	14.1	22.6	30.4	38.1	45.9	53.8	61.4	68.7	75.2	80.0	81.9
45	0.00	0.00	0.00	0.00	0.00	0.00	0.00	1.21	6.00	13.5	20.7	27.3	33.6	39.8	45.7	51.2	56.0	59.7	61.8
50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	3.89	10.4	16.3	21.6	26.4	30.7	34.4	37.6	40.1	41.7	42.2
55	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.67	3.91	7.50	12.2	16.4	20.1	23.3	26.0	28.1	29.6	30.3
60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	2.64	6.33	9.53	12.2	14.5	16.2	17.5	18.3	18.6
65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.50	2.46	4.15	5.57	6.80	7.78	8.53	9.03	9.26
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.6V I:0.2559A P:18.31W PF:0.5932 Freq:50.00Hz Lamp Flux:835.298x1 lm		
NAME: SP-PZT-R110-3P-RDM-5	TYPE:LED	WEIGHT:
SPEC.:	DIM.:	SERIAL No.:2025080069
MFR.: TPK OPTOELECTRONIC TECH CO., LTD	SUR.:	Shielding Angle:

Table--2																	UNIT: cd	
H(°) \ V(°)	5	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90
-90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-65	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-60	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-55	5.53	5.47	4.97	4.12	2.82	1.46	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-50	11.0	10.7	9.37	7.32	4.61	1.63	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-45	32.7	30.8	27.7	23.9	19.6	14.7	10.1	7.09	4.18	0.59	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-40	53.1	48.8	43.3	37.1	30.4	23.9	17.7	11.9	5.98	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-35	106	95.4	81.4	66.0	51.7	39.8	30.2	21.7	14.2	6.75	2.32	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-30	151	132	107	83.0	62.7	47.6	35.6	25.5	16.9	9.38	1.28	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-25	361	300	227	165	116	81.3	55.6	37.9	25.9	16.5	8.04	0.98	0.00	0.00	0.00	0.00	0.00	0.00
-20	530	410	295	205	138	92.0	59.2	40.0	26.9	16.8	7.96	0.00	0.00	0.00	0.00	0.00	0.00	0.00
-15	1185	969	680	423	247	145	91.0	58.3	37.7	24.2	14.1	4.36	0.00	0.00	0.00	0.00	0.00	0.00
-10	1703	1299	844	478	255	147	93.1	58.5	36.4	23.2	12.8	2.39	0.00	0.00	0.00	0.00	0.00	0.00
-5	2292	1882	1276	721	370	197	118	76.0	48.4	29.9	18.0	7.80	0.00	0.00	0.00	0.00	0.00	0.00
0	2632	2001	1228	630	311	171	105	69.6	43.0	26.3	14.9	4.26	0.00	0.00	0.00	0.00	0.00	0.00
5	2408	1979	1338	750	382	203	122	80.9	53.8	32.8	19.4	9.02	0.00	0.00	0.00	0.00	0.00	0.00
10	1926	1467	937	519	273	156	101	68.7	45.7	27.2	15.4	4.65	0.00	0.00	0.00	0.00	0.00	0.00
15	1368	1118	776	472	272	160	105	73.0	50.8	31.8	18.3	7.92	0.00	0.00	0.00	0.00	0.00	0.00
20	655	500	351	238	161	111	80.0	57.9	40.1	24.0	12.9	2.40	0.00	0.00	0.00	0.00	0.00	0.00
25	445	369	275	199	143	103	76.8	57.4	41.6	26.5	14.6	4.63	0.00	0.00	0.00	0.00	0.00	0.00
30	187	161	134	110	89.3	71.7	56.9	43.8	31.2	18.3	8.55	0.00	0.00	0.00	0.00	0.00	0.00	0.00
35	137	125	108	91.4	76.6	63.3	51.6	40.8	30.1	18.4	8.54	1.31	0.00	0.00	0.00	0.00	0.00	0.00
40	80.2	75.1	68.3	60.7	52.9	45.2	37.5	29.4	19.8	10.00	1.51	0.00	0.00	0.00	0.00	0.00	0.00	0.00
45	61.7	59.1	54.8	49.7	44.1	38.3	32.2	25.4	17.4	8.42	2.40	0.00	0.00	0.00	0.00	0.00	0.00	0.00
50	41.6	40.0	37.5	34.3	30.7	26.5	21.7	15.5	7.73	0.50	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
55	30.3	29.4	27.8	25.5	22.8	19.6	15.7	10.4	5.47	1.58	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
60	18.4	17.7	16.4	14.7	12.6	9.83	5.81	0.41	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
65	9.28	9.00	8.48	7.73	6.75	5.53	3.81	1.34	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
70	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
75	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
80	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
85	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
90	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

H(β) Range:-90 - 90DEG
H(β) Interval: 1.0DEG
Test Speed: HIGH
Temperature:28.0DEG
Operators:QC1
Test Date:2025-08-08

V(B) Range:-80 - 80DEG
V(B) Interval: 5.0DEG
Test System:EVERFINE G0-2000B_V1 SYSTEM V2.0.354
Humidity:83%
Test Distance:8.300m [K=1.0000]
Remarks: